Environmental Technology Verification Report

Baghouse Filtration Products

BHA Group, Inc. QP131 Filter Sample

Prepared by





Under a Cooperative Agreement with





Environmental Technology Verification Report

Baghouse Filtration Products

BHA Group, Inc. QP131 Filter Sample

Prepared by

Air Pollution Control Technology Verification Center

ETS, Incorporated 1401 Municipal Road Roanoke, VA 24012

EPA Cooperative Agreement CR 826152-01-3

EPA Project Manager: Theodore G. Brna Air Pollution Prevention and Control Division National Risk Management Research Laboratory Office of Research and Development U.S. Environmental Protection Agency Research Triangle Park, NC 27711

September 2001

Notice

This document was prepared by ETS, Inc. (ETS) under a contract with RTI with funding from Cooperative Agreement No. CR826152-01-3 with the U.S. Environmental Protection Agency (EPA). The document has been subjected to RTI/EPA's peer and administrative reviews and has been approved for publication. Mention of corporation names, trade names, or commercial products does not constitute endorsement or recommendation for use of specific products.

Availability of Verification Statement and Report

Copies of the public Verification Statement and Verification Report are available from the following:

1. RTI

P.O. Box 12194 Research Triangle Park, NC 27709-2194

http://etv.rti.org/apct/documents.cfm
http://www.epa.gov/etv (click on partners)

2. USEPA / APPCD

MD-4

Research Triangle Park, NC 27711

Website: http://www.epa.gov/etv/library.htm (electronic copy)

http://www.epa.gov/ncepihom/

Abstract

Baghouse filtration products (BFPs) were evaluated by the Air Pollution Control Technology (APCT) Verification Center. The performance factor verified was the mean outlet particle concentration for the filter fabric as a function of the size of those particles equal to and smaller than 2.5 μm in aerodynamic diameter (PM_{2.5}). The APCT Verification Center developed a generic verification protocol for testing baghouse filtration products that is based on a modified Verein Deutscher Ingenieure (VDI) Method 3926. The protocol was developed by RTI and ETS, Inc. (ETS), reviewed by a technical panel of experts, and approved by the U.S. Environmental Protection Agency (EPA). The protocol addresses several issues that VDI Method 3926 does not cover, including periodic testing, acquisition of BFP samples for testing, and product definition. A test/quality assurance plan and a standard operating procedure were prepared to address the test procedure, quality assurance, quality control requirements for obtaining verification data of sufficient quantity and quality to satisfy the data quality objectives.

ETS performed tests on BHA Group's filter sample QP131 during January 30 - February 2, 2001. Mean outlet particle concentrations for total mass and PM_{2.5} were determined. In addition, the following verification parameters were measured and reported: initial residual pressure drop, residual pressure drop increase, average residual pressure drop, average filtration cycle time, and mass gain of the filter sample.

Table of Contents

	<u>Page</u>
Verification S	Statement
Notice	vi
Availability o	of Verification Statement and Reportvii
Abstract	ix
List of Figure	es
List of Tables	s
List of Abbre	eviations and Acronyms
Acknowledgr	ments xiv
Section 1.	Introduction
Section 2. 2.1.	Verification Test Description 1 Selection of Filtration Sample for Testing 2
Section 3.	Description of Filter Fabric
Section 4. 4.1. 4.2. 4.3.	Verification of Performance3Quality Assurance3Results3Limitations and Applications4
Section 5.	References
Appendix A.	Description of the Test Rig and the Methodology A-1
Appendix B.	Data on Certificates of Calibration
Appendix C.	Verification Testing Sheets
Appendix D.	Fabric Manufacturer's Submittal Letter D-1

List of Figures

	<u>Page</u>
Figure 1.	Photograph of the BHA Group's QP131 filter fabriciii
Figure A-1	. Diagram of FEMA test apparatus
Figure C-1	. Change in Pural NF dust scale reading with time during performance period $2V02-R1$. C-8
Figure C-2	Residual pressure drop across filter fabric during performance period 2V02-R1
Figure C-3	. Change in Pural NF dust scale reading with time during performance period 2V02-R2 C-13
Figure C-4	Residual pressure drop across filter fabric during performance period 2V02-R2 C-14
Figure C-5	. Change in Pural NF dust scale reading with time during performance period 2V02-R3 C-18
Figure C-6	. Residual pressure drop across filter fabric during performance period 2V02-R3 C-19
	List of Tables
Table 1.	Test Conditions for Baghouse Filtration Product Brand/Model: BHA Group Fabric QP131
Table 2.	Baghouse Filtration Product Three-run Average Test Results for BHA Group Fabric QP131 iv
Table 3.	Summary of Verification Results for BHA Group Fabric QP131
Table A-1.	Summary of Control Test Results
Table B-1.	Status of Instrument Calibrations for Baghouse Filtration Products Verification Tests

List of Abbreviations and Acronyms

APCT Air Pollution Control Technology

APPCD Air Pollution Prevention and Control Division

BFP baghouse filtration product

cfm cubic feet per minute

cm centimeters

cm w.g. centimeters of water gauge

dia. diameter

DP pressure drop

dscmh dry standard cubic meters per hour

EPA U.S. Environmental Protection Agency

ETS ETS, Inc.

ETV Environmental Technology Verification

FEMA Filtration Efficiency Media Analyzer

fpm feet per minute

ft³ cubic feet

g grams

G/C gas-to-cloth ratio (filtration velocity)

gr grains

gr/dscf grains per dry standard cubic foot g/dscm grams per dry standard cubic meter

g/h grams per hour

g/m² grams per square meter

h hoursin. inches

in. w.g. inches of water gauge

kPa kilopascals

m metersmbar millibarsmin minutes

m/h meters per hour

m³/h cubic meters per hour

mm millimeters
MPa megapascals
ms milliseconds
NA not applicable

Pa pascals

PM particulate matter

PM_{2.5} particulate matter 2.5 micrometers in aerodynamic diameter or smaller

psi pounds per square inch

psia pounds per square inch absolute

PTFE polytetrafluoroethylene

QA quality assurance
QC quality control

RTI Research Triangle Institute

s seconds

scf standard cubic feet

scfm standard cubic feet per minute
VDI Verein Deutscher Ingenieure

μg micrograms
 μm micrometers
 °C degrees Celsius
 °F degrees Fahrenheit

°R degrees Rankine

Acknowledgments

ETS acknowledges the support of all those who helped plan and conduct the verification activities. In particular, we would like to thank Ted Brna, EPA's Project Manager, and Paul Groff, EPA's Quality Assurance Manager, both of EPA's National Risk Management Research Laboratory in Research Triangle Park, NC. Finally, we would like to acknowledge the assistance and participation of Alan Smithies of BHA Group.

For more information on Baghouse Filtration Products Verification Testing, contact:

John Mycock ETS, Inc. 1401 Municipal Road NW Roanoke, VA 24012 (540) 265-0004 jcm@etsi-inc.com

For more information on the BHA Group's QP131 baghouse fabric, contact:

Marc Moreano BHA Group 8800 East 63rd Street Kansas City, MO 64133 (816) 356-8400 mmoreano@bhagroup.com

Andy Winston BHA Group 8800 East 63rd Street Kansas City, MO 64133 (816) 356-8400 awinston@bhagroup.com

SECTION 1 INTRODUCTION

The U.S. Environmental Protection Agency (EPA) has created the Environmental Technology Verification (ETV) Program to facilitate the deployment of innovative or improved technologies through performance verification and information dissemination. The ETV Program is intended to assist and inform those involved in the design, distribution, permitting, and purchase of environmental technologies.

EPA's partner in the Air Pollution Control Technology (APCT) Verification Center is RTI. With the full participation of the technology developer, the APCT Verification Center develops plans, conducts tests, collects and analyzes data, and reports findings. The evaluations are conducted according to a rigorous protocol and under quality assurance (QA) and quality control (QC) oversight. The APCT Verification Center verifies the performance of commercial-ready technologies used to control air pollutant emissions, with an emphasis on technologies for controlling particulate matter, volatile organic compounds, nitrogen oxides, and hazardous air pollutants. The program develops standardized verification protocols and test plans, conducts independent testing of technologies, and prepares verification test reports and statements for broad dissemination.

SECTION 2

VERIFICATION TEST DESCRIPTION

The baghouse filtration products were tested in accordance with the APCT "Generic Verification Protocol for Baghouse Filtration Products" and the "Test/QA plan for the Verification Testing of Baghouse Filtration Products." This protocol incorporated all requirements for quality management, quality assurance, procedures for product selection, auditing of the test laboratories, and reporting format. The Generic Verification Protocol describes the overall procedures to be used for verification testing and defines the data quality objectives. The values for inlet dust concentration, raw gas flow rate, and filtration velocity used for current verification testing have been revised since posting of the Generic Verification Protocol. The protocol is being revised to include these and other changes under recommendation or concurrence of the Baghouse Filtration Products Technical Panel. The test/QA plan details how the test laboratory at ETS, Inc. (ETS) will implement and meet the requirements of the Generic Verification Protocol.

Mean outlet particle concentration was determined from the Filtration Efficiency Media Analyzer (FEMA) test apparatus. The test apparatus consists of a brush-type dust feeder that disperses test dust into a vertical rectangular duct (raw-gas channel). A radioactive polonium-210 alpha source is used to neutralize the dust electrically before its entry into the raw-gas channel. A portion of the gas flow is extracted from the raw-gas channel through the test filter, which is mounted vertically at the entrance to a horizontal duct (clean-gas channel). The clean-gas flow is separated using an aerodynamic "Y" so that a representative sample of the clean gas flows through an Andersen impactor that determines the outlet particle concentration.

The particle size was measured while a fine dust was injected into the air stream upstream of the filter fabric sample.

The following series of tests was performed on three separate, randomly selected filter fabric samples:

- Dust characterization (first sample fabric verification test only),
- Conditioning period,
- Recovery period, and
- Performance test period.

To simulate long-term operation, the test filter was first subjected to a conditioning period, which consists of 10,000 rapid pulse cleaning cycles under continuous dust loading. During this period, the time between cleaning pulses is maintained at 3 seconds. No filter performance parameters are measured in this period.

The conditioning period is immediately followed by a recovery period, which allows the test filter fabric to recover from rapid pulsing. The recovery period consists of 30 normal filtration cycles under continuous and constant dust loading. During a normal filtration cycle, the dust cake is allowed to form on the test filter until a differential pressure of 1,000 Pa (4.0 in. w.g.) is reached. At this point the test filter is cleaned by a pulse of compressed air from the clean-gas side of the fabric. The next filtration cycle begins immediately after the cleaning is complete.

Performance testing occurs for a 6-hour period immediately following the recovery period (a cumulative total of 10,030 filtration cycles after the test filter has been installed in the test apparatus). During the performance test period, normal filtration cycles are maintained and, as in the case of the conditioning and recovery periods, the test filter is subjected to continuous and constant dust loading.

The filtration velocity (glass-to-cloth ratio [G/C]) and inlet dust concentrations are maintained at 180 ± 9 m/h (9.8 ± 0.5 fpm) and 18.4 ± 3.6 g/dscm (8.0 ± 1.6 gr/dscf), respectively, throughout all phases of the test.

Additional details on the test procedure are provided in Appendix A.

2.1 SELECTION OF FILTRATION SAMPLE FOR TESTING

Filter fabric samples of QP131 were supplied to ETS directly from the manufacturer (BHA Group) with a letter signed by Alan Smithies, Director of Product Development, BHA Group, attesting that the filter media were selected at random in an unbiased manner from commercial-grade media and were not treated in any manner different from the media provided to customers. The manufacturer supplied the test laboratory with nine 46 x 91 cm (18 x 36 in.) filter samples. The test laboratory randomly selected three samples and prepared them for testing by cutting one test specimen of 150 mm (5.9 in.) diameter from each selected sample for insertion in the test rig sample holder. The sample holder has an opening of 140 mm (5.5 in.) in diameter, which is the dimension used to calculate the face area of the tested specimen.

SECTION 3 DESCRIPTION OF FILTER FABRIC

The BHA Group QP131 filter fabric is a polyester needlefelt substrate with an expanded, microporous polytetrafluoroethylene (PTFE) membrane, thermally laminated to the filtration/dust-cake surface. This product is traditionally used to capture fine particulate in ambient and hot gas filtration applications.

SECTION 4

VERIFICATION OF PERFORMANCE

4.1 QUALITY ASSURANCE

The verification tests were conducted in accordance with an approved test/QA plan.² The EPA Quality Assurance Manager conducted an independent assessment of the test laboratory in February 2000 and found that the test laboratory was equipped and being operated as specified in the test/QA plan.

The ETS QA Officer and APCT QA staff have reviewed the results of this test and have found that the results meet data quality objectives in the test/QA plan. In addition, it should be noted that, because of the highly efficient nature of the filter medium being tested, one or more of the impactor substrate weighings for these results were near the reproducibility of the balance. As a result of this occurrence, the tests do not meet the data quality objectives stated in the test/QA plan for mass gain associated with outlet concentrations. The true values of the outlet concentrations may be more than plus or minus 15 percent of the reported values. Data on calibration certificates for the flow meters, flow transducers, weights, lowand high-resolution balances, thermometer, and humidity logger are provided in Appendix B.

4.2 RESULTS

Table 3 summarizes the mean outlet particle concentration measurements for the verification test periods. Measurements were conducted during the 6-hour performance test period. The performance test period followed a 10,000-cycle conditioning period and a 30-cycle recovery period. Upstream and downstream particle concentration information for each verification test period is provided in Appendix C.

The average residual pressure drop across each filter sample at the nominal 180 m/h (9.8 fpm) filtration velocity (for a flowrate of 5.8 m³/h [3.4 cfm]) is also shown in Table 3. This DP ranged from 6.13 to 6.31 cm w.g. (2.41 to 2.48 in. w.g.) for the three filter samples tested. The residual DP increase ranged from 0.43 to 0.45 cm w.g. (0.17 to 0.18 in. w.g.) for the samples tested. All three verification runs were used to compute the averages given in Table 3. The $PM_{2.5}$ concentration average for the three runs is 0.0000068 g/dscm. The total PM concentration average for the three runs is 0.0000388 g/dscm.

Table 3. Summary of Verification Results for BHA Group QP131

Test Run Number	2V02-R1	2V02-R2	2V02-R3	Average*
PM _{2.5} (g/dscm)**	0.0000127	0.0000078	0.0000000	0.0000068
Total PM (g/dscm)	0.0000540	0.0000327	0.0000296	0.0000388
Average Residual DP (cm w.g.)	6.13	6.19	6.31	6.21
Initial Residual DP (cm w.g.)	5.87	5.93	6.02	5.94
Residual DP Increase (cm w.g.)	0.44	0.43	0.45	0.44
Mass Gain of Sample Filter (g)	0.14	0.14	0.12	0.13
Average Filtration Cycle Time (s)	74	76	72	74

^{*}All three verification runs were used to compute averages.

4.3 LIMITATIONS AND APPLICATIONS

This verification report addresses two aspects of baghouse filtration product performance: outlet particle concentration and pressure drop. Users may wish to consider other performance parameters such as service life and cost when selecting a baghouse filtration fabric for their application.

In accordance with the generic verification protocol, this verification statement is applicable to the baghouse filtration product manufactured between September 28, 2001 and 3 years thereafter.

SECTION 5 REFERENCES

- 1. Generic Verification Protocol for Baghouse Filtration Products, RTI, Research Triangle Park, NC, February 2000. Available at http://etv.rti.org/apct/pdf/baghouseprotocol.pdf.
- 2. Test/QA Plan for the Verification Testing of Baghouse Filtration Products, ETS, Inc., Roanoke, VA, February 1999.

^{**} Standard conditions: 101.3 kPa (14.7 psia) and 20°C (68°F). One or more of the impactor substrate weight changes for these results were near the reproducibility of the balance.

	BHA	Group	OP1	13
--	-----	-------	-----	----

Appendix A

DESCRIPTION ON THE TEST RIG AND THE METHODOLOGY

DESCRIPTION OF THE TEST RIG AND METHODOLOGY

TEST APPARATUS

The tests were conducted in ETS's FEMA test apparatus (Figure A-1). The test apparatus consists of a brush-type dust feeder that disperses test dust into a vertical rectangular duct (raw-gas channel). The dust feed rate is continuously measured and recorded via an electronic scale located beneath the dust feed mechanism. The scale has a continuous read-out with a resolution of 10 g. A radioactive polonium-210 alpha source is used to neutralize the dust electrically before its entry into the raw-gas channel. An optical photo sensor monitors the concentration of dust and ensures that the flow is stable for the entire duration of the test. The optical photo sensor does not measure concentration. A portion of the gas flow is extracted from the raw-gas channel through the test filter, which is mounted vertically at the entrance to a horizontal duct (clean-gas channel). The clean-gas channel flow is separated in two gas streams, a sample stream and a bypass stream. An aerodynamic "Y" is used for this purpose. The aerodynamic "Y" is designed for isokinetic separation of the clean gas with 40 percent of the clean gas entering the sample-gas channel without change in gas velocity. The sample-gas channel contains an Andersen impactor for particle separation and measurement. The bypass channel contains an absolute filter. The flow within the two segments of the "Y" is continuously monitored and maintained at selected rates by adjustable valves. Two vacuum pumps maintain air flow through the raw-gas and clean-gas channels. The flow rates, and thus the G/C through the test filter, are kept constant and measured using mass flow controllers. A pressure transducer is used to measure the average residual pressure drop of the filter sample. The pressure transducer measures the differential pressure across the filter samples 3 seconds after the cleaning pulse. The pressure drop measurements are averaged as stated in Appendix C, section 4.4.1. High-efficiency filters are installed upstream of the flow controllers and pumps to prevent contamination or damage caused by the dust. The cleaning system consists of a compressed-air tank set at 0.5 MPa (75 psi), a quick-action diaphragm valve, and a blow tube (25.4 mm [1.0 in.] dia.) with a nozzle (3 mm [0.12 in.] dia.) facing the downstream side of the test filter.

CONTROL TESTS

Two types of control tests were performed during the verification test series. The first was a dust characterization, which was performed at the beginning of the first verification test. The reference dust that was used during the verification tests was Pural NF aluminum oxide dust. The Pural NF dust was oven dried for 2 hours and sealed in an airtight container prior to its insertion into the FEMA apparatus. The dust characterization results had to meet the requirements of a $1.5 \,\mu m$ maximum mass mean diameter and at least 66 percent less than $2.5 \,\mu m$ to continue the verification test series.

The second control test, the reference value test, is performed quarterly using the reference fabric and the FEMA apparatus. The reference value test determines the weight gain of the reference fabric as well as the maximum pressure drop. The results of the test verify that the FEMA apparatus is operating within the required parameters. The reference value test measurements must meet the following requirements of weight gain of reference fabric equal to 0.93 ± 0.09 g and a reference fabric maximum pressure drop of 1.84 ± 0.18 cm w.g. to proceed with verification testing.

The results of the control tests are summarized in Table A-1.

Table A-1. Summary of Control Test Results

	Requirement	Measured Value	Met Requirements?
Mass Mean Diameter, µm	< 1.5	1.08	Yes
% Less than 2.5 μm	> 66	74.73	Yes
Weight Gain, g	0.93 ± 0.09	1.02	Yes
Maximum Pressure Drop, cm w.g.	1.84 ± 0.18	1.90	Yes

ANALYSIS

The equations used for verification analysis are described below.

 A_f = Exposed area of sample filter, m^2

 $\begin{array}{lcl} C_{ds} & = & Dry \ standard \ outlet \ particulate \ concentration \ of \ total \ mass, \ g/dscm \\ C_{2.5ds} & = & Dry \ standard \ outlet \ particulate \ concentration \ of \ PM_{2.5}, \ g/dscm \end{array}$

d = Diameter of exposed area of sample filter, m

 F_a = Dust feed concentration corrected for actual conditions, g/m³ F_s = Dust feed concentration corrected for standard conditions, g/dscm

G/C = Gas-to-cloth ratio, m/h

M_t = Total mass gain from Andersen impactor, g

 $M_{2.5}$ = Total mass gain of particles equal to or less than 2.5 μ m diameter from Andersen impactor, g. This value may need to be linearly interpolated from test data.

N = Number of filtration cycles in a given performance test period

P_{avg} = Average residual pressure drop, cm w.g.

P_i = Residual pressure drop for ith filtration cycle, cm w.g.

P_s = Absolute gas pressure as measured in the raw gas channel, mbar

 Q_a = Actual gas flow rate, m^3/h

 Q_{ds} = Dry standard gas flow rate, dscmh

 $Q_{2.5ds}$ = Dry standard gas flow rate for 2.5 μ m particles, dscmh Q_{st} = Standard gas flow rate for a specific averaging time, t, dscmh

t = Specified averaging time or sampling time, s

t_c = Average filtration cycle time, s T_s = Raw gas channel temperature, °F

W_f = Weight of dust in feed hopper following specified time, g. Because of vibrations causing short-term fluctuations to the feed hopper, it is recommended that this value be measured as a 1-min average.

Wight of dust in feed hopper at the beginning of the specified time, g. Because of vibrations causing short-term fluctuations to the feed hopper, it is recommended that this value be measured as a 1-min average.

Conversion factors and standard values used in the equations are listed below.

460 = 0 °F. in °R

1013 = Standard atmospheric pressure, mbar

528 = Standard temperature, °R

Area of Sample Fabric -
$$A_f$$

 $A_f = (\pi * d^2)/4$

Actual Gas Flow Rate -
$$Q_a$$

$$Q_a = Q_{ds} * \left[\frac{(T_s + 460) * 1013}{P_s * 528} \right]$$

$$\begin{aligned} \text{Gas-to-Cloth Ratio - G/C} \\ \text{G/C} &= Q_{\text{a}} \: / \: A_{\text{f}} \end{aligned}$$

Standard Dust Feed Concentration - F_s , for a specified time – t $F_s = (w_i - w_f) / (Q_{st} * t)$

Actual Raw Gas Dust Concentration - Fa

$$F_a = F_s * \left[\frac{(T_s + 460) * 1013}{P_s * 528} \right]$$

Dry Standard Clean Gas Particulate Concentration, Total Mass – C_{ds} = M_t / [Q_{ds} * t * (1 - % $H_2O/100$)]

Dry Standard Clean Gas Particulate Concentration, PM-2.5 - $C_{2.5ds}$ $C_{2.5ds}$ = $M_{2.5}$ / [$Q_{2.5ds}$ * t * (1 - % $H_2O/100$)]

Filtration Cycle Time -
$$t_c$$

 $t_c = t/N$

Average Residual Pressure Drop - $\,P_{\text{avg}}\,$ $P_{\text{avg}}=\Sigma P_{\text{i}}/N$

REFERENCES

1. Test/QA Plan for the Verification Testing of Baghouse Filtration Products, ETS, Inc., Roanoke, VA, February 1999.


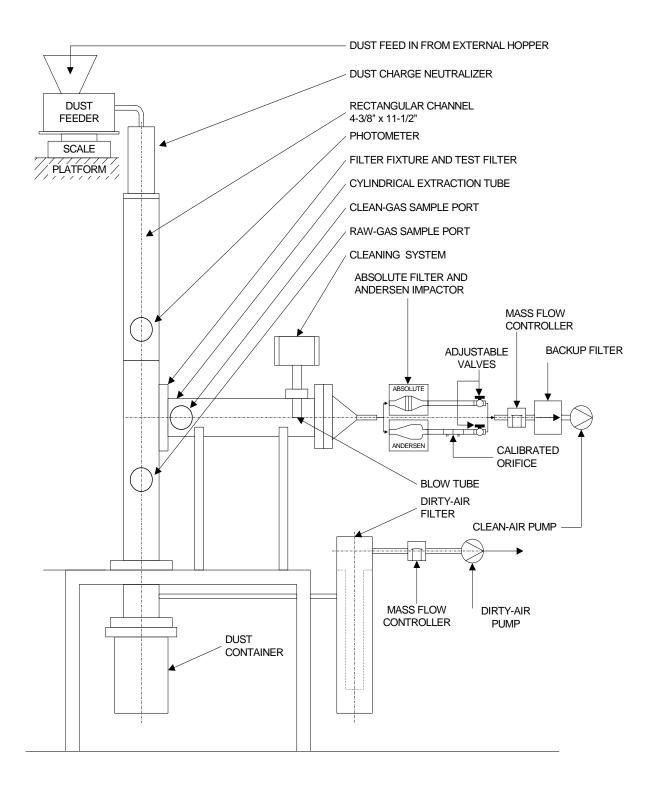


Figure A-1. Diagram of FEMA test apparatus



Appendix B

DATA ON CERTIFICATES OF CALIBRATION

B-2

BHA Group QP131

Instrument Measured Manufacturer Serial Certificate Date of Certificate **NIST** Current Certification No. **Expiration** Traceable **Parameter** and Model No. No. For **Date** Test? **High Resolution** Impactor Precisa 16157 914 11/29/2000 11/29/2001 YES YES **Balance** Substrate 262SMA-FR Weight Low Resolution Sample Filter Mettler 562968 913 11/29/2000 11/29/2001 YES YES Weight P 1210N Balance 2,000 g Weight Dust Feed Troemner 37672 11/29/2000 YES YES 152227B 11/29/2001 Weight Cell 2,000 g 100 g Weight Low Troemner 11/29/2000 YES 37670 152227 11/29/2001 YES 100 g Resolution Balance 1 g Weight High Troemner 45300 161484 11/29/2000 11/29/2001 YES YES Resolution 1 g Balance Troemner 1 mg Weight 37080 11/29/2000 11/29/2001 YES YES 151748 High Resolution 1 mg Balance LTG GmbH T-1 04/03/2001 YES YES Thermocouple **FEMA** Calibrated 01/03/2001 Against "K" Type Temperature Thermometer **VWR** Scientific 3C2082 992117 12/29/1999 NA YES YES Mercury Thermometer*

Table B-1. Status of Instrument Calibrations for Baghouse Filtration Products Verification Tests.

(continued)

B-:

BHA Group QP131

Table B-1. Status of Instrument Calibrations for Baghouse Filtration Products Verification Tests (continued).

Instrument	Measured Parameter	Manufacturer and Model No.	Serial No.	Certificate No.	Date of Certification	Certificate Expiration Date	NIST Traceable ?	Current For Test?
Relative Humidity	Lab Relative Humidity	ACR Systems, Inc. SR2	66884	19655	11/23/2000	11/23/2001	YES	YES
Pressure Transducer	ΔP Across Sample Filter	Hastings 223BD-00010AABS	000320459	STDNN SET #4B	12/23/2000	12/23/2001	YES	YES
	Barometric Pressure	Hastings 223BD-00010AABS	145265	STDNN SET #4B	12/23/2000	12/23/2001	YES	YES
Flow Meters	Clean Gas	Hastings HFC-203	123917	Calibrated Against Dry Gas Meter	01/05/2001	04/05/2001	YES	YES
	Raw Gas	Hastings HFC-203	119148	Calibrated Against Dry Gas Meter	01/05/2001	04/05/2001	YES	YES
	Sample Gas	Hastings 223BD-00010 AABS	000320459	Calibrated Against Dry Gas Meter	01/05/2001	04/05/2001	YES	YES
	Dry Gas Meter*	Rockwell S-275	009548	Letter of 07/10/2000	07/10/2000	08/10/2001	YES	YES
Charge Neutralizer	Not applicable	NRD, LLC Nuclecel P-2031	A2AP708	4638	12/06/2000	12/07/2001	YES	YES

^{*}This device is used locally to calibrate other instruments (for temperature or gas flow, as appropriate).

Note: Each of the certificates described in Table B-1 is on file at ETS, Inc.

Annendiy C	VERIFIC	CATION TESTING SHEETS
		Appendix C

VERIFICATION TESTING OF BAGHOUSE FILTRATION PRODUCTS SUMMARY OF RESULTS AT 9.8 FPM

RUN ID. FABRIC DESIGNATION MANUFACTURER DUST FEED	2V02-R1 QP131-1 BHA Group Pural NF	2V02-R2 QP131-3 BHA Group Pural NF	2V02-R3 QP131-5 BHA Group Pural NF	Average
QUICKCHECK	4.00			4.00
Mass Mean Diameter % Less than PM 2.5	1.08 74.73			1.08 74.73
CONDITIONING PERIOD				
Date Started	1/30/2001	1/31/2001	2/1/2001	
Time Started	13:38	15:26	15:04	
Time Ended	21:58	23:46	23:24	
Test Duration (min.)	500	500	500	500
RECOVERY PERIOD				
Date Started	1/31/2001	2/1/2001	2/2/2001	
Time Started	8:11	7:48	8:22	
Time Ended	8:51	8:28	9:03	
Test Duration (min.)	40	40	41	40
PERFORMANCE TEST PERIOD				
Date Started	1/31/2001	2/1/2001	2/2/2001	
Time Started	9:09	8:46	9:22	
Time Ended	15:09	14:46	15:22	
Test Duration (min.)	360	360	360	360
VERIFICATION TEST RESULTS				
Mean Outlet Particle Conc.	0.0000127	0.0000078	0.0000000	0.0000068
PM 2.5 (g/dscm)				
Mean Outlet Particle Conc.	0.0000540	0.0000327	0.0000296	0.0000388
Total mass (g/dscm) Initial Residual Pressure	5.87	5.93	6.02	5.94
	5.67	5.93	6.02	5.94
Drop (cm w.g.)	0.44	0.43	0.45	0.44
Change in Residual Pressure	0.44	0.43	0.45	0.44
Drop (cm w.g.) Average Residual Pressure	6.13	6.19	6.31	6.21
	0.13	0.19	0.31	0.21
Drop (cm w.g.) Mass Gain of Filter	0.14	0.14	0.12	0.13
Sample (g)	0.14	0.14	0.12	0.13
Average Filtration Cycle	74	76	72	74
Time (s)	74	70	12	74
1 IIIIE (2)				

RTI/ETV PRELIMINARY TESTING DUST CHARACTERIZATION - PURAL NF ANDERSEN IMPACTOR PARTICLE SIZING GRAVIMETRIC ANALYTICAL DATA AND RESULTS

RUN NUMBER: **2V02** TEST DATE: 01/30/2001

			Tare	Tare	Total	Total	Mass	Negative
Filter I.D.			Filter Mass	Beaker Mass	Tare Mass	Final Mass	Difference	Difference?
Sample I.D.	Wash Vol.(ml)	Stage	(g)	(g)	(g)	(g)	(g)	(g)
VDI-00-70	50	Acetone Wash	NA	0	0	0	0.00000	NA
VDI-00-70-1		1	1.09283	0	1.09283	1.09381	0.00098	NA
VDI-00-70-2		2	1.03796	0	1.03796	1.03839	0.00043	NA
VDI-00-70-3		3	1.03964	0	1.03964	1.04218	0.00254	NA
VDI-00-70-4		4	1.06727	0	1.06727	1.06867	0.00140	NA
VDI-00-70-5		5	0.95689	0	0.95689	0.96142	0.00453	NA
VDI-00-70-6		6	0.90271	0	0.90271	0.91171	0.00900	NA
VDI-00-70-7		7	1.22483	0	1.22483	1.23305	0.00822	NA
VDI-00-70-8		8	1.17258	0	1.17258	1.17723	0.00465	NA
VDI-00-70-F		9	1.24738	0	1.24738	1.25354	0.00616	NA


Total 0.03791

IMPACTOR PARTICLE SIZING RESULTS

Impactor Flow Rate: 0.172 cfm Isokinetics: 98.84 % Viscosity of Gas: 0.000163 poise

	Particulate	Cumulative	
	Mass	% Less Than	D50 Cut Point
STAGE	(g)	Diameter	(micrometers)*
1	0.00098	97.41	10.68
2	0.00043	96.28	10.07
3	0.00254	89.58	6.29
4	0.00140	85.89	4.21
5	0.00453	73.94	2.38
6	0.00900	50.20	1.09
7	0.00822	28.51	0.67
8	0.00465	16.25	0.38
9	0.00616		

^{*} Calculated as an aerodynamic diameter using a particle density of 2.65 g/ml.

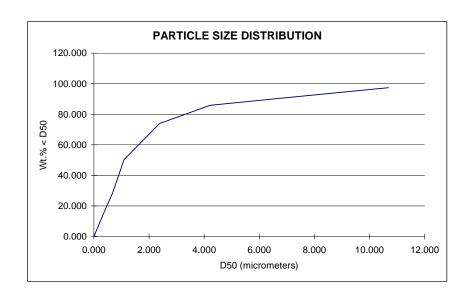

Mass Mean Diameter, micrometers 1.08 % Less Than PM 2.5 74.73

Dust Characterization

FOR TEST SERIES	2V02		
DUST TYPE	Pural NF		
DATE	01/30/2001	DATA (FOR RAW GAS CHANNEL)	
START TIME	11:14	Actual Flow	5.83 m ³ /hr
END TIME	11:19		3.43 cfm
STACK LENGTH	111 mm	Std. Flow	5.47 scm/hr
STACK WIDTH	291 mm		3.22 scfm
STACK AREA	0.0323 m^2	Raw Gas Pressure	964.33 mbar
NOZZLE I.D.	1.797 in.	Sample Gas Temperature	24.6 ° C
	0.046 m		76.3 ° F
METER BOX GAMMA	0.9813		
BAROMETRIC PRESSURE	28.50 in. Hg		
TEST DURATION	5 min.		
METER VACUUM	2.0 in. Hg		

INTERMEDIATE RESULTS	METHOD 3 DATA

Metered Volume	0.874 ft ³	%O2	20.9	Md	28.84	
Volume @ Std.Cond.	0.805 scf	%CO2	0.0	Ms	28.73	
Volume at Raw Gas Conditions	0.860 scf	%CO	0.0	Ps	28.47	in. Ha
Water	0.95 %	%N2	79.1			3
Isokinetics	98.8 %	O2+CO2	20.9			

	STACK			METER	METER TEMPERAT	<u> TURE</u>
	TEMP	DP	DH	VOLUME	INLET	OUTLET
<u>POINT</u>	<u>(° F)</u>	<u>(in. w.g.)</u>	<u>(in. w.g.)</u>	(liters)	<u>(° F)</u>	<u>(° F)</u>
1	76.3	1E-05	6.125	3118.94	75	75
				3143.68	75	76
			Volume Chang	e: 24.74	75	
					(Avg. of 4 temp	s.)

Md - Dry Molecular Weight

Ms - Molecular Weight in Stack

Ps - Static Pressure

DH - Orifice Pressure Drop

DP - Pressure Drop

Note: All measurements are primary measurements and might be converted in subsequent calculations.

CONDITIONING TEST PERIOD

RUN ID.	2V02-R1	NUMBER OF PULSES	10000
FABRIC DESIGNATION	QP131-1	PULSE INTERVAL	3 s
MANUFACTURER	BHA Group		
DUST FEED	Pural NF	Moisture	1.02 %WV
DATE STARTED	1/30/2001		
TIME STARTED	13:38		
TIME ENDED	21:58		
TEST DURATION	500 min.		

QA/QC DATA

Test Duration			D	ust Feed (g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Ti	me	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	13:38	14:38	1765.4	1663.2	102.2	2.78	2.65	5.43	25.0	961.52	19.0	184.5
61-120	14:39	15:38	1663.2	1553.2	110.0	2.78	2.65	5.43	25.3	961.40	20.5	184.8
121-180	15:39	16:38	1553.2	1445.4	107.8	2.78	2.65	5.43	25.4	961.14	20.1	184.9
181-240	16:39	17:38	1445.4	1339.6	105.8	2.78	2.64	5.42	25.3	961.44	19.7	184.0
241-300	17:39	18:38	1339.6	1235.6	104.0	2.78	2.64	5.42	24.9	961.84	19.4	183.7
301-360	18:39	19:38	1235.6	1131.2	104.4	2.78	2.64	5.42	24.6	962.04	19.5	183.5
361-420	19:39	20:38	1131.2	1029.4	101.8	2.78	2.64	5.42	24.5	962.34	19.0	183.4
421-480	20:39	21:38	1029.4	928.5	100.9	2.78	2.64	5.42	24.3	962.38	18.8	183.2
441-500 *	20:59	21:58	993.9	896.8	97.1	2.78	2.64	5.42	24.2	962.41	18.1	183.2
AVERAGE FOR	R 500 MINU	TE RAW D	ATA		104.2	2.78	2.64	5.42	24.9	961.79	19.4	184.0
ACCEPTANCE					100				25		18.4	180
					+/- 20				+/- 2		+/- 3.6	+/- 9.0

^{*} Test duration is a rolling 60 minute average. The last 60 minute frame was determined by counting 60 minutes back from the last minute of the test.

DATA PROCESSING OPERATOR:

C-(

VERIFICATION TESTING OF BAGHOUSE FILTRATION PRODUCTS DETAILED SUMMARY OF DATA AND RESULTS

RECOVERY PERIOD

RUN ID.	2V02-R1	NUMBER OF PULSES	30
FABRIC DESIGNATION	QP131-1	AVG. PULSE INTERVAL	80 s
MANUFACTURER	BHA Group	AVG . RESIDUAL DP	590.07 Pa
DUST FEED	Pural NF	MAX. PRESSURE DROP	1000 Pa
DATE STARTED	1/31/2001		
TIME STARTED	8:11 *	Moisture	1.04 % WV
TIME ENDED	8:51		
TEST DURATION	40 min.		

QA/QC DATA

Test Duration				Dı	ust Feed (g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)		Time	Э	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/hr)
1-40	8:12	*	8:51	890.6	832.8	57.8	2.81	2.67	5.48	23.6	965.06	10.7	184.2

^{*} First minute is not considered in calculations due to equipment stabilization.

DATA PROCESSING OPERATOR:	
	Sharon M. Winemiller - ETS, Inc.

PERFORMANCE TEST PERIOD

RUN ID. FABRIC DES MANUFACTI DUST FEED DATE STAR TIME START TIME ENDEL TEST DURA	URER TED TED	2V02-R1 QP131-1 BHA Grou Pural NF 1/31/2001 9:09 15:09	 				NUMBER AVG. PUI AVG. REI INITIAL R CHANGE MAX. PR	LSE INTE SIDUAL I RESIDUA I IN DP	ERVAL DP L DP	600.69 575.4 42.7 1000	4 s 5 Pa 4 Pa 7 Pa		
QA/QC DATA	4												
Test Duration				ust Feed (•		erage Gas					Dust Conc.	
(min.)		ime	Initial	Final	Total	Raw	Clean	Total	Sample	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	9:09	10:09	1640.2	1543.2	97.0	2.79	2.66	5.45	1.06	24.06	966.28	18.0	183.7
61-120	10:10	11:09	1543.2	1435.5	107.7	2.80	2.66	5.46	1.06	24.39	966.71	19.9	183.9
121-180	11:10	12:09	1435.5	1326.3	109.2	2.80	2.66	5.46	1.07	24.67	966.93	20.2	184.0
181-240	12:10	13:09	1326.3	1223.2	103.1	2.80	2.66	5.46	1.07	25.07	967.10	19.1	184.2
241-300	13:10	14:09	1223.2	1118.5	104.7	2.80	2.66	5.46	1.07	25.34	967.06	19.4	184.4
301-360 AVERAGE F	14:10	15:09	1118.5	1011.3	107.2	2.80	2.66	5.46	1.07 1.06	25.57	967.45	19.8	184.5
AVERAGE	OR 360 MIIN	UIE RAW L	DATA		104.8	2.80	2.66	5.46	1.06	24.85	966.92	19.4	184.0
ACCEPTANO	CE				100 +/- 20					25 +/- 2		18.4 +/- 3.6	180 +/- 9.0
GRAVIMETR	RIC DATA										_		
IMPACTOR S	SUBSTRATE	S				SAMPLE	FILTER						
Backup Filter			0.00008	g		Tare Ma			11.41	g			
Total Mass G	. ,		0.00034	g		Final Ma	SS		11.55				
						Mass Ga	ain		0.14	-	_		
OUTLET CO	NCENTRATI	ON								_			
Total Volume	•					6.83					DATA PRO	OCESSING (OPERATOR:
Mean Outlet	Particle Cond	centration - F	PM 2.5			.0000117	•						
Mean Outlet	Particle Cond	centration - 1	Total Mass		0	.0000498	g/m³						

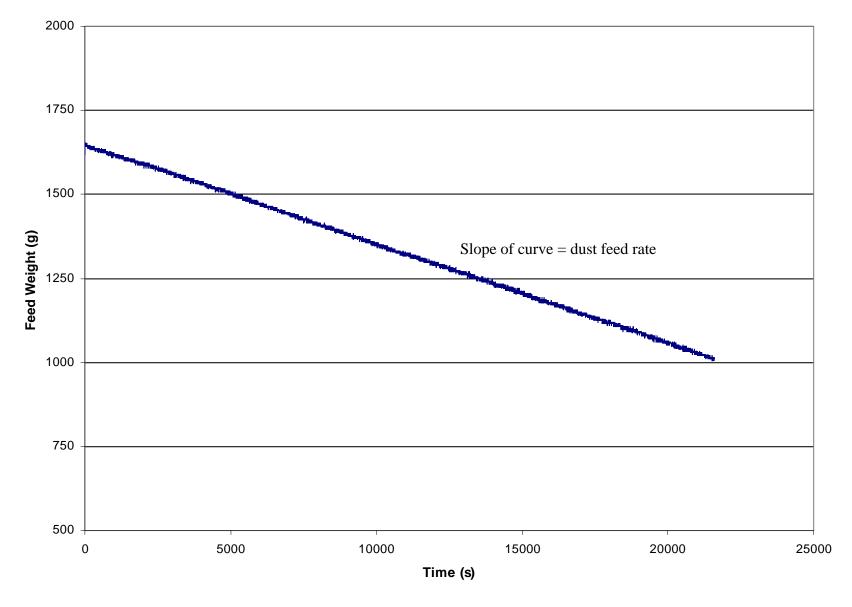


Figure C-1. Change in Pural NF dust scale reading with time during performance period 2V02-R1

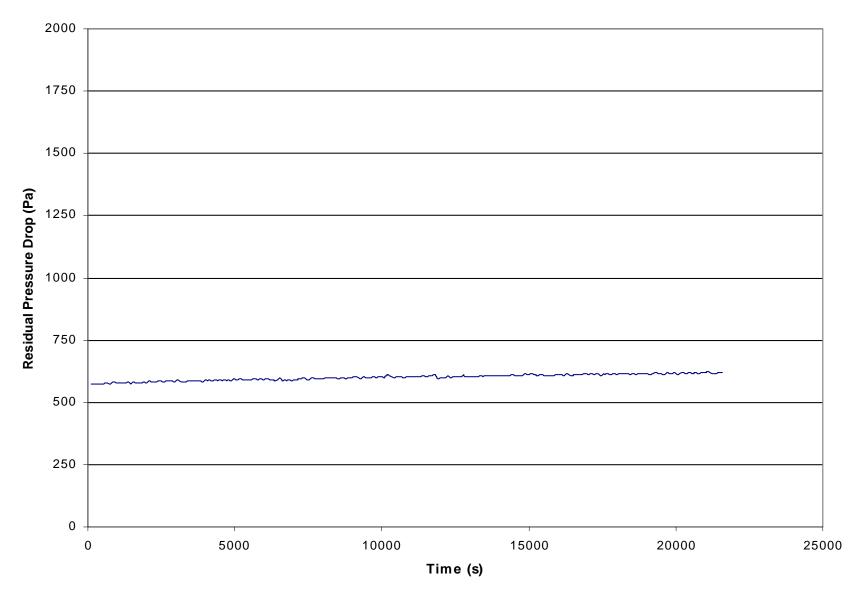


Figure C-2. Residual pressure drop across filter fabric during performance period 2V02-R1

CONDITIONING TEST PERIOD

RUN ID. 2V02-R2 NUMBER OF PULSES 10000
FABRIC DESIGNATION QP131-3 PULSE INTERVAL 3 s
MANUFACTURER BHA Group
DUST FEED Pural NF Moisture 1.09 %WV

DATE STARTED 1/31/2001
TIME STARTED 15:26
TIME ENDED 23:46
TEST DURATION 500 min.

QA/QC DATA

Test Duration			D	ust Feed (g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Ti	me	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	15:26	16:26	1747.0	1656.8	90.2	2.79	2.66	5.45	25.3	968.03	16.7	184.2
61-120	16:27	17:26	1656.8	1551.7	105.1	2.80	2.66	5.46	25.1	968.81	19.5	183.9
121-180	17:27	18:26	1551.7	1445.5	106.2	2.80	2.66	5.46	24.9	969.88	19.7	183.6
181-240	18:27	19:26	1445.5	1339.0	106.5	2.80	2.66	5.46	24.5	970.75	19.7	183.2
241-300	19:27	20:26	1339.0	1238.4	100.6	2.80	2.66	5.46	24.3	971.29	18.6	182.9
301-360	20:27	21:26	1238.4	1137.0	101.4	2.80	2.66	5.46	24.0	971.38	18.8	182.8
361-420	21:27	22:26	1137.0	1036.0	101.0	2.80	2.65	5.45	23.9	971.74	18.7	181.9
421-480	22:27	23:26	1036.0	939.0	97.0	2.80	2.65	5.45	23.7	971.98	18.0	181.8
441-500 *	22:47	23:46	1001.2	905.5	95.7	2.80	2.65	5.45	23.7	972.18	17.8	181.7
AVERAGE FOR	R 500 MINU	ITE RAW D	ATA		101.0	2.80	2.66	5.45	24.4	970.56	18.7	182.9
												_
ACCEPTANCE					100				25		18.4	180
					+/- 20				+/- 2		+/- 3.6	+/- 9.0

^{*} Test duration is a rolling 60 minute average. The last 60 minute frame was determined by counting 60 minutes back from the last minute of the test.

DATA PROCESSING OPERATOR:

RECOVERY PERIOD

2V02-R2	NUMBER OF PULSES	30
QP131-3	AVG. PULSE INTERVAL	81 s
BHA Group	AVG . RESIDUAL DP	600.47 Pa
Pural NF	MAX. PRESSURE DROP	1000 Pa
2/1/2001		
7:48 *	Moisture	0.85 % WV
8:28		
40 min.		
	QP131-3 BHA Group Pural NF 2/1/2001 7:48 * 8:28	QP131-3 BHA Group Pural NF 2/1/2001 7:48 * 8:28 AVG. PULSE INTERVAL AVG. RESIDUAL DP MAX. PRESSURE DROP MAX. PRESSURE DROP

QA/QC DATA

Test Duration				Dı	ust Feed (g)	Average	Gas Flow	(sm³/hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)		Time)	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/hr)
1-40	7:49	*	8:28	905.0	847.3	57.7	2.85	2.71	5.56	23.2	978.67	10.5	184.3

^{*} First minute is not considered in calculations due to equipment stabilization.

DATA PROCESSING OPERATOR:

PERFORMANCE TEST PERIOD

RUN ID. FABRIC DES MANUFACTU DUST FEED DATE START TIME START TIME ENDED TEST DURAT	JRER ED ED	2V02-R2 QP131-3 BHA Grou Pural NF 2/1/2001 8:46 14:46 360					NUMBER AVG. PU AVG. RE INITIAL F CHANGE MAX. PR Moisture	LSE INTE SIDUAL E RESIDUAI E IN DP	RVAL DP L DP	606.37 580.9 41.9 1000	3 s 7 Pa 9 Pa 9 Pa		
QA/QC DATA									3				
Test Duration				ust Feed (erage Gas			-	_	Dust Conc.	
(min.)		me 0:40	Initial	Final	Total	Raw	Clean	Total	Sample	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	8:46	9:46	1658.9 1570.6	1570.6	88.3 100.8	2.84	2.71	5.55	1.08	23.67	979.71	16.0	184.4
61-120 121-180	9:47 10:47	10:46 11:46	1469.8	1469.8 1367.5	100.8	2.85 2.85	2.71 2.71	5.56 5.56	1.08 1.08	24.17 24.60	980.10 980.21	18.3 18.6	184.6 184.9
181-240	10.47	11.46 12:46	1367.5	1263.0	102.5	2.83	2.71	5.55	1.08	24.60	979.79	19.0	185.2
241-300	12:47	13:46	1263.0	1156.0	104.5	2.84	2.71	5.55	1.08	25.18	978.85	19.4	185.5
301-360	13:47	14:46	1156.0	1051.6	107.0	2.84	2.71	5.55	1.08	25.38	978.23	19.4	185.7
	OR 360 MINU			1001.0	101.2	2.84	2.71	5.56	1.08	24.66	979.48	18.4	185.3
ACCEPTANC	CE				100 +/- 20					25 +/- 2		18.4 +/- 3.6	180 +/- 9.0
RAVIMETR	IC DATA										_		
MPACTOR S Backup Filter Total Mass G	(PM 2.5)	S	0.00005 0.00021	•		SAMPLE Tare Ma Final Ma Mass Ga	SS		11.74 11.88 0.14	g	_		
OUTLET COI	NCENTRATI	ON									_		
Total Volume Sampled Mean Outlet Particle Concentration - PM 2.5 Mean Outlet Particle Concentration - Total Mass				6.87 m ³ 0.0000073 g/m ³ 0.0000306 g/m ³				_	DATA PRO	OCESSING (OPERATOR:		

Figure C-3. Change in Pural NF dust scale reading with time during performance period 2V02-R2

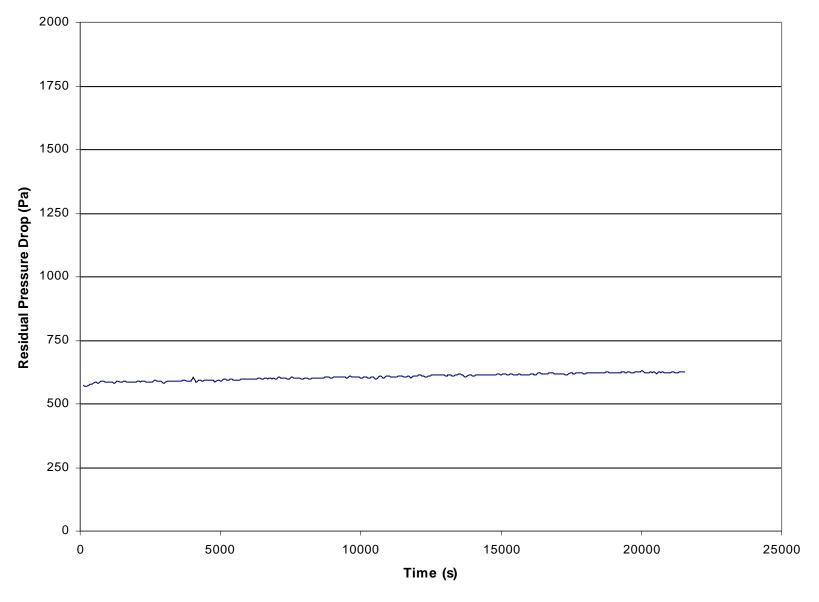


Figure C-4. Residual pressure drop across filter fabric during performance period 2V02-R2

CONDITIONING TEST PERIOD

RUN ID.	2V02-R3	NUMBER OF PULSES	10000
FABRIC DESIGNATION	QP131-5	PULSE INTERVAL	3 s
MANUFACTURER	BHA Group		
DUST FEED	Pural NF	Moisture	1.12 %WV
DATE STARTED	2/1/2001		
TIME STARTED	15:04		
TIME ENDED	23:24		
TEST DURATION	500 min.		

QA/QC DATA

Test Duration			D	ust Feed (g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Ti	me	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	15:04	16:04	1670.0	1579.5	90.5	2.81	2.67	5.48	25.3	978.88	16.7	182.8
61-120	16:05	17:04	1579.5	1477.4	102.1	2.81	2.68	5.49	25.2	979.47	18.8	183.3
121-180	17:05	18:04	1477.4	1372.7	104.7	2.81	2.68	5.49	24.9	979.95	19.3	183.0
181-240	18:05	19:04	1372.7	1268.3	104.4	2.81	2.68	5.49	24.5	980.08	19.2	182.8
241-300	19:05	20:04	1268.3	1167.7	100.6	2.81	2.68	5.49	24.1	980.04	18.5	182.6
301-360	20:05	21:04	1167.7	1065.0	102.7	2.81	2.68	5.49	23.9	979.94	18.9	182.4
361-420	21:05	22:04	1065.0	968.6	96.4	2.81	2.68	5.49	23.7	980.06	17.8	182.3
421-480	22:05	23:04	968.6	872.7	95.9	2.81	2.68	5.49	23.5	979.85	17.7	182.2
441-500 *	22:25	23:24	935.0	841.6	93.4	2.81	2.68	5.49	23.5	979.64	17.2	182.2
AVERAGE FOR	R 500 MINU	TE RAW D	ATA		99.4	2.81	2.68	5.49	24.3	979.76	18.3	182.7
ACCEPTANCE					100				25		18.4	180
					+/- 20				+/- 2		+/- 3.6	+/- 9.0

^{*} Test duration is a rolling 60 minute average. The last 60 minute frame was determined by counting 60 minutes back from the last minute of the test.

DATA PROCESSING OPERATOR:	
	Sharon M. Winemiller - ETS, Inc.

RECOVERY PERIOD

RUN ID.	2V02-R3	NUMBER OF PULSES	30
FABRIC DESIGNATION	QP131-5	AVG. PULSE INTERVAL	83 s
MANUFACTURER	BHA Group	AVG . RESIDUAL DP	596.47 Pa
DUST FEED	Pural NF	MAX. PRESSURE DROP	1000 Pa
DATE STARTED	2/2/2001		
TIME STARTED	8:22 *	Moisture	0.81 % WV
TIME ENDED	9:03		
TEST DURATION	41 min.		

QA/QC DATA

Test Duration				Di	ust Feed (g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)		Time)	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/hr)
1-41	8:23	*	9:03	839.6	783.2	56.4	2.84	2.71	5.55	22.9	975.73	10.3	184.4

^{*} First minute is not considered in calculations due to equipment stabilization.

DATA PROCESSING OPERATOR:

PERFORMANCE TEST PERIOD

RUN ID. FABRIC DES MANUFACTU DUST FEED DATE START TIME START TIME ENDED TEST DURAT	IRER ED ED	2V02-R3 QP131-5 BHA Grou Pural NF 2/2/2001 9:22 15:22 360					NUMBER AVG. PU AVG. RE- INITIAL F CHANGE MAX. PR Moisture	LSE INTE SIDUAL I RESIDUA E IN DP	ERVAL DP L DP	617.72 590.1 43.6 1000	2 s 2 Pa 1 Pa 3 Pa		
QA/QC DATA				. =	,				3,, ,			<u> </u>	0/0.5. //
Test Duration				ust Feed (•		erage Gas					Dust Conc.	
(min.)		me	Initial	Final	Total	Raw	Clean	Total	Sample	(° C)	(mbar)	(g/dscm)	(m/h)
0-60 61-120	9:22 10:23	10:22 11:22	1606.0 1516.7	1516.7 1417.7	89.3 99.0	2.83 2.83	2.70 2.70	5.53 5.53	1.08 1.08	23.56 24.27	975.57 975.04	16.3 18.0	184.4 185.0
121-180	10:23	11:22	1516.7	1417.7	99.0 103.4	2.83 2.83	2.70 2.70	5.53 5.53	1.08	24.27 24.69	975.04 974.08	18.0	185.4
181-240	12:23	13:22	1314.3	1206.1	103.4	2.83	2.70	5.53	1.09	24.85	974.06	19.7	185.8
241-300	13:23	14:22	1206.1	1103.8	100.2	2.83	2.70	5.53	1.09	24.83	972.43 971.97	18.7	185.9
301-360	14:23	15:22	1103.8	1003.5	100.3	2.83	2.70	5.53	1.08	24.88	973.35	18.3	185.7
AVERAGE FO				1000.0	100.4	2.83	2.70	5.54	1.08	24.53	973.74	18.3	185.6
WEIGHT C	711 000 IVIII 10	J 1 L 10 (D71171		100.1	2.00	2.70	0.0 1	1.00	21.00	010.11	10.0	100.0
ACCEPTANC	E				100 +/- 20					25 +/- 2		18.4 +/- 3.6	180 +/- 9.0
GRAVIMETR	IC DATA										_		
IMPACTOR S	UBSTRATE	S				SAMPLE	FILTER						
Backup Filter		-	0.00000	g		Tare Mas			11.74	g			
Total Mass G	` '		0.00019	•		Final Ma			11.86	•			
				Mass Gain 0.12					_				
OUTLET CON	NCENTRATI	ON								_			
Total Volume Mean Outlet F Mean Outlet F	Particle Conc			s		6.91 .0000000 .0000275	g/m ³				DATA PRO	OCESSING (OPERATOR:

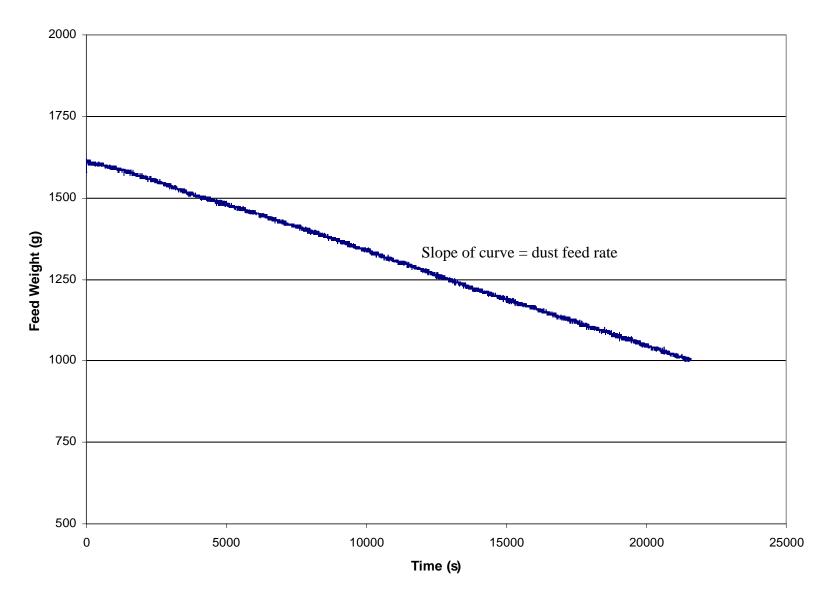


Figure C-5. Change in Pural NF dust scale reading with time during performance period 2V02-R3


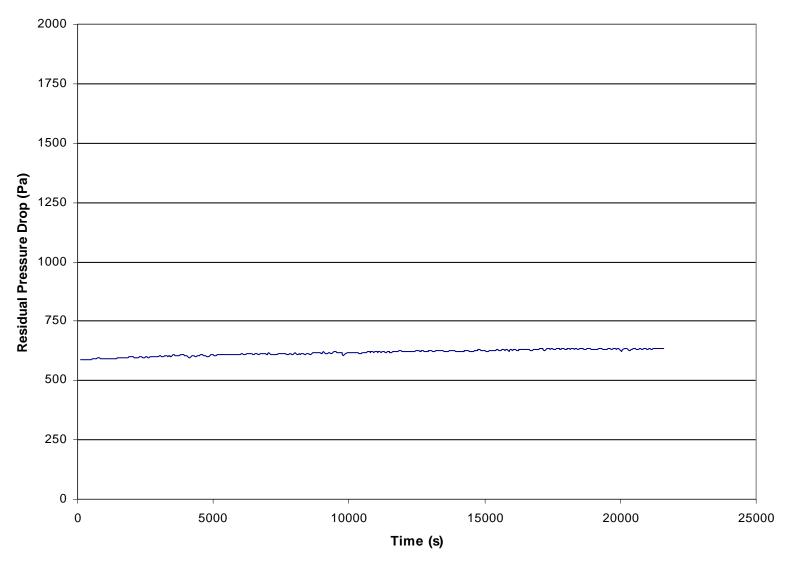


Figure C-6. Residual pressure drop across filter fabric during performance period 2V02-R3



Appendix D

FABRIC MANUFACTURE'S SUBMITTAL LETTER





BHA Group, Inc. 8800 East 63rd Street Kansas City, Missourl USA 64133-4883 TEL +1-816-356-8400 ext. 1523 FAX +1-816-246-1183 www.bhagroup.com

January 16, 2001

Mr. Jack Mycock ETS Inc. 1401 Municipal Road NW. Roanoke, Virginia 24012 - 1309

Dear Jack.

Please be advised we have today shipped to your attention samples of BHA filtration media for inclusion in the 2nd round of Baghouse Verification Product testing. You should already have received a faxed copy of our acceptance of the ETS Inc, terms and conditions, which was signed by Mr. Tony Thill our V.P. of Business Development, yesterday.

The samples of media shipped to you are made of a polyester needlefelt substrate with a expanded, microporous membrane, thermally laminated to the filtration/dust cake surface. This product is traditionally converted into filter bags and used to capture fine particulate in many ambient and hot gas filtration applications. Our product code for this media is QP131. This is standard product for BHA, that we produce several thousand yards of media per month. This sample media was taken from a 250yd master roll produced in early December 2000. Per your instructions, we have sent (9) samples at 18 x 36" in dimension. The nine samples are made up of 3 samples from the beginning, middle and end of the master roll.

The samples have been labeled per your instructions in item 9, of the DRAFT version of the "generic verification protocol for baghouse filtration products" document from 11/1/99. Hopefully these samples are accepted with your full approval.

With regards to the cost of the testing, it is our understanding that 50% of the cost will be covered by the EPA and 50% covered by BHA. This equates to \$5,000, and I have attached the relevant purchase order to this letter.

Should you have any comments or questions, please do not hesitate to call,

Best Regards,

Alan Smithies

Technical Director - Product Development e-mail asmithies@bhatechnologies.com

World Leader in Innovative Filtration Technology