Environmental Technology Verification Report

Baghouse Filtration Products

Menardi-Criswell 50-504 Filter Sample

Prepared by





Under a Cooperative Agreement with





Environmental Technology Verification Report

Baghouse Filtration Products

Menardi-Criswell 50-504 Filter Sample

Prepared by

Pete Brown John Mycock Air Pollution Control Technology Program ETS, Incorporated 1401 Municipal Road Roanoke, VA 24012

EPA Cooperative Agreement CR 826152-01-2

EPA Project Manager: Theodore G. Brna Air Pollution Prevention and Control Division National Risk Management Research Laboratory Office of Research and Development Research Triangle Park, NC 27711

September 2000

Notice

This document was prepared by ETS, Inc. (ETS) under a contract with Research Triangle Institute (RTI) with funding from Cooperative Agreement No. CR826152-01-2 with the U.S. Environmental Protection Agency (EPA). The document has been subjected to RTI/EPA's peer and administrative reviews and has been approved for publication. Mention of corporation names, trade names, or commercial products does not constitute endorsement or recommendation for use of specific products.

Availability of Verification Statement and Report

Copies of the public Verification Statement and Verification Report are available from the following:

1. Research Triangle Institute

P.O. Box 12194

Research Triangle Park, NC 27709-2194

Web site: http://etv.rti.org/apct/index.html

or http://www.epa.gov/etv (click on partners)

2. USEPA / APPCD

MD-4

Research Triangle Park, NC 27711

Web site: http://www.epa.gov/etv/library.htm (electronic copy)

http://www.epa.gov/ncepihom/

Abstract

Baghouse filtration products (BFPs) were evaluated by the Air Pollution Control Technology (APCT) pilot of the Environmental Technology Verification (ETV) Program. The performance factor verified was the mean outlet particle concentration for the filter fabric as a function of the size for particles equal to and smaller than 2.5 μ m in aerodynamic diameter (PM 2.5). The ETV APCT Pilot Program developed a generic verification protocol for testing baghouse filtration products that is based on a modified VDI Method 3926. The protocol was developed by RTI and ETS, reviewed by a technical panel of experts, and approved by EPA. The protocol addresses several issues that VDI Method 3926 does not cover, including periodic testing, acquisition of BFP samples for testing, and product definition. A Test/Quality Assurance Plan and a Standard Operating Procedure were prepared to address the test procedure and quality assurance and quality control requirements for obtaining verification data of sufficient quantity and quality to satisfy the data quality objectives.

ETS performed tests on Menardi-Criswell's filter sample 50-504 during the period of April 17-26, 2000. Mean outlet particle concentrations for total mass and PM 2.5 were determined. In addition, the following verification parameters were measured and reported: residual pressure drop increase, average residual pressure drop, average filtration cycle time, and mass gain of the filter sample.

Table of Contents

	<u>Page</u>
Verification S	Statementi
Notice	vii
Availability o	of Verification Statement and Reportviii
Abstract	ix
List of Figure	esxi
List of Table	s
List of Abbre	eviations and Acronyms xii
Acknowledgi	ments xiv
Section 1.	Introduction
Section 2. 2.1.	Verification Test Description 1 Selection of Filtration Sample for Testing 2
Section 3.	Description of Filter Fabric
Section 4. 4.1. 4.2. 4.3.	Verification of Performance3Quality Assurance3Results3Limitations and Applications4
Section 5.	References
Appendix A.	Description of the Test Rig and the Methodology A-1
Appendix B.	Certificates of Calibration
Appendix C	Verification Testing Sheets C-1

List of Figures

	<u>Page</u>
Figure 1.	Photograph of the Menardi-Criswell's 50-504 filter fabric
Figure A-1.	Diagram of FEMA Test Apparatus
Figure C-1	Change in Pural NF dust scale reading with time during performance test run $V006-1$ $C-8$
Figure C-2	Residual pressure drop across filter fabric during performance test run V006-1
Figure C-3	Change in Pural NF dust scale reading with time during performance test run $V006-3$. $C-13$
Figure C-4	Residual pressure drop across filter fabric during performance test run V006-3 C-14
Figure C-5	Change in Pural NF dust scale reading with time during performance test run $V006-4$. $C-18$
Figure C-6	Residual pressure drop across filter fabric during performance test run V006-4 C-19
Figure C-7	Change in Pural NF dust scale reading with time during performance test run $V006-5$. $C-23$
Figure C-8	Residual pressure drop across filter fabric during performance test run V006-5
	List of Tables
Table 1. Te	st Conditions iii
	ghouse Filtration Product Test Resultsiv
	mmary of Verification Results
	Summary of Control Test Results

List of Abbreviations and Acronyms

APCT Air Pollution Control Technology

APPCD Air Pollution Prevention and Control Division

BFP baghouse filtration product

cfm cubic feet per minute

cm centimeters

cm w.g. centimeters of water gauge

DH Orifice pressure drop

Dia. diameter

DP pressure drop

DQO data quality objective

EPA U.S. Environmental Protection Agency
ETV Environmental Technology Verification
FEMA Filtration Efficiency Media Analyzer

fpm feet per minute

ft³ cubic feet

g grams

G/C gas-to-cloth ratio (filtration velocity)

gr grains

gr/dscf grains per dry standard cubic foot g/dscm grams per dry standard cubic meter

g/h grams per hour

g/m² grams per square meter

h hours inches

in. w.g. inches of water gauge

m meters mbar millibars

m/h meters per hour

m³/h cubic meters per hour

mm millimeters

MPa megapascals ms milliseconds NA not applicable

NIST National Institute of Standards and Technology

oz/yd² ounces per square yard

Pa pascals

PM particulate matter

PM 2.5 particulate matter 2.5 micrometers or smaller in aerodynamic diameter

psi pounds per square inch

QA quality assurance QC quality control

RTI Research Triangle Institute

s seconds

scf standard cubic feet

scfm standard cubic feet per minute
VDI Verein Deutscher Ingenieure

 $\begin{array}{ll} \mu g & \text{micrograms} \\ \mu m & \text{micrometers} \\ ^{\circ}C & \text{degrees Celsius} \end{array}$

°F degrees Fahrenheit

°R degrees Rankine

Acknowledgments

ETS acknowledges the support of all those who helped plan and conduct the verification activities. In particular, we would like to thank Ted Brna, EPA's Project Manager, and Paul Groff, EPA's Quality Assurance Manager, both of EPA's National Risk Management Research Laboratory in Research Triangle Park, NC. Finally, we would like to acknowledge the assistance and participation of Robby Moss of Menardi-Criswell.

For more information on the Baghouse Filtration Products Verification Testing, contact

John Mycock ETS, Inc. 1401 Municipal Road Roanoke, VA 24012 (540) 265-0004 jcm@etsi-inc.com

For more information on Menardi-Criswell's 50-504 baghouse fabric, contact

Sheri Bell Menardi-Criswell One Maxwell Drive Trenton, SC 29847 (803) 663-6551 sbell@menardifilters.com

SECTION 1 INTRODUCTION

The U. S. Environmental Protection Agency (EPA) has created the Environmental Technology Verification (ETV) Program to facilitate the deployment of innovative or improved technologies through performance verification and information dissemination. The ETV Program is intended to assist and inform those involved in the design, distribution, permitting, and purchase of environmental technologies.

The U.S. EPA's partner in the Air Pollution Control Technology (APCT) program is Research Triangle Institute (RTI). The APCT program, with the full participation of the technology developer, develops plans, conducts tests, collects and analyzes data, and reports findings. The evaluations are conducted according to a rigorous protocol and quality assurance and quality control oversight. The APCT Program verifies the performance of commercial-ready technologies used to control air pollutant emissions, with an emphasis on technologies for controlling particulate matter, volatile organic compounds, nitrogen oxides, and hazardous air pollutants. The program develops standardized verification protocols and test plans, conducts independent testing of technologies, and prepares verification test reports and statements for broad dissemination.

SECTION 2 VERIFICATION TEST DESCRIPTION

The baghouse filtration products were tested in accordance with the APCT "Generic Verification Protocol for Baghouse Filtration Products" and the "Test/QA Plan for the Verification Testing of Baghouse Filtration Products." This protocol incorporated all requirements for quality management, quality assurance, procedures for product selection, auditing of the test laboratories, and reporting format. The Generic Verification Protocol describes the overall procedures to be used for verification testing and defines the data quality objectives. The Test/QA Plan details how the test laboratory (ETS) will implement and meet the requirements of the Generic Verification Protocol.

Mean outlet particle concentration was determined from the Filtration Efficiency Media Analyzer (FEMA) test apparatus. The test apparatus consists of a brush-type dust feeder that disperses test dust into a vertical rectangular duct (raw-gas channel). A radioactive polonium-210 alpha source is used to neutralize the dust electrically before its entry into the raw-gas channel. A portion of the gas flow is extracted from the raw-gas channel through the test filter, which is mounted vertically at the entrance to a horizontal duct (clean-gas channel). The clean-gas flow is separated using an aerodynamic "Y" so that a representative sample of the clean gas flows through an Andersen impactor that determines the outlet particle concentration.

The particle size was measured while a fine dust was injected into the air stream upstream of the filter fabric sample.

The following series of tests was performed on three separate randomly selected filter fabric samples:

- Dust characterization (first sample fabric verification test only),
- Conditioning period,
- Recovery period, and
- Performance test period.

To simulate long-term operation, the test filter was first subjected to a conditioning period, which consists of 10,000 rapid pulse cleaning cycles under continuous dust loading. During this period, the time between cleaning pulses is maintained at 3 seconds. No filter performance parameters are measured in this period.

The conditioning period is immediately followed by a recovery period, which allows the test filter fabric to recover from rapid pulsing. The recovery period consists of 30 normal filtration cycles under continuous and constant dust loading. During a normal filtration cycle, the dust cake is allowed to form on the test filter until a differential pressure of 1,000 Pa (4.0 in. w.g.) is reached. At this point the test filter is cleaned by a pulse of compressed air from the clean-gas side of the fabric. The next filtration cycle begins immediately after the cleaning is complete.

Performance testing occurs for a 6-hour period immediately following the recovery period (a cumulative total of 10,030 filtration cycles after the test filter has been installed in the test apparatus). During the performance test period, normal filtration cycles are maintained and, as in the case of the conditioning and recovery periods, the test filter is subjected to continuous and constant dust loading.

The filtration velocity (G/C) and inlet dust concentrations are maintained at 180 ± 9 m/h (9.8 ± 0.5 fpm) and 18.4 ± 3.6 g/dscm (8.0 ± 1.6 gr/dscf), respectively, throughout all phases of the test.

Additional details on the test procedure are provided in Appendix A.

2.1 SELECTION OF FILTRATION SAMPLE FOR TESTING

The samples of filter fabric (50-504) were supplied to ETS directly from the manufacturer (Menardi-Criswell) with a letter signed by Ping Hao, Director of Technology, Menardi-Criswell, attesting that the filter media were selected at random in an unbiased manner from commercial grade media and have not been treated in any manner different from the media provided to customers. The manufacturer supplied the test laboratory with nine 46 by 91 cm (18 by 36 in.) filter samples. The test laboratory randomly selected three samples and prepared them for testing by cutting one test specimen of 150 mm (5.9 in.) diameter from each selected sample for insertion in the test rig sample holder. The sample holder has an opening of 140 mm (5.5 in.) in diameter, which is the dimension that is used to calculate the face area of the tested specimen.

SECTION 3 DESCRIPTION OF FILTER FABRIC

The Menardi-Criswell 50-504 filter fabric is a 16 oz/yd² singed microdenier polyester felt.

SECTION 4 VERIFICATION OF PERFORMANCE

4.1 QUALITY ASSURANCE

The verification tests were conducted in accordance with an approved Test/Quality Assurance (QA) Plan.² The EPA Quality Manager conducted an independent assessment of the test laboratory in February 2000 and found that the test laboratory was equipped and being operated as specified in the Test/QA Plan. The ETS Quality Assurance Officer and APCT Quality Assurance staff have reviewed the results of this test and have found that the results meet data quality objectives in the Test/QA Plan. Certificates of Calibration for the flow meters, flow transducers, weights, high resolution balance, thermometer, and humidity logger are provided in Appendix B.

4.2 RESULTS

Table 3 summarizes the mean outlet particle concentration measurements for the verification test periods. Measurements were conducted during the 6-h performance test period. The performance test period followed a 10,000 cycle conditioning period and a 30 cycle recovery period. Upstream and downstream particle concentration information for each verification test period is provided in Appendix C.

The average residual pressure drop across each filter sample at the nominal 180 m/h (9.8 fpm) filtration velocity [for a flowrate of $5.8 \text{ m}^3/\text{h}$ (3.4 cfm)] is also shown in Table 3. This pressure drop ranged from 13.33 to 16.49 cm w.g. (5.25 to 6.49 in. w.g.) for the four filter samples tested. The residual pressure drop increase ranged from 5.75 to 9.50 cm w.g. (2.26 to 3.74 in. w.g.) for the samples tested.

A total of five verification test runs were conducted. Run V006-2 was discontinued because of a malfunction of the FEMA's control program. Run V006-5 was conducted because of concern with the data spread between runs V006-1, V006-3, and V006-4. Runs V006-1 and V006-5 showed consistency of relationship between mass gain of sample filter and residual pressure drop. Likewise, runs V006-3 and V006-4 are consistent with each other. Subsequent review of the test data for these four runs shows them to be valid. All four runs are used to compute the averages given in Table 3.

TABLE 3. SUMMARY OF VERIFICATION RESULTS FOR MENARDLCRISWELL 50-504

Test Run Number	V006-1	V006-3	V006-4	V006-5	Average*
	-				
PM 2.5 (g/dscm)	0.000000	0.000052	0.000005	0.000019	
Total PM (g/dscm) **	0.000005	0.000227	0.000019	0.000027	0.000070
Average Residual Pressure Drop	16.41	13.33	13.85	16.49	15.02
(cm w.g.)					
Residual Pressure Drop Increase	8.75	5.75	7.34	9.50	7.84
(cm w.g.)					
Mass Gain of Sample Filter (g)	2.15	1.83	1.87	2.16	2.00
Average Filtration Cycle Time (s)	6	6	6	6	6

^{*} Run V006-2 was voided and is not included in the averages. The remaining four runs are included.

^{**} Standard conditions: 101.3 kPa (14.7 psia) and 20°C (68°F). One or more of the impactor substrate weight changes for these results were near the reproducibility of the balance.

4.3 LIMITATIONS AND APPLICATIONS

This verification report addresses two aspects of baghouse filtration product performance: outlet particle concentration and pressure drop. Users may wish to consider other performance parameters such as service life and cost when selecting a baghouse filtration fabric for their application.

In accordance with the generic verification protocol, this Verification Statement is applicable to baghouse filtration products manufactured between [Date will be added after verification statement is signed and it is placed on the web.] of the Verification Statement and 3 years thereafter.

SECTION 5 REFERENCES

- 1. Generic Verification Protocol for Baghouse Filtration Products, Research Triangle Institute, Research Triangle Park, NC, February 2000. Available at the Website http://etv.rti.org/apct/pdf/baghouseprotocol.pdf.
- 2. Test/QA Plan for the Verification Testing of Baghouse Filtration Products, ETS, Incorporated, Roanoke, VA, February 1999. (Appendix C of this document is a standard operating procedure.)

Appendix A	
DESCRIPTION OF THE TEST RIG AND THE METHODOLOGY	

DESCRIPTION OF THE TEST RIG AND METHODOLOGY

TEST APPARATUS

The tests were conducted in ETS' FEMA test apparatus (Figure A-1). The test apparatus consists of a brush-type dust feeder that disperses test dust into a vertical rectangular duct (raw-gas channel). The dust feed rate is continuously measured and recorded via an electronic scale located beneath the dust feed mechanism. The scale has a continuous readout with a resolution of 10 g. A radioactive polonium-210 alpha source is used to neutralize the dust electrically before its entry into the raw-gas channel. An optical photo sensor monitors the concentration of dust and ensures that the flow is stable for the entire duration of the test. The optical photo sensor does not measure concentration. A portion of the gas flow is extracted from the raw-gas channel through the test filter, which is mounted vertically at the entrance to a horizontal duct (clean-gas channel). The clean-gas channel flow is separated in two gas streams, a sample stream and a bypass stream. An aerodynamic "Y" is used for this purpose. The aerodynamic "Y" is designed for isokinetic separation of the clean gas with 40 percent of the clean gas entering the sample-gas channel without change in gas velocity. The sample-gas channel contains an Andersen impactor for particle separation and measurement. The bypass channel contains an absolute filter. The flow within the two segments of the "Y" is continuously monitored and maintained at selected rates by adjustable valves. Two vacuum pumps maintain air flow through the raw-gas and clean-gas channels. The flow rates, and thus the G/C through the test filter, are kept constant and measured using mass flow controllers. A pressure transducer is used to measure the average residual pressure drop of the filter sample. The pressure transducer measures the differential pressure across the filter samples 3 seconds after the cleaning pulse. The pressure drop measurements are averaged as stated in Appendix C, SOP, section 4.4.1. High efficiency filters are installed upstream of the flow controllers and pumps to prevent contamination or damage caused by the dust. The cleaning system consists of a compressed-air tank set at 0.52 MPa (75 psi), a quick-action diaphragm valve, and a blow tube (25.4 mm [1.0 in.] dia.) with a nozzle (3 mm [0.12 in.] dia.) facing the downstream side of the test filter.

CONTROL TESTS

Two types of control tests were performed during the verification test series. The first was a dust characterization, which was performed at the beginning of the first verification test. The reference dust that was used during the verification tests was Pural NF aluminum oxide dust. The Pural NF dust was oven dried for 2 h and sealed in an airtight container prior to its insertion into the FEMA apparatus. The dust characterization results had to meet the requirements of $1.0 \pm 0.5~\mu m$ mass mean diameter and $76 \pm 10~\%$ less than $2.5~\mu m$ to continue the verification test series.

The second control test that was performed was the reference value test. The reference value test is performed quarterly using the reference fabric and the FEMA apparatus. The reference value test determines the weight gain of the reference fabric as well as the maximum pressure drop. The results of the test verify that the FEMA apparatus is operating within the required parameters. The reference value test measurements must meet the following requirements of weight gain of reference fabric equal to 0.93 ± 0.09 g and a reference fabric maximum pressure drop of 1.84 ± 0.18 cm w.g. to proceed with verification testing.

The results of the control tests are summarized in Table A-1.

TABLE A-1. SUMMARY OF CONTROL TEST RESULTS

	Requirement	Measured Value	Met Requirements?
Mass Mean Diameter, µm	1.0 ± 0.5	0.98	Yes
% Less than 2.5 µm	76 ± 10	80	Yes
Weight Gain, g	0.93 ± 0.09	0.84	Yes
Maximum Pressure Drop,	1.84 ± 0.18	1.71	Yes
cm w.g.			

Analysis

The equations that were used for verification analysis are described below.

 A_f = Exposed area of sample filter, m^2

 C_{ds}^{l} = Dry standard outlet particulate concentration of total mass, g/dscm $C_{2.5ds}$ = Dry standard outlet particulate concentration of PM 2.5, g/dscm

d = Diameter of exposed area of sample filter, m

F_a = Dust feed concentration corrected for actual conditions, g/m³ F_s = Dust feed concentration corrected for standard conditions, g/dscm

G/C = Gas-to-cloth ratio, m/h

M_t = Total mass gain from Andersen Impactor, g

 $M_{2.5}$ = Total mass gain of particles equal to or less than 2.5 μm diameter from Andersen Impactor, g. This value may

need to be linearly interpolated from test data.

N = Number of filtration cycles in a given performance test period

P_{avg} = Average residual pressure drop, cm w.g.

P_i = Residual pressure drop for ith filtration cycle, cm w.g.

P_s = Absolute gas pressure as measured in the raw gas channel, mbar

 Q_a = Actual gas flow rate, m³/h

 Q_{ds} = Dry standard gas flow rate, dscmh

 $\begin{array}{lll} Q_{2.5ds} & = & Dry \ standard \ gas \ flow \ rate \ for \ 2.5 \ \mu m \ particles, \ dscmh \\ Q_{st} & = & Standard \ gas \ flow \ rate \ for \ a \ specific \ averaging \ time, \ t, \ dscmh \end{array}$

t = Specified averaging time or sampling time, s

 t_c = Average filtration cycle time, s T_s = Raw gas channel temperature, °F

w_f = Weight of dust in feed hopper following specified time, g. Because of vibrations causing short-term fluctuations to the feed hopper, it is recommended that this value be measured as a 1-min average.

w_i = Weight of dust in feed hopper at the beginning of the specified time, g. Because of vibrations causing shortterm fluctuations to the feed hopper, it is recommended that this value be measured as a 1-min average.

Conversion factors and standard values used in the equations are listed below.

460 = 0 °F. in °R

1013 = Standard atmospheric pressure, mbar

528 = Standard temperature, °R

Area of Sample Fabric - A_f $A_f = (\pi * d^2)/4$

 $\begin{aligned} & \text{Actual Gas Flow Rate - } Q_a \\ & Q_a = Q_{ds} * \left \lceil \underbrace{(T_s + 460) * 1013}_{P_s * 528} \right \rceil \end{aligned}$

 $\begin{aligned} & Gas\text{-to-Cloth Ratio - G/C} \\ & G/C = Q_a \: / \: A_f \end{aligned}$

Standard Dust Feed Concentration - $F_s,$ for a specified time – t F_s = (w_i-w_f) / (Q_{st} * t)

Actual Raw Gas Dust Concentration - F_a $F_a = F_s * \left[\frac{(T_s + 460) * 1013}{P_s * 528} \right]$

Dry Standard Clean Gas Particulate Concentration, Total Mass – C_{ds} = $\,M_{_{t}}$ / [$\,Q_{ds}$ * t * (1 - % $H_{2}O/100)$]

Dry Standard Clean Gas Particulate Concentration, PM-2.5 - $C_{2.5ds}$ = $\,M_{2.5}$ / [$Q_{2.5ds}$ * t * (1 - % $H_2O/100)$]

Filtration Cycle Time - t_c $t_c = t/N$

Average Residual Pressure Drop - P_{avg} $P_{avg} = \Sigma P/N$

REFERENCES

1. Test/QA Plan for the Verification Testing of Baghouse Filtration Products, ETS, Incorporated, Roanoke, VA, February 1999.

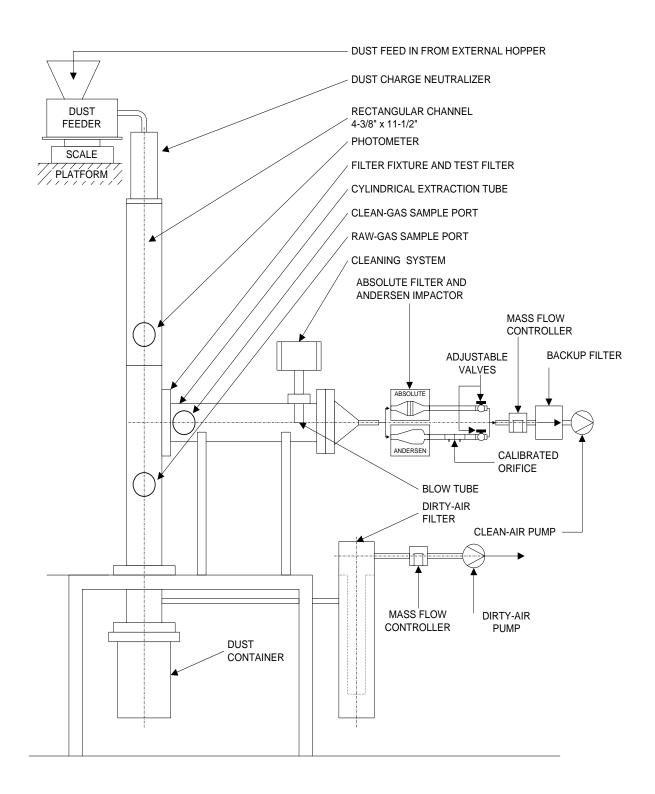


Figure A-1. Diagram of FEMA Test Apparatus

Appendix B
CERTIFICATES OF CALIBRATION

Measurement Controls, Inc.

107 Center Lane P.O. Box 997 Huntersville, NC 28070

> Telephone (704) 875-2034 Fax (704) 875-3480

June 8, 1999

ETS, INC. Attn: Bill Hayes

RE-CERTIFICATION OF CALIBRATION

ROCKWELL S-275 # 009548

FLOW RATE	VOLUME	Y	AVE. Y
90 CFH	1.9980	1.00002	
	1.9980	1.00002	
	1.9970	1.00052	1.0002
60 CFH	1,9960	.99931	
	1.9970	.99881	
	1.9960	.99931	.9991
33 CFH	1.9920	1.0006	
	1.9940	.99958	
	1.9930	1.0001	1.0001

OVERALL AVERAGE Y=

.9998

Calibration performed on American Bell Prover # 2989, certification dated 10-23-95, certified to 0.00% Error and traceable to the N.I.S.T.

Ву

Measurement Controls, Inc.

Larry B. Lane

Data Sheet - 5 Point

Positive Pressure Calibration Data Sheet

Teledyne Electronic Technologies Hastings Instruments

11/1/99

Flow Transducer

Customer:

KLAUS SCHAEFER GMBH

Model: HFC-203 S/N: 123917

Range:

0 TO 100.0 SLPM OF AIR @ 0°C

Laminar Flow Element

Model: S/N:

TET-HI No.:

202085

FS mv:

1.084

Ref. Sta	andard	Ref. Std Documentation				Flow Unit	Correction	n Factor	8	Std. Conditions		
	:				Cal Due	Type	From	To	K			
CDR#	648	DMM:	CDR-	63	11/4/99	Gas	Аіг	AIR	1.0000	Т	0°C	
		Thermometer:	CDR-	703	7/20/00	Units	SLPM	SLPM	1.0000	P	760 mmHg	
C0=	-0.0146919	Manometer:	CDR-	772	5/16/00	Temp	о°С	0.0°C	1.0000	٧	181.2 μp	
C1=	32.124769	Barometer:	CDR-	772	5/16/00	Other			1.0000			
C2=	-0.726126					Ktot=			1.0000			
C3=	0.04774077	٠										
C4=	-0.0048432		CDR#	648	1/24/00							
C5=	0.00021761					İ						
Refere	nce Indica	tion Pres	s/Temp/	√isc. Fa	ctor	Ref. I	Flow		Indicated	Flow	Deviation	
Mano	Temp	Pres				Flow	Flow	Flow	Flow	Fiow		
	0_											

1/6101011	ce maic	auon	1100	Cilipie	130. 1 40		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	1101.11011					
Mano "H ₂ O	Temp	Pres mmHg	KI.	Кр	Ку	Ktpv	Flow ALPM	Flow SLPM	Flow SLPM	Flow Volts	Flow SLPM	%FS	%PT
		•				•	•	Air	AIR		AIR		•
3.59	22.5	772	0.924	1.020	0,993	0.936	3 107.5	100.6	100.58	5.000	100.0	-0.6%	-0.6%
2.80	22.4	772	0.924	1.019	0.993	0.936	85,1	79.6	79.65	4.000	80.0	0.3%	0.4%
2.06	22.4	772	0.924	1.018	0.993	0.935	5 63.4	59,3	59.29	3.000	60.0	0.7%	1.2%
1.35	22.5	772	0.924	1.017	0.993	0.934	42.1	39.3	39.30	2.000	40.0	0.7%	1.7%
0.67	22.5	772	0.924	1.017	0.993	0.933	3 21.0	19.6	19.63	1.000	20.0	0.4%	1.9%
0.00	22.5	772	0.924	1.016	0.993	0.932	2 0.0	0.0	-0.01	0.000	0.0	0.0%	

Calibration Performed By: CH

Calibration Date: 10/30/99

Recommended recalibration due date by: 10/31/00

All Calibrations are in compliance with MIL-Std-45662A

All instruments are calibrated with standards traceable to the National Institute of Standards and Technology

Data Sheet - 5 Point Positive Pressure Calibration Data Sheet Teledyne Electronic Technologies Hastings Instruments

4/7/99

Flow Transducer

Model: HFC-203

Customer:

KLAUS SCHAEFER GMBH

S/N: 119148

Range:

0 TO 200 SLPM OF AIR

Laminar Flow Element

Model: S/N:

TET-HI No.:

201547

FS mv:

0.861

Ref. Standard		Ref. Std Documentation			Flow I	Flow Unit Correction Factors				Std. Conditions		
CDR#	650 :	DMM:		407	Type Gas	From Air	To AIR	K 1.0000	Ţ	0°C		
		Thermometer:	CDR-	509	Units	SLPM	SLPM	1.0000	P	760 mmHg		
C0=	-0.0035382	Manometer:	CDR-	714	Temp	о°С	0.0°C	1.0000	V	181.2 µp		
C1=	62.277749	Barometer:	CDR-	714	Other			1.0000		• •		
C2=	-1.7904816				Ktot=			1.0000				
C3=	0.12004571									•		
C4=	-0.0055349											
C5=	5.2275E-05											

Reference Indication		Pres/Temp/Visc. Factor			ctor	Ref. Flow		Indicated Flow			Deviation		
Mano "H ₂ O	Temp ⁰ C	Pres				64.	Flow	Flow	Flow	Flow	Flow		
		mmHg	Ki .	•		SLPM Air	SLPM AIR	Volts	SLPM AIR	%FS	FS %PT		
3.82	23.1	765	0.922	1.011	0.991	0.924	217.3	200.9	200.91	5.00	200	-0.5%	-0.5%
3.00	23.1	765	0.922	1.010	0.991	0.924	173.5	160,3	160.26	4.00	160	-0.1%	-0.2%
2.22	23.1	765	0.922	1.009	0.991	0.923	130,6	120.5	120.51	3.00	120	-0.3%	-0.4%
1.46	23.4	764	0.921	1.007	0.991	0.919	87.5	80.4	80.37	2.00	80	-0.2%	-0.5%
0.71	23.6	764	0.920	1.006	0.990	0.917	43.4	39.8	39.75	1.00	40	0.1%	0.6%
0.00	23.6	764	0.920	1.005	0.990	0.916	0.0	0.0	0.00	0.00	0	0.0%	

Calibration Performed By:

Calibration Date: 4/07/99

Recommended recalibration due date by: 4/8/00

All Calibrations are in compliance with MIL-Std-45662A

All instruments are calibrated with standards traceable to the National Institute of Standards and Technology

CALIBRATION CERTIFICATE

Applied Weight Technology,Inc.-1216 Willie Spoon Lane-Burlington,NC 27217 TEL 336-570-2511 / FAX 336-226-4832

		IEL 336-	5/0-2511/	/ FAX 336	-220-4632			
ETS, Inc.					TO	DDAY'S DATE	ITEM#	
1401 Municipa	il Road					9/20/99	2	
·					N	EXT CALIBRAT		
Roanoke,	VA	24012				August 31,	2000	
CONTACT	•••				M	DDEL	SERIAL	NUMBER
Terry Williams	on				2€	32SMA-FR	16157	
DEPARTMENT					C	APACITY	READA	BILITY
Field Prep.					62	2g/205g	+/000	001/.0001
ROOM #	BUILDING				C	USTOMER SPE	CIFICATIO	18
Lab	Main				_	/A		
TECT WEIGHT O	PATIFICATION IN	FARMATION						*
NIST CERTIFICATION	ERTIFICATION IN		VT. SET CALIBRA	ATEN WIT O	ET CALIDDATIC	SN BUE		
822 / 253521-9			August 199		August 200			
822 / 253521-9			August 199		August 200			
			_		August Evo	•		
CLASS OF TEST WT.	VALUE OF TEST WI	. READINGS	PROIR TO ADJ.	% ERROR	AFTER ADJ. R	EADING 9	% ERROR	ZERO TEST
1	0.100001g			-100.0000	0.0999	8g .(0.0210%	0.00000g
1	1.000015g			-100.0000	1.0000	0g _(0.0015%	0.00000g
. 1	10.000028g			-100.0000	9.9999	8g	0.0005%	0.00000g
1	100.00001g			-100.0000	99.999	8g -(0.0002%	0.0000g
1	*200.00015g			-100.0000	200.000)2g (0.0000%	0.0000g
COMMENTS			CORNER	LOAD TEST				
Nev	v Unit Set Up -		CORNER LO	AD TEST WT.				
				00028g	•			
CUSTOMER REQUIR	EMENTS:				A 10.0000	03g		
				' \				
			/ _	в	B 9.9999)8g		
			D	٦	c 9.9999	98 g		
					10.000	00g		
		\sim	FR	ONT				
		()(,)	Not Applicable to		nces			
Ŧ	=>() H							

Traceable Certificate

TROEMNER • 201 WOLF DRIVE • P.O. BOX 87 • THOROFARE, NJ 08086-0087 USA • PHONE (858) 686-1600 • FAX (858) 686-1601

Ets Inc

1401 Municipal Road Roanoke, VA 24012 Test Completed: 09/15/1999

Order Number : 01-1217 Certificate # : 152227A

Description of Weights: Troemner 500 g Elec Cal Cyl Weight

Material

Assumed Density at 20°C

Range

Stainles Steel

7.85g/cm3

500 g

Tested with Reference Standards Traceable to the National Institute of Standards & Technology through NIST Test Number 822/254480.

We certify that the weights listed are calibrated to ASTM E617-91 Class 1 tolerances.

The calibration of these weights is based on apparent mass vs. material of density 8.0g/cm3.

Nominal Mass Value	Serial Number	Correction *	Tolerance (+ or -)
500 g	37671	+0.5218 mg	1.200 mg

^{*} Correction is defined as the difference between the mass value of a weight and its nominal value. A positive correction indicates that the mass value is greater than the nominal value by the amount of the correction.

Traceable Certificate

TROEMNER • 201 WOLF DRIVE • P.O. BOX 87 • THOROFARE, NJ 08086-0087 USA • PHONE (856) 686-1800 • FAX (856) 686-1801

Ets Inc 1401 Municipal Road Roanoke, VA 24012 Test Completed: 09/15/1999 Order Number : 01-1217 Certificate # : 152227B

Description of Weights: Troemner 2 kg Elec Cal Cyl Weight

<u>Material</u>

Assumed Density at 20°C

Range

Stainless Steel

7.85g/cm3

2 kg

Tested with Reference Standards Traceable to the National Institute of Standards & Technology through NIST Test Number 822/254480.

We certify that the weights listed are calibrated to ASTM E617-91 Class 1 tolerances.

The calibration of these weights is based on apparent mass vs. material of density 8.0g/cm3.

Nominal Mass Value	Serial Number	Correction *	Tolerance (+ or -)
2 kg	37672	+1.0431 mg	5.000 mg

^{*} Correction is defined as the difference between the mass value of a weight and its nominal value. A positive correction indicates that the mass value is greater than the nominal value by the amount of the correction.

Traceable Certificate

TROEMNER • 201 WOLF DRIVE • P.O. BOX 87 • THOROFARE, NJ 08086-0087 USA • PHONE (856) 686-1600 • FAX (856) 686-1601

Ets Inc 1401 Municipal Road Roanoke, VA 24012 Test Completed: 02/07/2000 Order Number : 01-1227 Certificate # : 161484

Description of Weights: Troemner 1g S/S S/K weight

Material

Assumed Density at 20°C

Range

Stainless Steel

7.85g/cm3

19

Tested with Reference Standards Traceable to the National Institute of Standards & Technology through NIST Test Number 822/254480.

We certify that the weights listed are calibrated to ASTM E617-91 Class 1 tolerances.

The calibration of these weights is based on apparent mass vs. material of density 8.0g/cm3.

Nominal Mass Value	Serial Number	Correction *	Tolerance (+ or -)
1 g	45300	+0.0178 mg	0.034 mg

^{*} Correction is defined as the difference between the mass value of a weight and its nominal value. A positive correction indicates that the mass value is greater than the nominal value by the amount of the correction.

Traceable Certificate

TROEMNER • 201 WOLF DRIVE • P.O. BOX 97 • THOROFARE, NJ 08086-0087 USA • PHONE (856) 686-1600 • FAX (856) 686-1801

Ets Inc

1401 Municipal Road Roanoke, VA 24012 Test Completed: 09/15/1999

Order Number : 01-1217 Certificate # : 152227

Description of Weights: Troemner 100 g S/S S/K Weight

Materiæl

Assumed Density at 20°C

<u>Range</u>

Stainless Steel

7.85g/cm3

100 g

Tested with Reference Standards Traceable to the National Institute of Standards & Technology through NIST Test Number 822/254480.

We certify that the weights listed are calibrated to ASTM E617-91 Class 1 tolerances.

The calibration of these weights is based on apparent mass vs. material of density 8.0g/cm3.

Nominal Mass Value	Serial Numb e r	Correction *	Tolerance (+ or -)
100 g	37670	+0.0238 mg	0.250 mg

^{*} Correction is defined as the difference between the mass value of a weight and its nominal value. A positive correction indicates that the mass value is greater than the nominal value by the amount of the correction.



Traceable Certificate

201 Wolf Drive + P.O. Box 87 + Thorotare. NJ 08086-0087 + Phone: 858-686-1600 + Fax: 856-686-1601 + www.troemner.com + e-mail: troemner@troemner.com

Ets Inc

1401 Municipal Road Roanoke, VA 24012 Test Completed: 08/30/1999

Order Number : 01-1211 Certificate # : 151748

Description of Weights: Troemner 1 mg Weight

Material

Assumed Density at 20°C

Range

Aluminum

 2.7 g/cm^3

1 mg

Tested with Reference Standards Traceable to the National Institute of Standards & Technology through NIST Test Number 822/254480.

We certify that the weights listed are calibrated to ASTM E617-91 Class 1 tolerances.

The calibration of these weights is based on apparent mass vs. material of density 8.0g/cm3.

Nominal Mass Value	Serial Number	Correction *	Tolerance (+ or -)
1 mg	37080	+0.0042 mg	0.010 mg

Correction is defined as the difference between the mass value of a weight and its nominal value. A positive correction indicates that
the mass value is greater than the nominal value by the amount of the correction.



Traceable Certificate

201 Wolf Drive • P.O. Box 87 • Thorofare, NJ 08086-0087 • Phone, 858-686-1600 • Fax: 856-886-1601 • www.troemner.com • e-mail: troemner@troemner.com

Ets Inc 1401 Municipal Road Roanoke, VA 24012 Test Completed: 08/20/1999 Order Number : 01-1211 Certificate # : 150843 Weight Set S/N: 36528

Description of Weights: Troemner 50 g - 300 mg Weight Set

<u>Material</u>

Assumed Density at 20°C

Range

Stainless Steel Stainless Steel (mg) 7.85g/cm3 7.95 g/cm3 50 g 300 mg

Tested with Reference Standards Traceable to the National Institute of Standards & Technology through NIST Test Number 822/254480.

We certify that the weights listed are calibrated to ASTM E617-91 Class 1 tolerances.

The calibration of these weights is based on apparent mass vs. material of density $8.0 \mathrm{g/cm}^3$.

Nominal Mass Value	Serial Number	Correction •	Tolerance (+ or -)	
50 g		+0.0580 mg	0.120 mg	
300 mg		-0.0037 mg	0.010 mg	

^{*} Correction is defined as the difference between the mass value of a weight and its nominal value. A positive correction indicates that the mass value is greater than the nominal value by the amount of the correction

Thermometer Calibration Report Traceable to NIST



29-Dec-99

VWR Scientific Products

Reference No

1544201

JB JB

1050 Satellite Blvd.

Distributor

VWR Scientific Co.

Suwanee GA 30024

Customer Rep

Telephone

Fax

Report No.

992117

Manufacturer H-B Instrument Company/MW

Serial No

3C2082

Item

Thermometer, Partial Immersion

Part No 61099-047

Range

18/89°F, 0.2°Div., 108mm Immersion

N.I.S.T. Standard	Instrument Tested	Correction (ITS-90)*	N.I.S.T. Serial No.	N.I.S.T. Test No.	Test Liquid	Emer. Stem** Temperature
20.000*F	19.920 ° F	0.080	471047	18321	Alcohol	• T
32.000*F	32.000 ° F	0.000	471047	18321	ice	• T
50.000° F	50.020 * F	-0.020	471047	18321	Water	72.0°F
70.000° F	70.020 * F	-0.020	471047	18321	Water	72.0° F
88.000° F	87.9 6 0 ° F	0.020	471047	18321	Water	72.0° F

T - Total Immersion

The Platinum Resistance Thermometer (PRT) serial numbers 419453 and 440026, used to calibrate this thermometer were calibrated with an AC Bridge at a frequency of 90Hz and a constant current of 1.0 mA. This procedure is based on the technical information contained in NIST Technical Note 1265. Comparison points used to calibrate the thermometer range from a temperature of -196.000°C to 420.000°C. PRT calibration uncertainty is estimated not to exceed 0.006°C. The calibration uncertainty of the AC Bridge and PRT is estimated not to exceed 0.026°C. This calibration is traceable to NIST and is in compliance with MIL-STD 45662A and ANSI/ASQC Q9002-1994.

We report that the thermometer bearing identification marks described above was tested in accordance with NBS Monograph 174, ASTM Method E27 and NIST Special Publication 819. Each instrument was tested at H-8 instrument Company or at manufacturers' laboratory and compared with standards traceable to the National Institute of Standards and Technology (formerly National Bureau of Standard) in accordance with the International Temperature Scale ITS-90 (Adopted September 1989). For a discussion of accuracy obtainable with such thermometers see NIST SP 250-23. As a general guideline, re-certification/re-calibration of thermometers once a year is considered acceptable in most manufacaboratory practices, but each organization must set its own policies.

James R. Robinson Vice President, Calibration Services

Form 0-592 Rev.3

H-B Instrument Company

P.O. Box 26770, Collegeville, PA 19426-0770 USA Fig. box 20770, Contegering, Fr. 15720-0770-037 Telephone 1-800-4-TEST-LAB Fax (610) 489-9100 e-mail Address: cal@hbinstrument.com Website Address: www.hbinstrument.com

Design Copyright CHBI 1996



Observed instrument readings should be increased by positive numbers or reduced by negative numbers indicated by a minus (-) sign Emergent Stem Temperature relates to PARTIAL IMMERSION thermometers ONLY (see reverse).

ACR Systems Inc. Unit 210-12960 84th Avenue, Surrey, B.C. V3W 1K7

Telephone: (604) 591-1128 Fax: (604) 591-2252

Toll-free: 1-800-663-7845

Relative Humidity Calibration

Model: SR2

Serial #: 66884

Date: 08-04-99

Calibration Data

Channel	Description	Eqn	Low	Mid	High
CH 0	Int Temp.	45	0.000	0.000	0.000
CH 1	Int RH	71	-0.391	0.000	0.352
CH 2	Ext Temp	45	0.000	0.000	0.000
CH 3	Ext RH	71	0.000	0.000	0.000
CH 4	NA.	-	-	-	-
CH 5	NA	-	-	-	-
CH 6	NA	-	-	-	-
CH7	NA	_	-	-	_

Calibration Reference Instrument

Vaisala 1% RH & Temperature Probe, Model HMP 133Y, Serial Number: 671381

Sensor or Input Type: Internal Relative Humidity

Ambient Temperature at time of test: 25 C

15.08 %RH
49.43 %RH
80.17 RH%

Test Part Number: 19655

Test Technician: tc

The calibration of this data logger is traceable to the National Institute of Standards and Technology (NIST) using the reference instrument above. The reference reading is verified by a daily salt test and calibrated by the manufacturer at monthly intervals. Details are available on request.



NRD, LLC 2937 ALT BLVD PO BOX 310 GRAND ISLAND, NY 14072-0310

800-525-8076 716-773-7634 716-773-7744 FAX nrd@ix.netcom.com a Mark IV Industries Company

LEAK TEST CERTIFICATE

CUSTOMER:			P.O. #		
	1401 MUNICIPAL ROAD NW		S.O. #		
	ROANOKE VA 2401	2			
eak test method _ erson performing	Polonium-210 (ource Isotope <u>P1</u> ess gas flow propor	atonium-239 Serial # 193/88 tional counter		
		257111 #	,		
TYPE DEVICE	MODEL#	SERIAL #	MICROCURIES/SAMPLE		
NUCLECEL	P-2031-1000	SERIAL #	MICROCURIES/SAMPLE Less than .0001uCi		
8-		,			
8-		,			
8-		,			
8-		,			
B-		,			
NUCLECEL	P-2031-1000	115608	Less than .000luCi		
NUCLECEL		115608	Less than .000luCi		
NUCLECEL	P-2031-1000	115608	Less than .0001uCi		

Annendiy C	VERIFIC	CATION TESTING SHEETS
		Appendix C

VERIFICATION TESTING OF BAGHOUSE FILTRATION PRODUCTS SUMMARY OF RESULTS

RUN ID. FABRIC DESIGNATION MANUFACTURER DUST FEED	V006-1 50-504-1 Menardi-Criswell	V006-2 * 50-504-5 Menardi-Criswell	V006-3 50-504-7 Menardi-Criswell	V006-4 50-504-9 Menardi-Criswell	V006-5 50-504-3 Menardi-Criswell	Average
DOST FEED	Pural NF	Pural NF	Pural NF	Pural NF	Pural NF	
DUST DATA						
Mass Mean Diameter (µm)	0.98					0.98
% Less than PM 2.5	79.73					79.73
CONDITIONING PERIOD						
Date Started	4/17/00	NA	4/19/00	4/24/00	4/25/00	
Time Started	9:59	NA	10:13	10:13	13:55	
Time Ended	18:19	NA	18:33	18:13	22:15	
Test Duration (min.)	500	NA	500	500	500	500
RECOVERY PERIOD						
Date Started	4/18/00	NA	4/20/00	4/25/00	4/26/00	
Time Started	7:05	NA	7:55	7:10	7:10	
Time Ended	7:09	NA	7:58	7:13	7:13	
Test Duration (min.)	4	NA	3	3	3	3
PERFORMANCE TEST PER	RIOD					
Date Started	4/18/00	NA	4/20/00	4/25/00	4/26/00	
Time Started	7:35	NA	8:19	7:30	7:31	
Time Ended	11:35	NA	14:19	13:30	13:31	
Test Duration (min.)	240	NA	360	360	360	330
VERIFICATION TEST RESU	LTS					
	<u> </u>					
Mean Outlet Particle Conc.	0.000000	NA	0.000052	0.000005	0.000019	0.000019
PM 2.5 (g/dscm)	0.000005	NIA	0.000007	0.000010	0.000027	0.000070
Mean Outlet Particle Conc. Total mass (g/dscm)	0.000005	NA	0.000227	0.000019	0.000027	0.000070
Increase in Residual Pressur	e 8.75	NA	5.75	7.34	9.50	7.84
Drop (cm w.g.)	0.75	IVA	5.75	7.54	5.50	7.04
Average Residual Pressure	16.41	NA	13.33	13.85	16.49	15.02
Drop (cm w.g.)	10.41	IVA	10.00	10.00	10.43	10.02
Mass Gain of Filter Sample ((g) 2.15	NA	1.83	1.87	2.16	2.00
acc cam or mor campio (2.10	100	1.00	7.07	2.10	2.00
Average Filtration Cycle Time (s)	6	NA	6	6	6	6

^{*} Run 2 was voided. NA indicates that there is No Applicable information for this run.

RTI/ETV PRELIMINARY TESTING DUST CHARACTERIZATION - PURAL NF ANDERSEN IMPACTOR PARTICLE SIZING GRAVIMETRIC ANALYTICAL DATA AND RESULTS

RUN NUMBER: V006 TEST DATE: 04/14/00

			Tare	Tare	Total	Total	Mass	Negative
Sample I.D.			Filter Mass	Beaker Mass	Tare Mass	Final Mass	Difference	Difference?
Filter I.D.	Wash Vol.(ml)	Stage	(g)	(g)	(g)	(g)	(g)	(g)
VDI-00-18	50	Acetone Wash	NA	0	0	0	0.00000	NA
00-18-1		1	1.35820	0	1.35820	1.35833	0.00013	NA
00-18-2		2	1.39845	0	1.39845	1.39850	0.00005	NA
00-18-3		3	1.40570	0	1.40570	1.40701	0.00131	NA
00-18-4		4	1.37477	0	1.37477	1.37709	0.00232	NA
00-18-5		5	1.39200	0	1.39200	1.39647	0.00447	NA
00-18-6		6	1.42812	0	1.42812	1.43687	0.00875	NA
00-18-7		7	1.39080	0	1.39080	1.40019	0.00939	NA
00-18-8		8	1.39182	0	1.39182	1.39778	0.00596	NA
00-18-9		9	1.42792	0	1.42792	1.43582	0.00790	NA

Total 0.04028

IMPACTOR PARTICLE SIZING RESULTS

 Impactor Flow Rate:
 0.176
 cfm


 Isokinetics:
 101.62
 %

 Viscosity of Gas:
 0.000163
 poise

	Particulate	Cummulative	
	Mass	% Less Than	D50 Cut Point
STAGE	(g)	Diameter	(micrometers)*
1	0.00013	99.68	11.04
2	0.00005	99.55	10.41
3	0.00131	96.30	6.50
4	0.00232	90.54	4.35
5	0.00447	79.44	2.45
6	0.00875	57.72	1.12
7	0.00939	34.41	0.69
8	0.00596	19.61	0.38
9	0.00790		

Mass Mean Diameter, micrometers 0.98 % Less Than PM 2.5 79.73

^{*} Calculated as an aerodynamic diameter using a particle density of 2.65 g/ml.

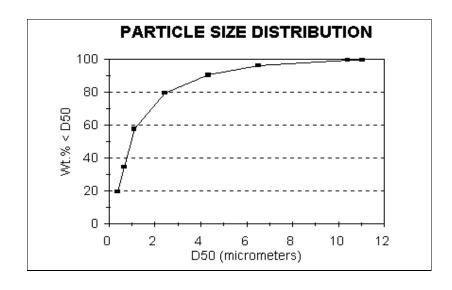

DUST CHARAC								
FOR TEST SER	IES:	V006						
DATE		04/14/00		DATA (FOF	R RAW GAS CHA	NNEL)		
START TIME		12:55		Actual Flov	V	5.80	m³/hr	
END TIME		1:00				3.41	cfm	
STACK LENGTH	Ⅎ	111	mm	Std. Flow		5.60	scm/hr	
STACK WIDTH		291	mm			3.30	scfm	
STACK AREA		0.0323	m^2	Raw Gas P	ressure	986.57	mbar	
NOZZLE I.D.		1.797	in.	Sample Ga	s Temperature	22.5	° C	
		0.046	m			72.6	° F	
METER BOX GA		0.9927						
BAROMETRIC F		29.17	in. Hg					
TEST DURATIO		5	min.					
METER VACUU	М	2.0	in. Hg					
INTERMEDIATE	RESULTS			METHOD 3	DATA			
Metered Volume		0.885	ft ³	%O2	20.9	Md	28.84	
Volume @ Std.	Cond.	0.848	scf	%CO2	0.0	Ms	28.73	
Volume at Raw	Gas Conditions	0.879	scf	%CO	0.0	Ps	29.13	in. Hg
Water		0.99	%	%N2	79.1			J
Isokinetics		101.6	%	O2+CO2	20.9			
	STACK			METER	METER TEMPE	ERATURE		
	TEMP	DP	DH	VOLUME	INLET	OUTLET		
POINT	(° F)	(in. w.g.)	(in. w.g.)	(liters)	(° F)	(° F)		
1	72.6	1E-05	6.125	5317.76	72	71		
				5342.82	77	72		
		Vo	olume Change:	25.06	73			

(Avg. of 4 Temps.)

Md - Dry Molecular Weight

Ms - Molecular Weight in Stack

Ps - Static Pressure (Atmospheric)

DH - Orifice Pressure Drop

DP - Pressure Drop

^{*} All measurements are primary measurements and might be converted in subsequent calculations.

CONDITIONING TEST PERIOD

RUN ID. V006-1 NUMBER OF PULSES 10000
FABRIC DESIGNATION 50-504-1 PULSE INTERVAL 3 s
MANUFACTURER Menardi-Criswell
DUST FEED Pural NF % Moisture 1.43 %WV

DATE(S) 4/17/00
TIME STARTED 9:59
TIME ENDED 18:19
TEST DURATION 500 min.

QA/QC DATA

Test Duration			D	ust Feed ((g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Ti	ime	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	9:59	10:59	1723.5	1645.5	77.9	2.82	2.70	5.52	22.82	973.47	14.3	184.0
61-120	11:00	11:59	1645.5	1556.0	89.5	2.83	2.69	5.52	23.73	972.79	16.4	184.4
121-180	12:00	12:59	1556.0	1452.7	103.4	2.83	2.69	5.52	24.15	971.84	19.0	184.8
181-240	13:00	13:59	1452.7	1347.0	105.6	2.83	2.49	5.31	24.60	970.84	20.2	171.2
241-300	14:00	14:59	1347.0	1238.0	109.0	2.83	2.68	5.51	24.78	970.37	20.1	185.0
301-360	15:00	15:59	1238.0	1127.0	111.0	2.83	2.68	5.51	24.71	968.88	20.4	185.2
361-420	16:00	16:59	1127.0	1024.6	102.4	2.83	2.68	5.51	24.68	967.82	18.9	185.5
421-480	17:00	17:59	1024.6	923.4	101.2	2.83	2.68	5.51	24.68	967.73	18.6	185.5
441-500 *	17:20	18:19	991.5	890.7	100.7	2.83	2.68	5.51	24.66	967.95	18.5	185.4
AVERAGE (pe	er hour)				99.9	2.83	2.66	5.49	24.28	970.36	18.5	183.3
ACCEPTANCE	=				100				25.5		18.4	180
ACCEPTANCE	=				+/- 20				25.5 +/- 2.2		+/- 3.6	+/- 9.0

^{*} Test duration is a rolling 60 minute average. The last 60 minute frame was determined by counting 60 minutes back from the last minute of the test.

DATA PROCESSING OPERATOR:

RECOVERY PERIOD

RUN ID.	V006-1	NUMBER OF PULSES	30
FABRIC DESIGNATION	50-504-1	AVG. PULSE INTERVAL	8 s
MANUFACTURER	Menardi-Criswell	AVG . RESIDUAL DP	1012.23 Pa
DUST FEED	Pural NF	MAX. PRESSURE DROP	1000 Pa
DATE(S)	4/18/00		
TIME STARTED	7:05 *	% Moisture	1.43 %WV
TIME ENDED	7:09		
TEST DURATION	4 min.		

QA/QC DATA

Test Duration			Dı	ust Feed	(g)	Average	Gas Flow	(sm³/hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Tir	me	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
1-4	7:06 *	7:09	898.5	860.6	37.8	2.81	2.71	5.52	22.5	971.06	7.0	185.6
AVERAGE (pe	r hour)				540.3	2.81	2.71	5.52	22.5	971.06	99.3	185.6
ACCEPTANCE	:				100				25.5		18.4	180
7.0021 17.1102	-				+/- 20				+/- 2.2		+/- 3.6	+/- 9.0

^{*} First minute is not considered in calculations due to equipment stabilization.

DATA PROCESSING OPERATOR:

PERFORMANCE TEST PERIOD

RUN ID. FABRIC DES MANUFACTU DUST FEED DATE(S) TIME STARTI TIME ENDED TEST DURAT	JRER ED) TION	V006-1 50-504-1 Menardi-C Pural NF 4/18/00 7:35 11:35 240	min.	stopped r	un	AVG. PU AVG. RE CHANGE	RESSURE	ERVAL DP		1607.09 857.5 1000	s Pa Pa		
Test Duration			Dı	ust Feed ((a)	Ave	erage Gas	Flow (si	m ³ /hr)	Ava. Temi	Ava Press	Dust Conc.	G/C Ratio
(min.)		me	Initial	Final	Total	Raw	Clean	Total	Sampling	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	7:35	8:35	1761.2	1658.7	102.5	2.82	2.69	5.51	1.04	22.44	971.90	18.9	183.8
61-120	8:36	9:35	1658.7	1556.0	102.7	2.83	2.69	5.52	1.04	22.63	972.15	18.9	184.1
121-180	9:36	10:35	1556.0	1452.9	103.1	2.83	2.69	5.52	1.04	22.79	971.86	18.9	184.1
181-240	10:36	11:35	1452.9	1346.7	106.1	2.83	2.69	5.52	1.03	22.93	972.25	19.5	184.0
241-300	11:36	12:35	1346.7	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
301-360	12:36	13:35	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
AVERAGE (p	er hour)				103.6	2.83	2.69	5.52	1.04	22.70	972.04	19.0	184.0
ACCEPTANC	E				100 +/- 20					25.5 +/- 2.2		18.4 +/- 3.6	180 +/- 9.0
GRAVIMETR	IC DATA										_		
IMPACTOR S Backup Filter Total Mass G	(PM 2.5)	:S	0.00000 0.00002	•		SAMPLE Tare Mas Final Ma Mass Ga	SS		12.55 14.70 2.15	g			
OUTLET CON	NCENTRATION	ON									_		
Total Volume Sampled 4.45 m³ Mean Outlet Particle Concentration - PM 2.5 0 g/m³ Mean Outlet Particle Concentration - Total Mass 0.0000045 g/m³					g/m³				DATA PRO	OCESSING	OPERATOR:		

Figure C-1. Change in Pural NF dust scale reading with time during performance test run V006-1.

Figure C-2. Residual pressure drop across filter fabric during performance test run V006-1.

CONDITIONING TEST PERIOD

RUN ID. V006-3 NUMBER OF PULSES 10000
FABRIC DESIGNATION 50-504-7 PULSE INTERVAL 3 s
MANUFACTURER Menardi-Criswell
DUST FEED Pural NF % Moisture 1.33 %WV

DATE(S) 4/19/00
TIME STARTED 10:13
TIME ENDED 18:33
TEST DURATION 500 min.

QA/QC DATA

Test Duration			Di	ust Feed (g)	Average	Gas Flow	(sm³/hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Т	īme	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	10:13	11:13	1759.7	1679.6	80.2	2.83	2.69	5.52	23.66	976.58	14.7	183.7
61-120	11:14	12:13	1679.6	1591.5	88.0	2.85	2.69	5.54	24.59	976.46	16.1	184.3
121-180	12:14	13:13	1591.5	1491.9	99.7	2.85	2.69	5.54	25.41	976.17	18.2	184.8
181-240	13:14	14:13	1491.9	1391.8	100.0	2.85	2.69	5.54	26.03	975.81	18.3	185.2
241-300	14:14	15:13	1391.8	1282.8	109.0	2.85	2.69	5.54	26.61	975.66	20.0	185.6
301-360	15:14	16:13	1282.8	1167.3	115.5	2.85	2.69	5.54	26.92	975.13	21.2	185.8
361-420	16:14	17:13	1167.3	1051.5	115.8	2.85	2.69	5.53	26.99	974.86	21.2	185.9
421-480	17:14	18:13	1051.5	935.7	115.8	2.85	2.69	5.53	26.88	975.05	21.2	185.7
441-500 *	17:34	18:33	1011.4	898.4	113.1	2.85	2.69	5.53	26.82	975.11	20.7	185.7
AVERAGE (pe	er hour)				103.4	2.84	2.69	5.53	25.92	975.69	18.9	185.1
ACCEPTANCE	Ξ				100				25.5		18.4	180
					+/- 20				+/- 2.2		+/- 3.6	+/- 9.0

^{*} Test duration is a rolling 60 minute average. The last 60 minute frame was determined by counting 60 minutes back from the last minute of the test.

DATA PROCESSING OPERATOR:

RECOVERY PERIOD

RUN ID.	V006-3	NUMBER OF PULSES	30
FABRIC DESIGNATION	50-504-7	AVG. PULSE INTERVAL	6 s
MANUFACTURER	Menardi-Criswell	AVG . RESIDUAL DP	974.03 Pa
DUST FEED	Pural NF	MAX PRESSURE DROP	1000 Pa
DATE(S)	4/20/00		
TIME STARTED	7:55 *	% Moisture	1.33 %WV
TIME ENDED	7:58		
TEST DURATION	3 min		

QA/QC DATA

Test Duration			Dı	ust Feed ((g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Tir	me	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
1-3	7:56 *	7:58	885.5	882.1	3.4	2.82	2.71	5.53	22.2	977.95	0.6	183.6
AVERAGE (per	r hour)				64.1	2.82	2.71	5.53	22.2	977.95	11.7	183.6
A COEDTANCE					100				25.5		10.4	100
ACCEPTANCE					100 +/- 20				25.5 +/- 2.2		18.4 +/- 3.6	180 +/- 9.0

^{*} First minute ix not considered due to equipment stabilization.

DATA PROCESSING OPERATOR:

PERFORMANCE TEST PERIOD

Mean Outlet Particle Concentration - Total Mass

Carried Carr	RUN ID. FABRIC DESIGNATION MANUFACTURER DUST FEED DATE(S) TIME STARTED TIME ENDED TEST DURATION	V006-3 50-504-7 Menardi- Pural NF 4/20/00 8:19 14:19	Criswell :)			AVG. PU AVG. RE CHANGE	RESSURE	ERVAL OP		1306.25 563.7 1000	S s 5 Pa		
(min.) Time Initial Final Total Raw Clean Total Sampling (° C) (mbar) (g/dscm) (m/h) 0-60 8:19 9:19 1496.6 1415.7 80.9 2.83 2.70 5.52 1.05 22.53 977.89 14.8 183.3 61-120 9:20 10:19 1415.7 1320.6 95.1 2.83 2.70 5.53 1.03 23.18 977.12 17.4 183.9 12-180 10:20 11:19 1320.6 1224.2 96.3 2.83 2.70 5.53 1.04 23.92 976.62 17.6 184.4 181-240 11:20 12:19 1224.2 1123.1 101.1 2.83 2.70 5.53 1.04 24.69 976.02 18.5 185.0 241-300 12:20 13:19 1123.1 1012.8 110.4 2.83 2.70 5.53 1.04 26.05 974.04 21.3 186.2 AVER									2				
0-60 8:19 9:19 1496.6 1415.7 80.9 2.83 2.70 5.52 1.05 22.53 977.89 14.8 183.3 61-120 9:20 10:19 1415.7 1320.6 95.1 2.83 2.70 5.53 1.03 23.18 977.12 17.4 183.9 121-180 10:20 11:19 1320.6 1224.2 96.3 2.83 2.70 5.53 1.04 23.92 976.62 17.6 184.4 181-240 11:20 12:19 1224.2 1123.1 101.1 2.83 2.70 5.53 1.04 24.69 976.02 18.5 185.0 241-300 12:20 13:19 1123.1 1012.8 110.4 2.83 2.70 5.53 1.05 25.45 975.21 20.2 185.6 301-360 13:20 14:19 1012.8 896.7 116.0 2.83 2.70 5.53 1.04 26.05 974.04 21.3 186.2 AVERAGE (per hour) 100.0 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 INDIVIDUAL PROPERTY OF ACCEPTANCE 100 2.83 2.70 2.70 2.70 2.70 2.70 2.70 2.70 2.70		_					_				-		
61-120 9:20 10:19 1415.7 1320.6 95.1 2.83 2.70 5.53 1.03 23.18 977.12 17.4 183.9 121-180 10:20 11:19 1320.6 1224.2 96.3 2.83 2.70 5.53 1.04 23.92 976.62 17.6 184.4 181-240 11:20 12:19 1224.2 1123.1 101.1 2.83 2.70 5.53 1.04 24.69 976.02 18.5 185.0 241-300 12:20 13:19 1123.1 1012.8 110.4 2.83 2.70 5.53 1.05 25.45 975.21 20.2 185.6 301-360 13:20 14:19 1012.8 896.7 116.0 2.83 2.70 5.53 1.04 26.05 974.04 21.3 186.2 AVERAGE (per hour) 100.0 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 IMPACTOR SUBSTRATES Backup Filter (PM 2.5) 0.00032 g											,	(0 /	
121-180				_									
181-240 11:20 12:19 1224.2 1123.1 101.1 2.83 2.70 5.53 1.04 24.69 976.02 18.5 185.0 241-300 12:20 13:19 1123.1 1012.8 110.4 2.83 2.70 5.53 1.05 25.45 975.21 20.2 185.6 301-360 13:20 14:19 1012.8 896.7 116.0 2.83 2.70 5.53 1.04 26.05 974.04 21.3 186.2 AVERAGE (per hour) 100.0 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 ACCEPTANCE 100 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 IMPACTOR SUBSTRATES Backup Filter (PM 2.5) 0.00032 g Tare Mass 12.72 g Total Mass Gain 0.00140 g Final Mass Gain 1.83 g			_				_						
241-300 12:20 13:19 1123.1 1012.8 110.4 2.83 2.70 5.53 1.05 25.45 975.21 20.2 185.6 301-360 13:20 14:19 1012.8 896.7 116.0 2.83 2.70 5.53 1.04 26.05 974.04 21.3 186.2 AVERAGE (per hour) 100.0 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 ACCEPTANCE 100 +/- 20 +/- 2.2 +/- 3.6 +/- 9.0 GRAVIMETRIC DATA IMPACTOR SUBSTRATES Backup Filter (PM 2.5) 0.00032 g Tare Mass 12.72 g Total Mass Gain 0.00140 g Final Mass 14.55 g Mass Gain 1.83 g									_				
301-360 13:20 14:19 1012.8 896.7 116.0 2.83 2.70 5.53 1.04 26.05 974.04 21.3 186.2 AVERAGE (per hour) 100.0 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 ACCEPTANCE 100 25.5 18.4 180 +/- 20 +/- 2.2 +/- 3.6 +/- 9.0 GRAVIMETRIC DATA IMPACTOR SUBSTRATES Backup Filter (PM 2.5) 0.00032 g Tare Mass 12.72 g Total Mass Gain 0.00140 g Final Mass 14.55 g Mass Gain 1.83 g		_		_	_		_		_				
AVERAGE (per hour) 100.0 2.83 2.70 5.53 1.04 24.30 976.15 18.3 184.8 ACCEPTANCE 100 +/- 20 100			_		_		_						
ACCEPTANCE 100 +/- 20 100 +/- 2.2 18.4 180 +/- 3.6 +/- 9.0 GRAVIMETRIC DATA IMPACTOR SUBSTRATES Backup Filter (PM 2.5) Total Mass Gain 0.00140 g Final Mass Mass Gain 1.83 g		14.19	1012.0	090.7									
+/- 20 +/- 3.6 +/- 9.0 GRAVIMETRIC DATA IMPACTOR SUBSTRATES Backup Filter (PM 2.5) 0.00032 g Tare Mass 12.72 g Total Mass Gain 0.00140 g Final Mass 14.55 g Mass Gain 1.83 g	AVERAGE (per flour)				100.0	2.03	2.70	3.33	1.04	24.30	970.13	10.5	104.0
+/- 20 +/- 3.6 +/- 9.0 GRAVIMETRIC DATA IMPACTOR SUBSTRATES Backup Filter (PM 2.5) 0.00032 g Tare Mass 12.72 g Total Mass Gain 0.00140 g Final Mass 14.55 g Mass Gain 1.83 g	ACCEPTANCE				100					25.5		18.4	180
IMPACTOR SUBSTRATES Backup Filter (PM 2.5) Total Mass Gain SAMPLE FILTER Tare Mass 12.72 g Final Mass 14.55 g Mass Gain 1.83 g	7.00202											_	
IMPACTOR SUBSTRATES Backup Filter (PM 2.5) Total Mass Gain SAMPLE FILTER Tare Mass 12.72 g Final Mass 14.55 g Mass Gain 1.83 g													
Backup Filter (PM 2.5) 0.00032 g Tare Mass 12.72 g Total Mass Gain 0.00140 g Final Mass 14.55 g Mass Gain 1.83 g	GRAVIMETRIC DATA												
Backup Filter (PM 2.5) 0.00032 g Tare Mass 12.72 g Total Mass Gain 0.00140 g Final Mass 14.55 g Mass Gain 1.83 g	IMPACTOR SUBSTRAT	FS				SAMPLE	FII TER						
Total Mass Gain 0.00140 g Final Mass 14.55 g Mass Gain 1.83 g			0.00032	a					12.72	a			
Mass Gain 1.83 g	. , ,			•						•			
OUTLET CONCENTRATION				J		Mass Ga	ain			•			
OUTLET CONCENTRATION											_		
	OUTLET CONCENTRAT	ION								_			
Total Volume Sampled 6.67 m ³ DATA PROCESSING OPERATOR:	Total Volume Sampled					6.67	m ³				DATA PR	OCESSING	OPERATOR:
Mean Outlet Particle Concentration - PM 2.5 0.0000480 g/m ³	·	ncentration	- PM 2.5		C								

 0.0002100 g/m^3

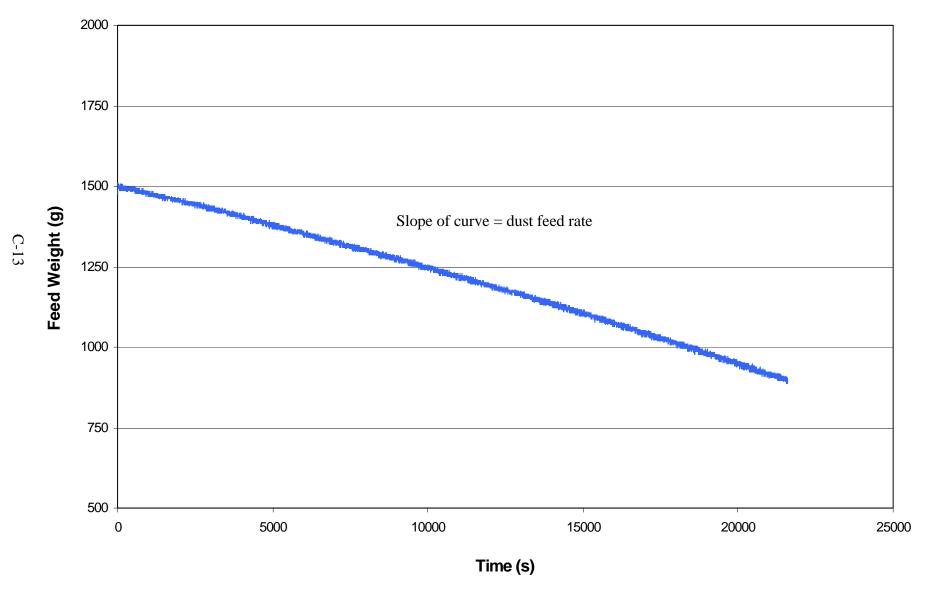


Figure C-3. Change in Pural NF dust scale reading with time during performance test run V006-3.

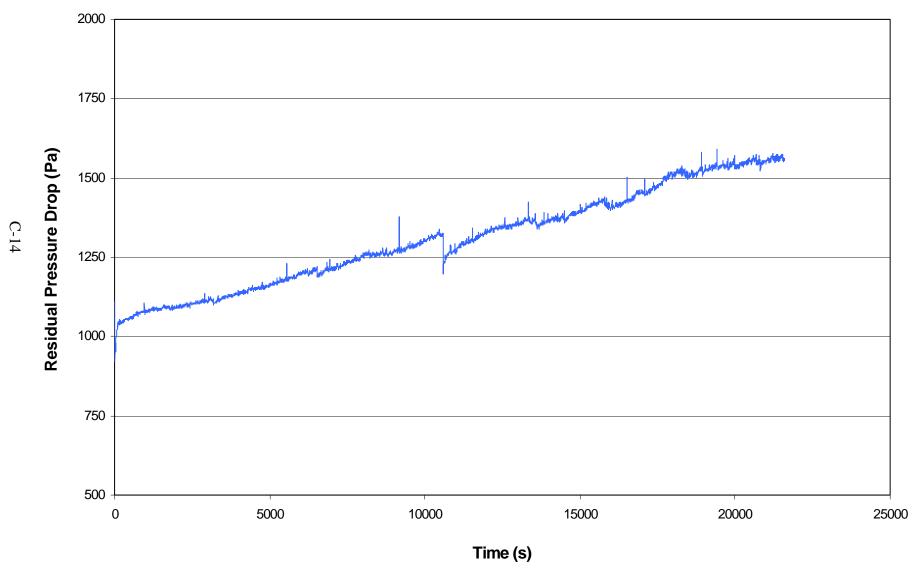


Figure C-4. Residual pressure drop across filter fabric during performance test run V006-3.

CONDITIONING TEST PERIOD

V006-4	NUMBER OF PULSES	10000
50-504-9	PULSE INTERVAL	3 s
Menardi-Criswell		
Pural NF	% Moisture	1.15 %WV
4/24/00		
	50-504-9 Menardi-Criswell Pural NF	50-504-9 PULSE INTERVAL Menardi-Criswell Pural NF % Moisture

TIME STARTED 10:13
TIME ENDED 18:33
TEST DURATION 500 min.

QA/QC DATA

Test Duration			Di	ust Feed (g)	Average	Gas Flow	(sm³/hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Ti	me	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	10:13	11:13	1383.5	1270.5	113.0	2.83	2.70	5.54	21.92	974.78	20.7	183.6
61-120	11:14	12:13	1270.5	1163.5	107.0	2.85	2.70	5.55	22.62	974.47	19.5	184.0
121-180	12:14	13:13	1163.5	1058.6	104.9	2.85	2.70	5.55	22.95	974.10	19.1	184.3
181-240	13:14	14:13	1058.6	956.6	102.0	2.85	2.70	5.54	23.31	972.91	18.6	184.7
241-300	14:14	15:13	956.6	852.9	103.7	2.85	2.70	5.54	23.46	972.71	18.9	184.7
301-360	15:14	16:13	852.9	748.8	104.0	2.85	2.70	5.54	23.55	972.35	19.0	184.8
361-420	16:14	17:13	748.8	651.8	97.0	2.85	2.70	5.54	23.74	971.65	17.7	185.0
421-480	17:14	18:13	651.8	549.2	102.6	2.85	2.70	5.54	23.76	971.36	18.7	185.1
441-500 *	17:34	18:33	617.0	516.2	100.9	2.85	2.70	5.54	23.71	971.25	18.4	185.1
AVERAGE (pe	er hour)				104.1	2.84	2.70	5.54	23.18	972.96	19.0	184.6
ACCEPTANCE	<u> </u>				100				25.5		18.4	180
					+/- 20				+/- 2.2		+/- 3.6	+/- 9.0

^{*} Test duration is a rolling 60 minute average. The last 60 minute frame was determined by couniting 60 minutes back from the last minute of the test.

DATA PROCESSING OPERATOR:

RECOVERY PERIOD

RUN ID.	V006-4	NUMBER OF PULSES	30
FABRIC DESIGNATION	50-504-9	AVG. PULSE INTERVAL	7 s
MANUFACTURER	Menardi-Criswell	AVG . RESIDUAL DP	903.43 Pa
DUST FEED	Pural NF	MAX. PRESSURE DROP	1000 Pa
DATE(S)	4/25/00		
TIME STARTED	7:10 *	% Moisture	1.2 %WV
TIME ENDED	7:13		
TEST DURATION	3 min.		

QA/QC DATA

Test Duration			Dı	ıst Feed	(g)	Average	Gas Flow	(sm³/hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	T	īme	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
1-3	7:11 *	7:13	605.2	599.4	5.8	2.82	2.71	5.52	21.5	967.85	1.1	184.9
AVERAGE (per	r hour)				104.2	2.82	2.71	5.52	21.5	967.85	19.1	184.9
ACCEPTANCE					100 +/- 20				25.5 +/- 2.2		18.4 +/- 3.6	180 +/- 9.0

^{*} First minute is not considered in calculations due to equipment stabilization.

|--|

PERFORMANCE TEST PERIOD

RUN ID. FABRIC DES MANUFACTO DUST FEED DATE(S) TIME START TIME ENDED TEST DURA	URER TED D TION	V006-4 50-504-9 Menardi-C Pural NF 4/25/00 7:30 13:30 360				AVG. P AVG. R CHANG	RESSURE	ERVAL DP		1356.57 719.4 1000	s Pa Pa		
Test Duration			יט	ıst Feed ((a)	Δverage	Gas Flow	/ (sm ³ /hr)	Sampling	Δva Temn	Δva Press	Dust Conc.	G/C Ratio
(min.)		me	Initial	Final	.9) Total	Raw	Clean	Total	(sm3/hr)	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	7:30	8:30	1566.8	1481.5	85.3	2.84	2.70	5.54	1.06	21.67	967.81	15.6	184.8
61-120	8:31	9:30	1481.5	1386.2	95.3	2.85	2.70	5.55	1.06	22.11	967.91	17.4	185.0
121-180	9:31	10:30	1386.2	1286.9	99.4	2.85	2.70	5.55	1.05	22.50	968.18	18.1	185.2
181-240	10:31	11:30	1286.9	1178.2	108.7	2.85	2.70	5.55	1.05	22.66	968.57	19.8	185.2
241-300	11:31	12:30	1178.2	1075.8	102.4	2.83	2.70	5.53	1.05	22.76	969.01	18.7	185.2
301-360	12:31	13:30	1075.8	980.0	95.8	2.83	2.70	5.53	1.05	22.86	969.48	17.5	185.2
AVERAGE (per hour)				97.8	2.84	2.70	5.54	1.05	22.43	968.49	17.9	185.1
ACCEPTANO	CE				100 +/- 20					25.5 +/- 2.2		18.4 +/- 3.6	180 +/- 9.0
GRAVIMETR	RIC DATA												
IMPACTOR S Backup Filte Total Mass G	r (PM 2.5)	ES	0.00003 0.00012	-		SAMPL Tare Ma Final Ma Mass G	ass		12.13 14.00 1.87	g	-		
OUTLET CO	NCENTRATI	ON											
Total Volume Mean Outlet Mean Outlet	Particle Cor		_	ıss		6.75 0.0000044 0.0000178	↓g/m³				DATA PRO	OCESSING (OPERATOR:

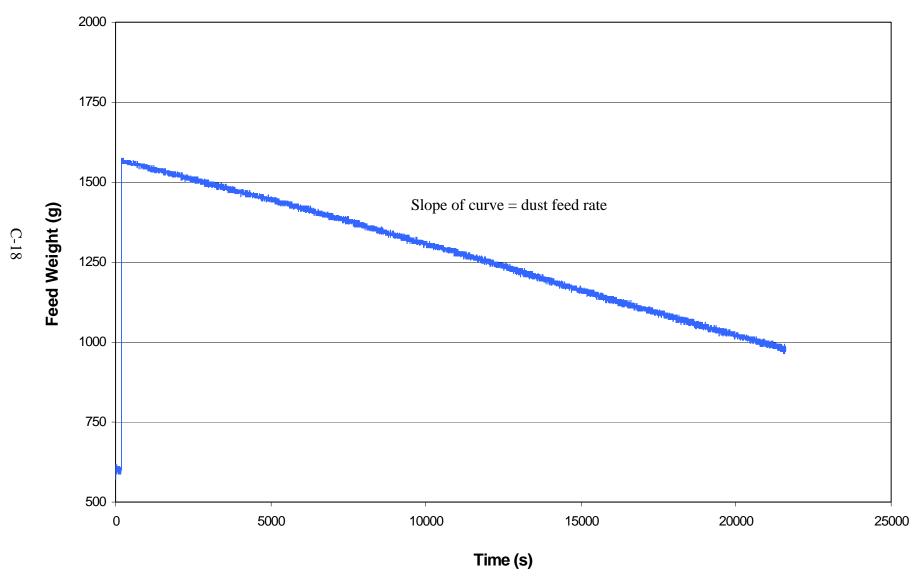


Figure C-5. Change in Pural NF dust scale reading with time during performance test run V006-4.

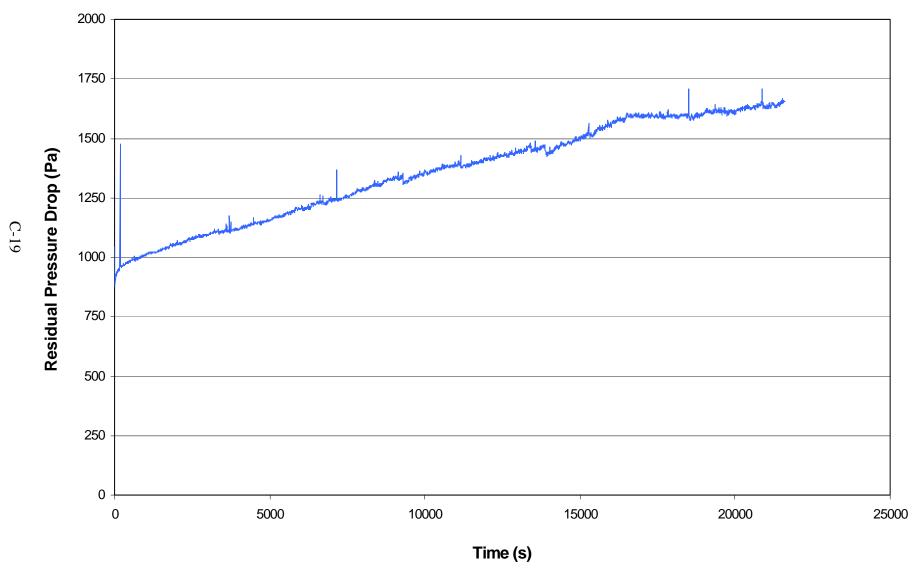


Figure C-6. Residual pressure drop across filter fabric during performance test run V006-4.

CONDITIONING TEST PERIOD

RUN ID.	V006-5	NUMBER OF PULSES	10000
FABRIC DESIGNATION	50-504-3	PULSE INTERVAL	3 s
MANITIEACTUDED	Monardi Criewall		

MANUFACTURER Menardi-Criswell

DUST FEED Pural NF % Moisture 1.32 %WV

DATE(S) 4/25/00
TIME STARTED 13:55
TIME ENDED 22:15
TEST DURATION 500 min.

QA/QC DATA

Test Duration			Dı	ust Feed ((g)	Average	Gas Flow	(sm ³ /hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Ti	ime	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
0-60	13:55	14:55	1651.9	1552.0	99.9	2.82	2.70	5.51	22.89	970.63	18.4	184.7
61-120	14:56	15:55	1552.0	1447.4	104.6	2.83	2.70	5.53	23.02	970.79	19.2	185.0
121-180	15:56	16:55	1447.4	1339.2	108.2	2.83	2.70	5.53	23.01	970.92	19.8	184.9
181-240	16:56	17:55	1339.2	1234.8	104.4	2.83	2.70	5.53	22.93	971.13	19.1	184.8
241-300	17:56	18:55	1234.8	1133.1	101.7	2.83	2.70	5.53	22.94	971.32	18.6	184.7
301-360	18:56	19:55	1133.1	1032.3	100.8	2.83	2.70	5.53	22.97	971.39	18.5	184.7
361-420	19:56	20:55	1032.3	931.3	101.0	2.83	2.70	5.53	22.90	972.04	18.5	184.5
421-480	20:56	21:55	931.3	837.6	93.7	2.83	2.70	5.53	22.82	973.21	17.2	184.2
441-500 *	21:16	22:15	904.5	804.0	100.5	2.83	2.70	5.53	22.73	973.64	18.4	184.1
AVERAGE (pe	er hour)				101.7	2.83	2.70	5.52	22.92	971.53	18.7	184.7
ACCEPTANCE	Ī				100				25.5		18.4	180
					+/- 20				+/- 2.2		+/- 3.6	+/- 9.0

^{*} Test duration is a rolling 60 minute average. The last 60 minute frame was determined by counting 60 minutes back from the last minute of the test.

DATA PROCESSING OPERATOR:

RECOVERY PERIOD

RUN ID.	V006-5	NUMBER OF PULSES	30
FABRIC DESIGNATION	50-504-3	AVG. PULSE INTERVAL	6 s
MANUFACTURER	Menardi-Criswell	AVG . RESIDUAL DP	1015.77 Pa
DUST FEED	Pural NF	MAX. PRESSURE DROP	1000 Pa
DATE(S)	4/26/00		
TIME STARTED	7:10 *	% Moisture	1.18 %WV
TIME ENDED	7:13		
TEST DURATION	3 min.		

QA/QC DATA

Test Duration			Dı	ıst Feed ((g)	Average	Gas Flow	(sm³/hr)	Avg. Temp	Avg Press	Dust Conc.	G/C Ratio
(min.)	Tin	ne	Initial	Final	Total	Raw	Clean	Total	(° C)	(mbar)	(g/dscm)	(m/h)
1-3	7:11 *	7:13	919.3	917.8	1.5	2.80	2.72	5.52	21.3	974.96	0.3	184.2
AVERAGE (pe	r hour)				27.3	2.80	2.72	5.52	21.3	974.96	5.0	184.2
ACCEPTANCE	Ē				100				25.5		18.4	180
					+/- 20				+/- 2.2		+/- 3.6	+/- 9.0

^{*} First minute is not considered in calculations due to equipment stabilization.

DATA PROCESSING OPERATOR:

PERFORMANCE TEST PERIOD

RUN ID. FABRIC DES MANUFACTI DUST FEED DATE(S) TIME START TIME ENDED TEST DURA	URER TED O TION	V006-5 50-504-3 Menardi- Pural NF 4/26/00 7:31 13:31 360	Criswell			AVG. PU AVG. RE CHANGI	RESSURE	ERVAL DP		1615.3 93 100	6 s		
QA/QC DATA					′ `			FL /	3/1 \		A D	D (0	0/0.5. ::
Test Duration	-	 .		ust Feed (erage Gas	•	•		p Avg Press		
(min.) 0-60	7:31	me 8:31	Initial 1568.5	Final 1479.7	Total 88.7	2.83	Clean 2.70	Total 5.53	Sampling 1.05	(° C) 21.57	(mbar) 975.21	(g/dscm) 16.2	(m/h) 183.2
61-120	8:32	9:31	1479.7	1386.1	93.6	2.84	2.70	5.54	1.05	22.01	975.21	17.1	183.6
121-180	9:32	10:31	1386.1	1287.9	98.2	2.84	2.70	5.54	1.05	22.44	975.47	18.0	183.8
181-240	10:32	11:31	1287.9	1184.5	103.3	2.84	2.70	5.54	1.05	22.82	975.48	18.9	184.1
241-300	11:32	12:31	1184.5	1088.0	96.5	2.84	2.70	5.54	1.05	23.17	975.23	17.6	184.3
301-360	12:32	13:31	1088.0	990.7	97.3	2.84	2.70	5.54	1.05	23.51	974.88	17.8	184.6
AVERAGE (per hour)				96.3	2.83	2.70	5.54	1.05	22.59	975.26	17.6	183.9
ACCEPTANG	CE				100 +/- 20					25.5 +/- 2.2		18.4 +/- 3.6	180 +/- 9.0
GRAVIMETR	RIC DATA												
IMPACTOR S Backup Filte Total Mass G	r (PM 2.5)	ES .	0.00012 0.00017	•		SAMPLE Tare Mas Final Ma Mass Ga	ISS		12.86 15.02 2.16	g	_		
OUTLET CO	NCENTRATI	ON								_	_		
Total Volume Sampled Mean Outlet Particle Concentration - PM 2.5 Mean Outlet Particle Concentration - Total Mass				ass	6.72 m ³ 0.000018 g/m ³ 0.000025 g/m ³						DATA PRO	OCESSING	OPERATOR:

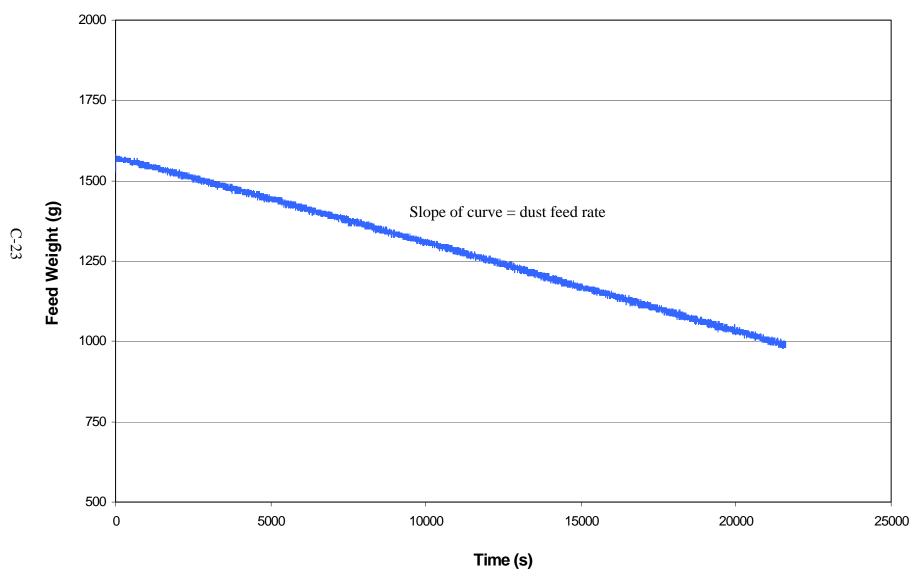


Figure C-7. Change in Pural NF dust scale reading with time during performance test run V006-5.

Figure C-8. Residual pressure drop across filter fabric during performance test run V006-5.