

Manufacturer: MeadWestvaco (MWV): Calmar Home & Garden Packaging SBU
Model: Infinity[®] HE
ASTM Type: IXG (1)

Description:

The package consists of a plastic one piece continuously threaded closure and a hose-end sprayer (Figure 1). The hose connection, which is continuously threaded, is on the right in Figure 1. The hooded dispersing element is on the left in Figure 1.



Figure 1

The dispersing element can be rotated from a fan spray position (Figure 2A) to a stream position (Figure 2B).



Figure 2A



Figure 2B

The hose-end sprayer closure is permanently attached to the container by continuous threading and engagement of matching ratchets on the closure and the two sets of ratchets on the container (see arrow to ratchets on the bottle and arrow to ratchets inside the closure in Figures 3A and 3B).

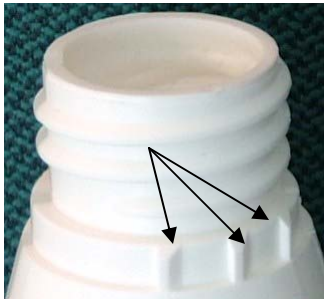


Figure 3A

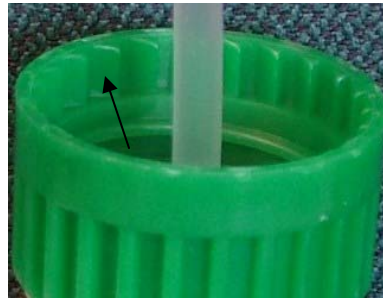


Figure 3B

The hose-end sprayer control valve has 3 positions, Off, Water, and On (Note markings have been highlighted for clarity in Figures 4A, 4B, and 4C). To operate the hose-end sprayer the child-resistant Lok-Tab is held down (see arrow in Figure 4A) while turning the control valve counterclockwise to the On position (Figure 4C). Product is dispensed when the control valve is in the On position. Similarly, only water is dispensed when the control valve is in the Water position (Figure 4B). The Off position on the control valve (Figure 4A) causes the child-resistant Lok-Tab (see arrow in Figure 4A) to lock into place and prevents the control valve from being turned.



Figure 4A



Figure 4B



Figure 4C

The instructions are (Figures 4A, 4B, and 4C)

OFF WATER ON

The following operating instructions appear on the package (Figure 5).



Figure 5