



**San Joaquin Valley**  
AIR POLLUTION CONTROL DISTRICT

# 2017 Air Monitoring Network Plan



**San Joaquin Valley Air Pollution Control District**

**2017 Air Monitoring Network Plan**

**June 28, 2017**

This page is intentionally blank.

## TABLE OF CONTENTS

The District's Core Values Exhibited in the Air Monitoring Network .....	vi
<b>EXECUTIVE SUMMARY .....</b>	<b>1</b>
<b>AIR MONITORING NETWORK PLAN REQUIREMENTS .....</b>	<b>3</b>
Monitoring Objectives, Site Types, and Spatial Scales .....	7
Meteorology .....	8
State of the Air Monitoring Network.....	8
<b>POLLUTANT MONITORING REQUIREMENTS .....</b>	<b>11</b>
Ozone .....	11
Photochemical Assessment Monitoring Stations .....	12
Nitrogen Dioxide.....	13
Carbon Monoxide.....	14
Sulfur Dioxide.....	15
Reactive Nitrogen Compounds (NO <sub>y</sub> ).....	16
Toxics.....	16
Detailed Site Information – Gaseous Monitors .....	17
Particulate Matter (PM) .....	19
Detailed Site Information – PM Monitors.....	20
PM Collocation Requirements.....	20
Public Review of Changes to the PM <sub>2.5</sub> Monitoring Network .....	21
PM <sub>10</sub> Monitoring Requirements.....	21
PM <sub>2.5</sub> Monitoring Requirements.....	23
PM <sub>2.5</sub> Chemical Speciation Site Requirements .....	25
Lead.....	27
NCore.....	28
Non-EPA Federal Monitors .....	29
<b>IMPROVEMENTS AND PLANNED CHANGES TO THE DISTRICT'S AIR MONITORING NETWORK .....</b>	<b>34</b>
Planned Improvements and Other Changes Scheduled for 2017/2018 .....	36
Oildale.....	36
Progress report on Bakersfield-Westwind Near-Road NO <sub>2</sub> site .....	37
Further Deployment of Teledyne 602 Units in the Network.....	37
All other Sites .....	37
<b>DATA SUBMISSION REQUIREMENTS .....</b>	<b>40</b>
<b>ACRONYMS AND ABBREVIATIONS .....</b>	<b>41</b>



## **APPENDICES**

Appendix A: Monitoring Site Descriptions

Appendix B: Detailed SJV Monitoring Site Information

Appendix C: San Joaquin Valley Air Pollution Control District Notice of Public Inspection Period on the 2017 Air Monitoring Network Plan

Appendix D: Comments and Responses

## LIST OF FIGURES

Figure 1	Map of Air Monitoring Sites in the San Joaquin Valley .....	2
----------	---	---

## LIST OF TABLES

Table 1	Types of Air Monitoring Stations and Monitors .....	3
Table 2	San Joaquin Valley Areas of Representation .....	5
Table 3	Site Identification .....	5
Table 4	San Joaquin Valley 2016 Population .....	7
Table 5	Parameters Monitored in the San Joaquin Valley .....	9
Table 6	San Joaquin Valley Stations Monitoring Meteorology .....	10
Table 7	SLAMS Minimum Ozone Monitoring Requirements .....	11
Table 8	8–Hour Ozone Requirements for the San Joaquin Valley .....	12
Table 9	San Joaquin Valley PAMS Sites .....	13
Table 10	San Joaquin Valley’s Populations Weighted Emissions Index for 2016 .....	15
Table 11	Gaseous Monitors .....	17
Table 12	Gaseous Monitors – Monitor Type .....	18
Table 13	Minimum PM10 Monitoring Requirements .....	21
Table 14	PM10 Monitoring requirements for the Valley .....	22
Table 15	24-Hour PM10 design values at each site* .....	22
Table 16	Minimum PM2.5 Monitoring Requirements .....	23
Table 17	PM2.5 Monitoring Requirements for the Valley .....	23
Table 18	24-Hour and Annual PM <sub>2.5</sub> Maximum Design Values .....	24
Table 19	PM2.5 Speciation Monitors .....	25
Table 20	PM Monitors .....	26
Table 21	PM Monitors – Monitor Type .....	27
Table 22	Fresno-Garland NCore Site .....	28
Table 23	Non–EPA Federal Monitors .....	29
Table 24	SLAMS – Site Type .....	29
Table 25	SLAMS – Spatial Scale .....	30
Table 26	SLAMS – Basic Monitoring Objective .....	31
Table 27	SLAMS – Current Sampling Frequency .....	32
Table 28	SPM – Site Type .....	33
Table 29	SPM – Spatial Scale .....	34
Table 30	SPM – Basic Monitoring Objective .....	34
Table 31	SPM – Current Sampling Frequency .....	34
Table 32	Summary of Proposed Changes to the Air Monitoring Network .....	38

## **The District's Core Values Exhibited in the Air Monitoring Network**

### **\* Protection of Public Health \***

The District uses data collected from the air monitoring network to provide real-time air quality data to the public through the real-time air advisory network (RAAN), generate daily air quality forecasts, and when needed, issue health advisories. The District also uses data collected from the Valley's air monitoring network as the basis for long-term attainment strategies and to track progress towards meeting federal health-based air quality standards.

### **\* Active and effective air pollution control efforts with minimal disruption to the Valley's economic prosperity \***

The District uses air monitoring data to help establish strategies for reaching attainment of federal health-based air quality standards.

### **\* Outstanding Customer Service \***

#### **\* Accountability to the public \***

The District's website provides easy public access to data from the Valley's real-time air monitors, and through the RAAN system, provides notifications to the public when air quality reaches unhealthy levels. The public can also access historical air quality information through the District's website.

### **\* Open and transparent public processes \***

In addition to making air quality data available in real-time, the District uses air quality data in a variety of publicly available documents and reports. The District also conducts a public review period for annual monitoring network plans.

### **\* Respect for the opinions and interest of all Valley residents \***

The District has actively made daily air quality information available to Valley residents in a variety of formats, including the District website, the RAAN system, the daily air quality forecast, and the media. The District considers public interests in establishing new air monitoring stations.

### **\* Ingenuity and innovation \***

The District strives to use new and improved air monitoring techniques and equipment as approved by the EPA. The District uses the latest science when considering locations for air monitoring stations, and in turn, the data collected from the air monitoring network contributes to ongoing scientific evaluations.

### **\* Continuous improvement \***

Through the annual air monitoring network plan, the District evaluates the air monitoring network for opportunities for better data collection and greater efficiency. Throughout the year, the District continually seeks out opportunities to improve the air monitoring network and its service to the public while meeting federal requirements.

### **\* Recognition of the uniqueness of the San Joaquin Valley \***

The San Joaquin Valley is an expansive and diverse area. The District strives to site its air monitoring stations in locations that represent each region of the Valley.

### **\* Effective and efficient use of public funds \***

The District makes the most of limited resources by structuring the air monitoring network in a way that optimizes personnel time and funding for instruments. The result is a robust air monitoring network that helps the Valley reach its air quality goals without unnecessary expenditures.

This page is intentionally blank.

## EXECUTIVE SUMMARY

The San Joaquin Valley Air Pollution Control District (SJVAPCD or District) operates an extensive network of air quality monitors throughout the San Joaquin Valley (Valley) to support its mission of improving and protecting public health. District staff uses the hourly readings from real-time monitors to communicate the state of the air quality to Valley residents. Through programs and venues such as the Real-Time Air Advisory Network (RAAN), the daily air quality forecast, the District website, and Valley media, residents are able to obtain air quality information that can help them with their activity planning. The District also uses real-time air quality data to manage prescribed burning, agricultural burning, and residential wood combustion to ensure these activities do not result in adverse air quality impacts.


As part of the District's long-term efforts to improve public health, air monitors collect data that is rigorously analyzed by laboratory technicians and District staff. This monitoring data determines the Valley's air quality and is fundamental in the Valley's effort to improve air quality and achieve attainment of EPA's health-based ambient air quality standards as quickly as possible.

The San Joaquin Valley covers an area of 23,490 square miles, and is home to one of the most challenging air quality problems in the nation. The Valley is designated nonattainment for federal PM<sub>2.5</sub> and ozone standards, and is in attainment of the federal standards for Lead (Pb), Nitrogen Dioxide (NO<sub>2</sub>), Sulfur Dioxide (SO<sub>2</sub>), and Carbon Monoxide (CO). In addition, the Valley is designated as an attainment/maintenance area for PM<sub>10</sub>. The Valley is home to 4 million residents, and includes several major metropolitan areas, vast expanses of agricultural land, industrial sources, highways, and schools. To address the air quality needs of this expansive and diverse region, the District maintains a robust air monitoring program that meets federal requirements while providing vital information to the public.

The air monitoring network in the Valley also includes air monitoring stations that are managed and operated by the California Air Resources Board (CARB) and the National Park Service. Additionally, there are three tribal air monitoring stations operating in the Valley. The Tachi Yokut Tribe operates a monitoring station at Santa Rosa Rancheria located in Kings County, the Monache Tribe and Foothill Yokut Indians operate the Table Mountain air monitoring station in Fresno County, and the Chukchansi Indians of California operate a monitoring station at the Picayune Rancheria located in Madera County. Since the tribal monitors are operated under the Tribal Authority Rule which is essential to tribal implementation of the Clean Air Act, and is not part of the District's jurisdiction, detailed site information for tribal monitors will not be provided in this plan.

A map of the air monitoring stations in the San Joaquin Valley is shown in Figure 1.

Figure 1: Map of Air Monitoring Sites in the San Joaquin Valley

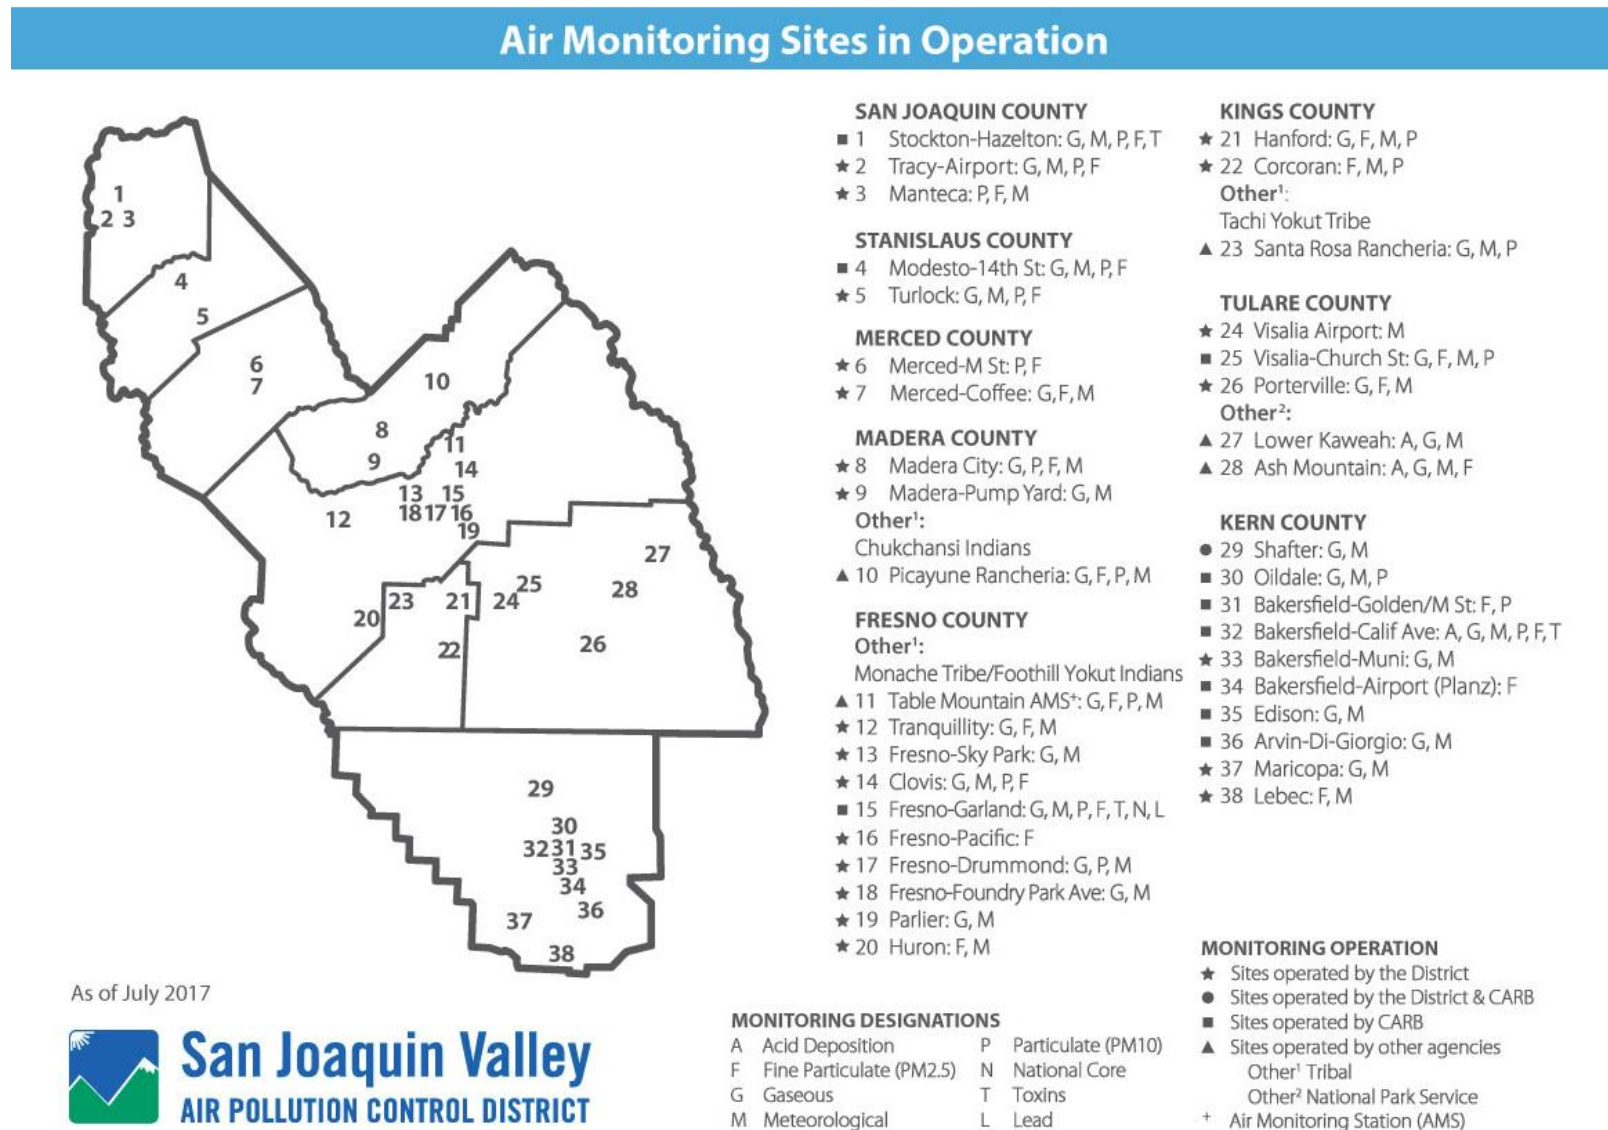

## AIR MONITORING NETWORK PLAN REQUIREMENTS

As specified in 40 CFR (Code of Federal Regulations) 58.10, and as required as a part of the District's EPA 105 Grant, this air monitoring network plan describes the current state of the District's monitoring network and changes that are planned for the network. The annual monitoring network plan is updated and submitted to the EPA Regional Administrator each year, and is made available for public inspection for at least 30 days prior to submission to EPA. Air monitoring network plans provide the establishment and maintenance of air monitoring networks that may include the types of stations and monitors listed in Table 1.

**Table 1 Types of Air Monitoring Stations and Monitors**

Abbreviation	Full Name	Description
ARM	Approved Regional Method	A method that has been approved within a specific region for comparison to federal air quality standards. <i>Currently, there are no ARM monitors in the San Joaquin Valley.</i>
FEM	Federal Equivalent Method	These monitors are considered to be equivalent to FRM monitors for the purpose of determining compliance with EPA's health-based air quality standards.
FRM	Federal Reference Method	EPA defines how these monitors are to work, how they are to be engineered, and how they are to measure pollutants. These monitors are used to determine compliance with EPA's health-based air quality standards.
NCore	National Core	Multipollutant monitoring stations; in California, these are operated by CARB.
PAMS	Photochemical Assessment Monitoring Station	VOC (volatile organic compounds) speciation sites used in serious, severe, or extreme ozone nonattainment areas for precursor evaluation.
SLAMS	State and Local Air Monitoring Station	Monitoring sites that are used for determinations of compliance with federal air quality standards, though they may be used for other purposes as well.
SPM	Special Purpose Monitor	Not included when showing compliance with the minimum air monitoring requirements; an example might include a temporary monitoring station set up in an area to measure short term air quality impacts of a source. Data collected from an SPM can be used for Regulatory purposes if the monitor has been operational for two years and if the monitor is an ARM, FEM, or FRM.
STN	Speciated Trends Network	PM <sub>2.5</sub> speciation stations that provide chemical speciation data of PM.



The monitoring network plan should include a statement of purpose for each monitor and evidence that siting and operation of each monitor meets the requirements of appendices A, C, D, and E of 40 CFR Part 58. The plan must contain the following information for each existing and proposed site (40 CFR 58.10 (b)):

- The MSA, CBSA, CSA, or other area represented by the monitor. MSA, CBSA, and CSA are statistical-based definitions for metropolitan areas provided by the Office of Management and Budget and the Census Bureau (see Table 2):
  - MSA: Metropolitan statistical area
  - CBSA: Core-based statistical area
  - CSA: Combined statistical area
- Air quality system (AQS) site identification number (see Table 3).
- Location: Street address and geographical coordinates (see Appendix B).
- Sampling and analysis methods for each measured parameter (see Appendix B).
- Operating schedules for each monitor (see Appendix B).
- Monitoring objective and spatial scale of representativeness for each monitor (as defined in Appendix D to 40 CFR 58) (see Appendix B).
- Any proposals to remove or move a monitoring station within 18 months of a plan submittal. Any proposed additions and discontinuations of SLAMS monitors are subject to approval according to 40 CFR 58.14 (see *Planned Changes* section).

There are several network plan requirements that pertain specifically to PM<sub>2.5</sub> monitoring:

- The monitoring network plan must identify which sites are suitable and which are not suitable for comparison against the annual PM<sub>2.5</sub> national ambient air quality standards (NAAQS) as described in 40 CFR 58.30 (see *PM<sub>2.5</sub> Monitors* section).
- The plan must also document how the District provides for public review of changes to the PM<sub>2.5</sub> monitoring network when the change impacts the location of a violating PM<sub>2.5</sub> monitor, or the creation/change to a community monitoring zone.
- The District should submit any public comments received on PM<sub>2.5</sub> monitoring changes in the submittal of the network plan.
- On March 18, 2013, EPA finalized the rule to revoke the term “population-oriented.” The final rule states that PM<sub>2.5</sub> monitors at neighborhood scale or larger, or smaller scales that represent many locations in the same CBSA, are the only monitors representative of “area-wide” air quality that can be compared to the PM<sub>2.5</sub> NAAQS.

**Table 2 San Joaquin Valley Areas of Representation**

<b>TITLE</b>	<b>CODE</b>
<b>Combined Statistical Area (CSA)</b>	<b>Combined Statistical Area (CSA) Code</b>
Fresno–Madera	260
<b>Metropolitan Statistical Area (MSA)</b>	<b>Core–Based Statistical Area (CBSA) Code</b>
Stockton–Lodi	44700
Modesto	33700
Merced	32900
Madera	31460
Fresno	23420
Hanford–Corcoran	25260
Visalia–Porterville	47300
Bakersfield <sup>1</sup>	12540

<sup>1</sup> Monitors from both the District and the Eastern Kern County Air Pollution Control District can be counted when determining compliance with minimum monitoring requirements for the Bakersfield CBSA. However, only monitors located within the District's boundaries are included in this network plan.

**Table 3 Site Identification**

<b>MSA/CBSA: Stockton-Lodi</b>		
<b>County: San Joaquin</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Manteca	06-077-2010	SJVAPCD
Stockton–Hazelton	06-077-1002	CARB
Tracy–Airport	06-077-3005	SJVAPCD
<b>MSA/CBSA: Modesto</b>		
<b>County: Stanislaus</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Modesto–14th St	06-099-0005	CARB
Turlock	06-099-0006	SJVAPCD
<b>MSA/CBSA: Merced</b>		
<b>County: Merced</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Merced–Coffee	06-047-0003	SJVAPCD
Merced–M St	06-047-2510	SJVAPCD
<b>MSA/CBSA: Madera</b>		
<b>County: Madera</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Madera–City	06-039-2010	SJVAPCD
Madera–Pump Yard	06-039-0004	SJVAPCD

**Table 3 Site Identification (continued)**

<b>MSA/CBSA: Fresno</b>		
<b>County: Fresno</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Clovis–Villa	06-019-5001	SJVAPCD
Fresno–Drummond	06-019-0007	SJVAPCD
Fresno–Garland	06-019-0011	CARB
Fresno–Foundry	06-019-2016	SJVAPCD
Fresno–Pacific	06-019-5025	SJVAPCD
Fresno–Sky Park	06-019-0242	SJVAPCD
Huron	06-019-2008	SJVAPCD
Parlier	06-019-4001	SJVAPCD
Tranquillity	06-019-2009	SJVAPCD
<b>MSA/CBSA: Hanford–Corcoran</b>		
<b>County: Kings</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Corcoran–Patterson	06-031-0004	SJVAPCD
Hanford–Irwin	06-031-1004	SJVAPCD
<b>MSA/CBSA: Visalia–Porterville</b>		
<b>County: Tulare</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Porterville	06-107-2010	SJVAPCD
Sequoia–Ash Mountain	06-107-0009	National Park Service
Sequoia–Lower Kaweah	06-107-0006	National Park Service
Visalia–Airport	06-107-3000	SJVAPCD
Visalia–Church St	06-107-2002	CARB
<b>MSA/CBSA: Bakersfield</b>		
<b>County: Kern (Valley Portion)</b>		
<b>Site Name</b>	<b>AQS ID</b>	<b>Operating Agency</b>
Arvin–Di Giorgio	06-029-5002	CARB
Bakersfield–Golden / M St	06-029-0010	SJVAPCD
Bakersfield–California	06-029-0014	CARB
Bakersfield–Muni	06-029-2012	SJVAPCD
Bakersfield–Airport (Planz)	06-029-0016	CARB
Edison	06-029-0007	CARB
Lebec	06-029-2009	SJVAPCD
Maricopa	06-029-0008	SJVAPCD
Oildale	06-029-0232	CARB
Shafter	06-029-6001	Shared <sup>1</sup>

<sup>1</sup> Site operated by CARB and SJVAPCD.

**Table 4 San Joaquin Valley 2016 Population**

<b>County</b>	<b>Total County Population<sup>±</sup></b>	<b>Major Urban Area Pop &gt; 100,000</b>	<b>Urban Area Pop &lt; 100,000 and &gt; 50,000</b>
San Joaquin	733,383	Stockton	Lodi, Manteca, Tracy
Stanislaus	540,214	Modesto	Turlock
Merced	271,579	—	Merced
Madera	155,349	—	Madera
Fresno	984,541	Fresno, Clovis	—
Kings	150,373	—	Hanford
Tulare	466,339	Visalia	Porterville, Tulare
Kern (Valley Portion)	753,531 <sup>*</sup>	Bakersfield	Delano
<i>Kern (Entire County)</i>	<i>886,507</i>	<i>Bakersfield</i>	<i>Delano</i>
<b>San Joaquin Valley Total</b>		<b>4,055,309</b>	

<sup>\*</sup>Population estimate for Kern County (Valley Portion) was calculated using census tract data for the population living within the District's boundaries. The San Joaquin Valley Total includes the Kern (Valley Portion) population and not the Kern (Entire County) population.

<sup>±</sup>Data from California Department of Finance E-1 Population Estimates for Cities, Counties and the State, January 1, 2016, Released May 1, 2016

### **Monitoring Objectives, Site Types, and Spatial Scales**

Three **basic monitoring objectives** that define the purpose of each analyzer are identified in 40 CFR Part 58 Appendix D:

- Provide air pollution data to the general public in a timely manner (**timely/public**).
- Support compliance with ambient air quality standards and emissions strategy development (**NAAQS comparison**).
- Support for air pollution research studies (**research support**).

**Site types** meet the objectives that define what the monitor is measuring. Some of the general monitoring site types identified in 40 CFR Part 58 Appendix D include:

- Sites located to determine the **highest concentrations** in the area covered by the network.
- **Population exposure** sites to measure typical concentrations in areas of high population density.
- **Source oriented** sites to determine the impact of significant sources or source categories on air quality.
- **General Background** sites determine background concentration levels.
- **Regional transport** sites located to determine the extent of regional pollutant transport among populated areas and in support of secondary standards
- Sites located to measure air pollution impacts on visibility, vegetation damage, or other welfare-related impacts.

Scales of spatial representativeness are described in terms of physical dimensions of the air parcel or zone where air quality is expected to be reasonably consistent around the monitor. The monitor thus represents that area, not just the point of the monitor. The following **spatial scales** are identified in 40 CFR Part 58 Appendix D:

- **Microscale:** An area ranging from several meters up to about 100 meters.
- **Middle scale:** An area covering between about 100 meters to 0.5 kilometers.
- **Neighborhood scale:** Covering an area between 0.5 and 4.0 kilometers in range.
- **Urban scale:** Covering an area of city-like dimensions, from about 4 to 50 kilometers.
- **Regional scale:** Covering a rural area of reasonably homogeneous geography without large sources, extending from tens to hundreds of kilometers.

New monitoring stations and new monitors that are intended to be compared to the NAAQS must meet EPA siting criteria. Some sites may be appropriate for monitoring all air pollutants, while other sites may be appropriate for a particular pollutant. The District balances a wide range of pollutant siting criteria, spatial scales, monitoring objectives, and practical concerns as it plans and operates its monitoring network. Table 5 summarizes the parameters measured at each air monitoring site in the San Joaquin Valley.

## **Meteorology**

A variety of meteorological parameters are measured for various District programs affected by weather. Such programs include air quality forecasting, PAMS, exceptional events, long-term planning, and pollutant trend assessment. These activities help protect public health and have made the public and media more aware of air quality and what can be done to reduce air pollution. See Table 6 for the meteorological parameters measured in the Valley.

## **State of the Air Monitoring Network**

This Network Plan summarizes the state of the District's air monitoring network during 2016. Additionally, changes that the District may initiate through December 2017 are described in the Improvements and Planned Changes section below.

Table 5 Parameters Monitored in the San Joaquin Valley

Site Name	Ozone	PM2.5	PM10	PM <sub>10-2.5</sub>	NO <sub>2</sub>	CO	SO <sub>2</sub>	NMH	Speciated VOC	NO <sub>y</sub>	PM2.5 Speciation	Lead	Toxics	RASS*	Meteorology
Stockton–Hazelton	✓	✓	✓		✓	✓							✓		✓
Manteca		✓	✓												✓
Tracy–Airport	✓	✓	✓		✓									✓	✓
Modesto–14th St	✓	✓	✓			✓					✓				✓
Turlock	✓	✓	✓		✓										✓
Merced–Coffee	✓	✓			✓										✓
Merced–M St		✓	✓												
Madera–City	✓	✓	✓												✓
Madera–Pump Yard	✓				✓			✓	✓						✓
Tranquillity	✓	✓													✓
Fresno–Sky Park	✓				✓										✓
Clovis–Villa	✓	✓	✓		✓	✓		✓	✓						✓
Fresno–Garland	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓		✓
Fresno–Pacific		✓													
Fresno–Foundry					✓										✓
Fresno–Drummond	✓		✓		✓										✓
Parlier	✓				✓			✓	✓						✓
Huron		✓													✓
Hanford–Irwin	✓	✓	✓		✓										✓
Corcoran–Patterson		✓	✓												✓
Visalia–Airport														✓	✓
Visalia–Church St	✓	✓	✓		✓						✓				✓
Sequoia–Lower Kaweah	✓														✓
Sequoia–Ash Mountain	✓	✓													✓
Porterville	✓	✓													✓
Shafter	✓				✓			✓	✓						✓
Oildale	✓		✓												✓
Bakersfield–Golden / M St		✓	✓												
Bakersfield–California	✓	✓	✓		✓						✓		✓		✓
Edison	✓				✓										✓
Bakersfield–Muni	✓				✓	✓		✓	✓						✓
Bakersfield–Airport (Planz)		✓													
Arvin–Di Giorgio	✓														✓
Maricopa	✓														✓
Lebec		✓													✓

\* Radio acoustic sounding system (RASS)

**Table 6 San Joaquin Valley Stations Monitoring Meteorology**

Site Name	Wind Speed	Wind Direction	Outdoor Temperature	Relative Humidity	Barometric Pressure	Solar Radiation
Stockton–Hazelton	✓	✓	✓	✓		
Manteca	✓	✓	✓		✓	
Tracy–Airport	✓	✓	✓		✓	
Modesto–14th St	✓	✓	✓	✓		
Turlock	✓	✓	✓		✓	
Merced–Coffee	✓	✓	✓			
Madera–City	✓	✓	✓	✓	✓	✓
Madera–Pump Yard	✓	✓	✓	✓	✓	✓
Tranquillity	✓	✓	✓		✓	
Fresno–Sky Park	✓	✓	✓			
Clovis–Villa	✓	✓	✓	✓	✓	✓
Fresno–Garland	✓	✓	✓	✓	✓	
Fresno–Foundry	✓	✓	✓		✓	
Fresno–Drummond	✓	✓	✓		✓	
Parlier	✓	✓	✓	✓	✓	✓
Huron					✓	
Hanford–Irwin	✓	✓	✓		✓	
Corcoran–Patterson	✓	✓	✓		✓	
Visalia–Airport	✓	✓	✓	✓	✓	✓
Visalia–Church St	✓	✓	✓	✓		
Sequoia–Lower Kaweah	✓	✓	✓	✓		✓
Sequoia–Ash Mountain	✓	✓	✓	✓		✓
Porterville	✓	✓	✓		✓	
Shafter	✓	✓	✓	✓	✓	✓
Oildale	✓	✓	✓	✓		
Bakersfield–California	✓	✓	✓	✓		✓
Edison	✓	✓	✓	✓		
Bakersfield–Muni	✓	✓	✓	✓	✓	✓
Arvin–Di Giorgio	✓	✓	✓	✓		
Maricopa	✓	✓	✓		✓	
Lebec	✓	✓	✓		✓	



## POLLUTANT MONITORING REQUIREMENTS

### Ozone

Ozone is formed when its precursors (oxides of nitrogen (NO<sub>x</sub>) and volatile organic compounds (VOC)) chemically react in the presence of heat and sunlight. The Valley's topography, high temperatures, subsidence inversions, and light winds are conducive to the formation of elevated ozone levels. Furthermore, winds (at ground level or at higher altitudes) transport pollutants from other basins into the Valley, within the Valley to areas downwind, and from the Valley into other regions.

As specified in Table D–2 of Appendix D to Part 58, ozone monitoring site requirements are based on MSA population and design values (see Table 7). Table 8 shows that the Valley's ozone monitoring network meets these requirements. Sites are intended to represent population exposures and maximum concentrations, so most ozone monitors are representative of neighborhood and regional scales. All of the SLAMS ozone analyzers in the District's network are operated in compliance with 40 CFR Part 58 Appendix A and Appendix E and are comparable to the ozone NAAQS. The Valley's SLAMS ozone monitors are continuous analyzers that detect ozone through ultraviolet absorption. As continuous devices, these monitors meet the "Timely/Public" objective, providing District staff with the data used in Air Quality Index (AQI) forecasting and reporting.

**Table 7 SLAMS Minimum Ozone Monitoring Requirements**  
(Table D–2 of Appendix D to Part 58)

MSA population, based on latest available census figures	Number of monitors required if:	
	Most recent 3–year design value concentrations $\geq$ 85% of any ozone NAAQS	Most recent 3–year design value concentrations <85% of any ozone NAAQS
> 10 million	4	2
4 – 10 million	3	1
350,000 – < 4 million	2	1
50,000 – < 350,000	1	0

**Table 8 8–Hour Ozone Requirements for the San Joaquin Valley**

Metropolitan Statistical Area (MSA)	2016 Population	Highest 2016 Ozone Design Value in MSA (ppb)	≥85% of 2016 ozone NAAQS (70 ppb)	Number of SLAMS stations required	SLAMS stations in MSA
Stockton-Lodi	733,383	79	Yes	2	2
Modesto	540,214	83	Yes	2	2
Merced	271,579	82	Yes	1	1
Madera	155,349	83	Yes	1	2
Fresno	984,541	94	Yes	2	5
Hanford–Corcoran	150,373	84	Yes	1	1
Visalia–Porterville	466,339	89	Yes	2	2
Bakersfield	753,531*	90	Yes	2	7

\* Population estimate for Kern County (Valley Portion) was calculated using census tract data for the population living within the District's boundaries.

### Photochemical Assessment Monitoring Stations

The monitoring objective of Photochemical Assessment Monitoring Stations (PAMS) is “research support”. Federal regulations (Clean Air Act Section 182 and 40 CFR 58) require serious, severe, and extreme ozone nonattainment areas to have PAMS sites to take speciated measurements of ozone precursors and allow for better understanding of the effect of precursors, control measures, and photochemistry on ozone formation. PAMS sites measure ozone, NO<sub>x</sub>, total– and speciated–VOC, CO, and meteorology concurrently. Although the Valley does not exceed federal or state standards for NO<sub>2</sub>, NO<sub>x</sub> reductions contribute to air quality improvement for both ozone and PM.

There are four classifications of PAMS sites:

- Type 1: **Background sites** upwind of urban areas, where ozone concentrations are presumed not to be influenced by nearby urban emissions.
- Type 2: **Maximum ozone precursor emissions sites**, typically located in an urban center, where emissions strengths are the greatest.
- Type 3: **Maximum ozone concentration sites**, intended to show the highest ozone concentrations.
- Type 4: **Downwind ozone monitoring sites**, intended to capture concentrations of transported ozone and precursor pollutants, and determine possible areas from which most of the transport may originate. Type 4 sites are currently not required for the San Joaquin Valley.

As shown in Table 9, the District has a total of six PAMS sites configured as two networks, one for the Fresno MSA and one for the Bakersfield MSA. In May 2016, the EPA approved the relocation of the ozone SLAMS monitor formerly at Arvin-Bear Mountain to the Arvin-Di Giorgio location in Kern County. Additionally, CARB has begun the process of building a permanent shelter that should have enough space to

accommodate all of the PAMS equipment intended for the site. It should be noted that, in lieu of upcoming changes to PAMS program requirements, plans to continue PAMS monitoring at Arvin are pending (see *Planned Changes/Improvements* section of this document).

Every year the PAMS program operates speciated VOC from June 1 through August 31 on a 1 in 3 day sampling schedule. At least four, three-hour integrated samples are collected each sampling day, which is referred to as a “Trend Day.” However, additional samples are collected on “Episode Days,” days that are forecasted to have high ozone concentrations. The goal is to sample on three to five multi-day episodes in an ozone season. All other PAMS parameters: CO, NO<sub>x</sub>, NO<sub>2</sub>, NO, ozone, NMOC, and meteorological equipment operate on an hourly basis year round.

**Table 9 San Joaquin Valley PAMS Sites**

<b>Fresno MSA</b>	Madera–Pump Yard	Type 1: Upwind/Background site
	Clovis–Villa	Type 2: Maximum precursor emissions
	Parlier	Type 3: Maximum ozone concentrations
<b>Bakersfield MSA</b>	Shafter	Type 1: Upwind/Background site
	Bakersfield–Muni	Type 2: Maximum precursor emissions
	Arvin*	Type 3: Maximum ozone concentrations

\* PAMS equipment for the Type 3 site at the Arvin–Di Giorgio site may be installed when space becomes available.

## Nitrogen Dioxide

In 2010, EPA retained the annual average NO<sub>2</sub> standard of 53 parts per billion (ppb), and established a new 1-hour NO<sub>2</sub> standard at the level of 100 ppb. Recognizing that the current NO<sub>2</sub> network is not adequate for fully assessing compliance with the new NAAQS, EPA finalized a Three-Tier Network design that will represent NO<sub>2</sub> concentrations that occur near freeways, urban areas, and locations aimed at protecting susceptible and vulnerable communities. Per 40 CFR Part 58, the Three-Tier Network design is comprised of:

- (1) One monitor that represents highest NO<sub>2</sub> exposure with a neighborhood scale or larger in CBSAs with more than 1,000,000 people.

Even though the District is not required to have an area-wide NO<sub>2</sub> monitor, the District operates an extensive NO<sub>2</sub> monitoring network consisting of 16 monitors, including one near-road NO<sub>2</sub> monitor in Fresno (with a second being constructed in Bakersfield). The District locates NO<sub>2</sub> analyzers as required at PAMS sites and generally collocates NO<sub>2</sub> analyzers wherever an ozone monitor is required. Currently, 15 of the District’s NO<sub>2</sub> monitors are located accordingly and indicate that the District has low NO<sub>2</sub> levels that would be in compliance with both the NO<sub>2</sub> standards if the site met NAAQS siting criteria. Because these measurements are low and traffic volumes are also low when compared to other areas of the state, the District anticipates meeting

the hourly standard once all of the near-road NO<sub>2</sub> monitors are added to the network and are collecting data.

- (2) Near-road monitoring at locations of expected maximum 1-hour NO<sub>2</sub> concentrations near heavily trafficked roads in urban areas.

On December 30, 2016, EPA finalized the revision to the Near-road NO<sub>2</sub> minimum monitoring requirements. Thus, per Section 4 of Appendix D in 40 CFR Part 58, one microscale near-road monitor is required in each CBSA with a population of 1,000,000 or more and must be located near a major road segment with a high annual average daily truck traffic (AADTT) count. An additional near-road monitor is required in CBSAs with populations of 2,500,000 or more; or in CBSAs with populations of 1,000,000 or more that have one or more road segments with 250,000 or more AADTT counts. Although the District is currently not required to have a near-road NO<sub>2</sub> monitor, it is moving forward with establishing near-road NO<sub>2</sub> monitoring stations in Fresno and Bakersfield as both of the CBSAs are nearing populations of 1,000,000. The near-road air monitoring station in Fresno became operational in January 2016, and the Bakersfield near-road NO<sub>2</sub> air monitoring station is currently being built and will become operational by the end of 2017.

- (3) A NO<sub>2</sub> network consisting of 40 monitors designed by the Regional Administrators to protect susceptible and vulnerable communities.

The third network, the Regional Administrator Required Monitoring Network (RA40) will consist of 40 NO<sub>2</sub> sites located throughout the United States and their locations will be determined by the Regional Administrators. These 40 sites would be in addition to the minimum NO<sub>2</sub> monitoring requirements. EPA Region 9 has asked the District to choose two sites for RA40 purposes. Currently, Parlier is designated as an RA40 site in the Fresno CBSA, and Bakersfield-Muni is designated as the RA40 site in the Bakersfield CBSA. These sites are located in towns with susceptible and vulnerable populations. In addition, they are downwind from urban areas.

## **Carbon Monoxide**

On August 12, 2011 EPA issued the decision to retain the existing NAAQS for CO. The primary standards are 9 parts per million (ppm) measured over 8 hours, and 35 ppm measured over 1 hour. Monitoring requirements for CO are specified in 40 CFR Part 58 as follows:

- CO monitors are required at all NCore sites. At least one NCore site is required in every state.
- One CO monitor is required to be placed at a near-road NO<sub>2</sub> monitoring station in a CBSA with population of 1 million or more. Moving an existing monitor to a new location is acceptable.
- EPA is providing authority to EPA Regional Administrators to require additional monitoring in case-by-case circumstances, such as in areas impacted by major stationary CO sources, in urban downtown areas, or urban street canyons, or in areas adversely impacted by meteorological and/or topographical influences.

- CO must be monitored at PAMS Type 2 sites with a trace level CO monitor.

Currently, the CBSAs within the District are comprised of less than 1 million people, thus the District is not required to place a CO monitor at a near-road NO<sub>2</sub> monitoring station. Monitoring has shown that the Valley's CO concentrations have not exceeded the NAAQS for over a decade. As noted in Section 4.2 of Appendix D of 40 CFR Part 58, there are no minimum requirements of the number of CO monitoring sites. The District and CARB continue CO monitoring to meet the requirement at its PAMS Type 2 sites and NCore site, and to supplement related meteorological and criteria pollutant data.

## Sulfur Dioxide

In 2010, EPA revised the SO<sub>2</sub> NAAQS and monitoring requirements in the Federal Register (40 CFR Part 58, Appendix D to Part 58 – Network Design Criteria of Ambient Air Quality Monitoring, Section 4.4). EPA established a new primary 1-hour standard of 75 ppb, and also revoked the previous 24-hour and annual primary standards. Under the revised SO<sub>2</sub> NAAQS, the monitoring requirements are determined by a Populations Weighted Emissions Index (PWEI) value in units of million persons–tons per year. The PWEI is calculated using each CBSA's updated census data and a combined total of the latest available county level SO<sub>2</sub> emissions data in the National Emissions Inventory for the counties in each CBSA. The population of a CBSA is multiplied with the total amount of SO<sub>2</sub> in tons per year emitted within a CBSA, and the resulting product is then divided by one million to produce the PWEI value. The Valley's PWEI values are shown in Table 10.

**Table 10 San Joaquin Valley's Populations Weighted Emissions Index for 2016**

County	Total County 2016 Population*	SO <sub>2</sub> Tons per Year ^	PWEI
San Joaquin	733,383	2,044	1,499
Stanislaus	540,214	548	296
Merced	271,579	329	89
Madera	155,349	329	51
Fresno	984,541	3,687	3,630
Kings	150,373	292	44
Tulare	466,339	1,351	630
Kern	886,507	1,862	1,650

\* Population estimates are for the entire county.

^ SO<sub>2</sub> Tons per Year includes the entire county. The SO<sub>2</sub> data is the most recent data for each county from 2015.

Source: California Air Resources Board California Emission Inventory Development and Reporting System (CEIDARS) <http://www.arb.ca.gov/ei/drei/maintain/database.htm>.

As per 40 CFR Part 58, Appendix D to Part 58 – Network Design Criteria of Ambient Air Quality Monitoring, Section 4.4, at least three SO<sub>2</sub> monitors are required in CBSAs with a PWEI value equal to or greater than 1,000,000. CBSAs with a PWEI value equal to or

greater than 100,000 but less than 1,000,000, are required to have at least two SO<sub>2</sub> monitors. A minimum of one SO<sub>2</sub> is required in CBSAs with a PWEI value equal to or greater than 5,000, but less than 100,000.

As determined by the above Network Design Criteria PWEI, the highest PWEI value (Kern County) is only 1,650, far below the minimum of 5,000 that would require one monitor. Incidentally, the District does not exceed the federal standard for SO<sub>2</sub> and for CBSAs that do not exceed the federal SO<sub>2</sub> standard there is no required number of SO<sub>2</sub> monitors. As a result, there are no SO<sub>2</sub> monitoring requirements for the District. Despite not having any monitoring requirements, there is one SO<sub>2</sub> monitor operating within the District's network. This monitor is located at the Fresno–Garland AMS as part of the NCore Network.

### **Reactive Nitrogen Compounds (NO<sub>y</sub>)**

Reactive Nitrogen Compounds (NO<sub>y</sub>) are among the precursors to ozone and PM<sub>2.5</sub>. As part of the National Ambient Air Monitoring Strategy (NAAMS), EPA requires NO<sub>y</sub> monitoring at 75 locations across the United States in support of a number of objectives. NCore site requirements and the PAMS program include monitoring NO<sub>y</sub> in order to meet that requirement. Measuring NO<sub>y</sub> at NCore and PAMS sites is important for understanding ozone photochemistry.

### **Toxics**

The airborne toxics program is run by CARB. Toxics measurements are collected at Stockton-Hazleton, Fresno-Garland, and Bakersfield-California. Periodic, 24-hour samples are analyzed for the following gases: benzene, Carbon tetrachloride, chloroform, ethylene dibromide, ethylene dichloride, methyl chloroform, methylene chloride, perchloroethylene, toluene, trichloroethylene, and m-, p-, and o-xylene. The samples are also analyzed for 20 particulate metals including: Arsenic, Lead, Nickel, Cadmium, and Hexavalent Chromium. District's PAMS NMH sampling program also identify and quantify several toxic hydrocarbon species.

**Detailed Site Information – Gaseous Monitors**

Criteria such as monitoring methods, monitor types, spatial scales, site types, basic monitoring objectives, current sampling frequencies, and other requirements being met by the District's gaseous pollutants monitoring network are shown in Tables 11, 12, 22 through 31, and Appendix B.

**Table 11 Gaseous Monitors**

Site Name	FRM/FEM/ARM/Other				
	Ozone	NO <sub>2</sub>	CO	NMH	Speciated VOC
Stockton–Hazelton	FEM	FRM	FRM		
Tracy–Airport	FEM	FEM			
Modesto–14th St	FEM		FRM		
Turlock	FEM	FEM			
Merced–Coffee	FEM	FEM			
Madera–City	FEM				
Madera–Pump Yard	FEM	FEM		Other	Other
Tranquillity	FEM				
Fresno–Sky Park	FEM	FEM			
Clovis–Villa	FEM	FEM	FEM	Other	Other
Fresno–Foundry		FEM			
Fresno–Drummond	FEM	FEM			
Parlier	FEM	FEM		Other	Other
Hanford–Irwin	FEM	FEM			
Visalia–Church St	FEM	FRM			
Porterville	FEM				
Shafter	FEM	FRM		Other	Other
Oildale	FEM				
Bakersfield–California	FEM	FRM			
Edison	FEM	FRM			
Bakersfield–Muni	FEM	FEM	FEM	Other	Other
Arvin–Di Giorgio	FEM				
Maricopa	FEM				

Monitoring method information for the Fresno–Garland NCore site is provided in Table 22.



**Table 12 Gaseous Monitors – Monitor Type**

Site Name	Monitor Type		
	Ozone	NO <sub>2</sub>	CO
Stockton–Hazelton	SLAMS	SLAMS	SLAMS
Tracy–Airport	SLAMS	SLAMS	
Modesto–14th St	SLAMS		SLAMS
Turlock	SLAMS	SLAMS	
Merced–Coffee	SLAMS	SLAMS	
Madera–City	SLAMS		
Madera–Pump Yard	SLAMS	SLAMS	
Tranquillity	SLAMS		
Fresno–Sky Park	SLAMS	SLAMS	
Clovis–Villa	SLAMS	SLAMS	SLAMS
Fresno–Foundry		SLAMS	
Fresno–Drummond	SLAMS	SLAMS	
Parlier	SLAMS	SLAMS	
Hanford–Irwin	SLAMS	SLAMS	
Visalia–Church St	SLAMS	SLAMS	
Porterville	SLAMS		
Shafter	SLAMS	SLAMS	
Oildale	SLAMS		
Bakersfield–California	SLAMS	SLAMS	
Edison	SLAMS	SLAMS	
Bakersfield–Muni	SLAMS	SLAMS	SLAMS
Arvin–Di Giorgio	SLAMS		
Maricopa	SLAMS		

Monitor type information for the Fresno-Garland NCore site is provided in Table 22.

## Particulate Matter (PM)

Particulate matter (PM) can be emitted directly as primary PM as well as formed in the atmosphere through chemical reactions of precursors to form secondary PM. Primary PM can be emitted either naturally or as a result of human (anthropogenic) activity. The resulting ambient PM mixture includes aerosols consisting of components of nitrates, sulfates, elemental carbon, organic carbon compounds, acid aerosols, trace metals, and geological materials. Under current regulations, particulate matter is differentiated by particle size as opposed to composition. Federal air quality standards differentiate two size fractions of PM: PM that is 10 microns or less in diameter (PM<sub>10</sub>) and the smaller subset that is 2.5 microns or less in diameter (PM<sub>2.5</sub>).

The mountain ranges that surround the Valley contribute to trapping pollutants, including PM, in the Valley. The Valley's frequent and strong winter temperature inversions prevent air from rising and particulates remain trapped near the surface. Prolonged periods of high pressure and stable conditions with low wind speeds can cause stagnant conditions that trap pollutants near the surface, causing PM<sub>2.5</sub> concentrations to increase during these poor dispersion periods. During low pressure events, unstable conditions can cause vertical and horizontal mixing that help disperse PM<sub>2.5</sub> and lower the ambient concentrations.

To better understand the influence of meteorology, natural events, and sources of emissions on the Valley's PM<sub>2.5</sub> concentrations, the District began the California Regional Particulate Air Quality Study (CRPAQS). CRPAQS was a comprehensive particulate field study for which monitoring occurred between December 1999 and February 2001. Through the use of over 70 SPM PM<sub>10</sub> sites and 50 SPM PM<sub>2.5</sub> sites, researchers analyzed data from CRPAQS for database development, analysis, and modeling. In addition to CRPAQS, other Valley-specific air quality studies have assessed particulate emissions from agricultural operations, unpaved and paved road particulate emissions, and particulate formation in fog episodes. The design of the Valley's current PM network is an outgrowth of the results and analysis from CRPAQS and other research efforts.

The Valley's PM monitoring network includes Federal Reference Method (FRM) monitors, Federal Equivalent Method (FEM) monitors, and Non-FRM/FEM monitors. FRM monitors for PM are manual filter-based monitors. FRM samples are primarily collected on either a one-in-six day sampling schedule or a one-in-three day sampling schedule. FRM monitors meet the "NAAQS Comparison" objective, helping agencies determine the Valley's attainment status and helping shape the strategies for reaching or maintaining PM attainment. FRM filters can also be analyzed for PM speciation, lending to their usage for "Research Support" objectives as well.

Beta Attenuation Monitors (BAM) and Tapered Element Oscillating Microbalance (TEOM) monitors are continuous, near real-time monitors that provide the hourly PM data used in AQI and Smoke Management System (SMS) burn allocations. Data from these monitors are also used in hazard reduction burning allocations, residential wood

burning declarations, and in the District's Real-Time Air Advisory Network (RAAN). As such, these monitors help meet the "Timely/Public" objective.

Not all real-time monitors meet the "NAAQS Comparison" objective because they do not meet the rigorous engineering design, quality assurance, and quality control standards necessary for comparison to the NAAQS. An FEM monitor is often a real-time monitor that has been designated by EPA as being equivalent to FRM monitors. FEMs satisfy both the "NAAQS Comparison" objective and the "Timely/Public" objective. All of the Valley's TEOMs are FEMs, and some of the Valley's BAMs are FEMs.

Several PM<sub>2.5</sub> analyzers within the District's network are located at sites that are not required by EPA. The District operates these sites for various reasons, including complying with state laws (Huron), as a settlement to a lawsuit (Tracy-Airport), and for the purposes of helping the District's RAAN and forecasting programs (Porterville and Lebec). The Lebec site was donated to the District. Additionally, settlements of CEQA lawsuits between a private company and a private citizen required the company to give the District specific air monitoring equipment to be operated at specific sites. All of these sites and/or equipment are not required for NAAQS purposes.

The District operates four (4) PM<sub>2.5</sub> analyzers (parameter code 88502) as Special Purpose Monitors (SPM). These analyzers have not been certified by EPA as comparable to the PM<sub>2.5</sub> NAAQS and do not meet all of the certification requirements. Specifically, EPA requires a runtime of 42 minutes per hour with an 8 (eight) minute count and these analyzers operate with a runtime of 50 minutes per hour with a 4 minute count. Additionally, these instruments use a Sharp Cut Cyclone PM<sub>2.5</sub> inlet instead of a Very Sharp Cut Cyclone PM<sub>2.5</sub> inlet. Finally, some of these analyzers do not support the approved software to operate in a manner comparable to the NAAQS. While these sites are non-FEMs, they produce valuable data that is of sufficient quality for their intended purposes. All other required PM<sub>2.5</sub> analyzers in the District's network, both SLAMS and SPM, are operated in compliance with 40 CFR Part 58 Appendix A and Appendix E, and are comparable to the PM<sub>2.5</sub> NAAQS.

### **Detailed Site Information – PM Monitors**

As mentioned above, monitoring sites and monitors must meet siting and operational criteria as outlined in 40 CFR Part 58. Criteria such as monitor types, spatial scales, site types, basic monitoring objectives, current sampling frequencies, and other requirements being met by the District's PM network are shown in Tables 19 through 31 and Appendix B.

### **PM Collocation Requirements**

Per 40 CFR 58 Appendix A, Sections 3.2.5 and 3.2.6, the District's Particulate Matter collocation requirements are met by the Primary Quality Assurance Organization (PQAO). CARB is the PQAO for the District as well as several other air districts. See

CARB's Air Monitoring Network Plans for details on how collocation requirements are met by the PQAO. Table 21 shows the collocated PM monitors currently operating in the District's monitoring network.

### Public Review of Changes to the PM<sub>2.5</sub> Monitoring Network

Public input is required whenever the District proposes to move an existing violating PM<sub>2.5</sub> monitor (40 CFR 58.10(c)). The District uses the annual Air Monitoring Network Plan to notify and seek public comment on any planned changes to the existing PM<sub>2.5</sub> network. The public is provided 30 days to comment on the Air Monitoring Network Plan and any PM<sub>2.5</sub> network changes. The plan is regularly posted on the District website, after which the public is notified of the availability of the document for the 30 day review. In the event of unanticipated changes to the PM<sub>2.5</sub> network that occur outside the Air Monitoring Network Plan process, the District will post the required documentation on its website and seek public comment.

### PM<sub>10</sub> Monitoring Requirements

The San Joaquin Valley has been redesignated to attainment for PM<sub>10</sub>, and the District's *2007 PM<sub>10</sub> Maintenance Plan* and ongoing PM<sub>10</sub> monitoring will assure continued compliance with the federal standard. All required PM<sub>10</sub> analyzers, both SLAMS and SPM, are operated in compliance with 40 CFR Part 58 Appendix A and Appendix E, and are comparable to the PM<sub>10</sub> NAAQS.

According to 40 CFR Part 58 Appendix D Table D-4 the minimum number of PM<sub>10</sub> sites required per MSA is based on population (see Table 13). As shown in Table 14 the District's PM<sub>10</sub> monitoring network meets the requirements for the San Joaquin Valley. Additionally, the year 2016 24-hour PM<sub>10</sub> design values for each PM<sub>10</sub> monitoring site in the District's network are provided in Table 15.

**Table 13 Minimum PM<sub>10</sub> Monitoring Requirements**

Population category	High concentration: Ambient concentrations exceed the PM <sub>10</sub> NAAQS by 20% or more ( $\geq 180 \mu\text{g}/\text{m}^3$ )	Medium concentration: Ambient concentrations exceed 80% of the PM <sub>10</sub> NAAQS ( $\geq 120 \mu\text{g}/\text{m}^3$ )	Low concentration: Ambient concentrations less than 80% of the PM <sub>10</sub> NAAQS ( $< 120 \mu\text{g}/\text{m}^3$ ), or no design value
> 1,000,000	6 – 10	4 – 8	2 – 4
500,000 – 1,000,000	4 – 8	2 – 4	1 – 2
250,000 – 500,000	3 – 4	1 – 2	0 – 1
100,000 – 250,000	1 – 2	0 – 1	0

A range is presented, and the actual number of stations per area is jointly determined by EPA, the State, and the local agency.

**Table 14 PM<sub>10</sub> Monitoring requirements for the Valley**

MSA	County	2016 Population	PM <sub>10</sub>		
			24-hour 2016 Highest concentration in MSA (µg/m <sup>3</sup> )	Number of SLAMS stations required	SLAMS stations in MSA
Stockton-Lodi	San Joaquin	733,383	71	1 – 2	2
Modesto	Stanislaus	540,214	83	1 – 2	2
Merced	Merced	271,579	64	0 – 1	1
Madera	Madera	155,349	122	0 – 1	1
Fresno	Fresno	984,541	91	1 – 2	3
Hanford–Corcoran	Kings	150,373	151	0 – 1	2
Visalia–Porterville	Tulare	466,339	136	1 – 2	1
Bakersfield*	Kern	753,531*	91	1 – 2	3

\* Population estimate for Kern County (Valley Portion) was calculated using census tract data for the population living within the District's boundaries.

**Table 15 24-Hour PM<sub>10</sub> design values at each site\***

MSA	Site Name	2016 Design Value
Stockton-Lodi	Stockton-Hazeltan	65
	Manteca	71
	Tracy–Airport	52
Modesto	Modesto-14th St	83
	Turlock	62
Merced	Merced-M St	64
Madera	Madera-City	122
Fresno	Fresno-Garland^	91
	Fresno-Drummond	86
	Clovis-Villa	65
Hanford-Corcoran	Hanford-Irwin	151
	Corcoran-Patterson	127
Visalia-Porterville	Visalia-Church St	136
Bakersfield	Oildale	89
	Bakersfield-Golden State/M St	91
	Bakersfield-California	82

\* Current Sampling Frequency information is provided in Table 27.

^ Current Sampling Frequency information for the Fresno-Garland NCore site is provided in Table 22.

## PM2.5 Monitoring Requirements

The San Joaquin Valley is designated nonattainment for PM2.5. Per 40 CFR Part 58 Appendix D Table D-5 the minimum number of PM2.5 sites required per MSA is based on population (see Table 16). Table 17 shows that the District's PM2.5 monitoring network meets the PM2.5 monitoring requirements for the San Joaquin Valley. Additionally, the 2014 – 2016 annual and 24-hour PM2.5 design values for each site in the District's PM2.5 network are provided in Table 18.

**Table 16 Minimum PM2.5 Monitoring Requirements**

MSA population	Most recent 3–year design value $\geq 85\%$ of any PM2.5 NAAQS (equivalent to an annual design value $\geq 10.2 \mu\text{g}/\text{m}^3$ or a 24–hour design value $\geq 29.8 \mu\text{g}/\text{m}^3$ )	Most recent 3–year design value $< 85\%$ of any PM2.5 NAAQS (equivalent to an annual design value $< 10.2 \mu\text{g}/\text{m}^3$ or a 24–hour design value $< 29.8 \mu\text{g}/\text{m}^3$ ), or no design value
$> 1,000,000$	3	2
500,000 – 1,000,000	2	1
50,000 – $< 500,000$	1	0

**Table 17 PM2.5 Monitoring Requirements for the Valley**

MSA	County	2016 Population	PM2.5 <sup>1</sup>				
			24–hr 2014–2016 Design Value in MSA ( $\mu\text{g}/\text{m}^3$ )	Annual 2014–2016 Design Value in MSA ( $\mu\text{g}/\text{m}^3$ )	Number of SLAMS stations required	Number of SLAMS stations in MSA	Number of Continuous PM2.5 Monitors in MSA
Stockton-Lodi	San Joaquin	733,383	39	12.2	2	2	3
Modesto	Stanislaus	540,214	46	13.0	2	2	2
Merced	Merced	271,579	40	11.8	1	2	1
Madera	Madera	155,349	45	13.3	1	1	1
Fresno <sup>2</sup>	Fresno	984,541	54	14.1	2	7	3
Hanford–Corcoran <sup>3</sup>	Kings	150,373	59	16.5	1	2	2
Visalia–Porterville	Tulare	466,339	54	16.2	1	1	3
Bakersfield <sup>4</sup>	Kern	753,531	61	18.4	2	3	2

<sup>1</sup> Air quality data may include data influenced by exceptional events and/or data completeness and substitution requirements.

<sup>2</sup> The PM2.5 FRM monitor at Fresno-Garland is one of the monitors helping meet the number of PM2.5 SLAMS

monitors required in the Fresno MSA.

<sup>3</sup> Hanford design values are displayed for the MSA, Corcoran 2014-16 design values are not representative of ambient concentrations due to incomplete data in 2015 resulting from the shelter being destroyed in a fire.

<sup>4</sup> Population estimate for Kern County (Valley Portion) was calculated using census tract data for the population living within the District's boundaries. 24-hour design value for Bakersfield-Golden/M is not shown since it was influenced by incomplete data in 2014 and is not representative of ambient conditions.

**Table 18 24-Hour and Annual PM<sub>2.5</sub> Maximum Design Values**

MSA	Site Name	2014-2016 24-Hour Design Value	2014-2016 Annual Design Value	Max Site in MSA	
				24-Hour	Annual
Stockton-Lodi	Stockton–Hazelton	39	12.2	✓	✓
	Manteca	37	10.7		
Modesto	Modesto–14th St	39	10.5		
	Turlock	46	13.0	✓	✓
Merced	Merced–M St	40	11.7	✓	
	Merced–Coffee	39	11.8		✓
Madera	Madera–City	45	13.3	✓	✓
Fresno	Tranquility	31	8.5		
	Clovis–Villa	49	14.1		
	Fresno–Pacific	48	13.6		
	Fresno–Garland	54	14.1	✓	✓
Hanford-Corcoran	Corcoran–Patterson*	--	--		
	Hanford–Irwin	59	16.5	✓	✓
Visalia-Porterville	Visalia–Church St	54	16.2		
Bakersfield	Bakersfield–Golden / M St*	--	--		
	Bakersfield–California	61	16.5		
	Bakersfield–Airport (Planz)	61	18.4	✓	✓

\*24-hour and annual design values for Corcoran not displayed due to incomplete data causing concentrations unrepresentative of ambient conditions, as described earlier. 24-hour and annual design values for Bakersfield-Golden/M not displayed for the same reasons.



## PM<sub>2.5</sub> Chemical Speciation Site Requirements

Per CFR 40 Part 58, each State must conduct chemical speciation monitoring and analysis at sites that have been designated part of the Speciation Trends Network (STN) and approved by the Administrator. Monitoring methods and sampling schedules used at the PM<sub>2.5</sub> chemical speciation urban trends sites must be approved by the Administrator. Additionally, the sites must also include analysis for elements, selected anions and cations, and carbon. Speciation data can be used to support a variety of efforts including:

- Air quality modeling analyses to help track NAAQS attainment progress and emissions controls.
- Aiding the interpretation of health studies by linking health effects to PM<sub>2.5</sub> constituents.
- Understanding the effects of atmospheric elements on visibility.
- Assisting with air monitoring network design and siting adjustments.

In addition to the STN requirement, EPA encourages air agencies to operate additional supplemental speciation monitors to meet needs independent of the requirement such as supporting health effects related studies, and developing State implementation plans. There are four PM<sub>2.5</sub> speciation monitors operating in the District's network, two that meet the STN requirement and two supplemental monitors. Details on these PM<sub>2.5</sub> speciation monitors are shown in Table 19, and Appendix B.

**Table 19 PM<sub>2.5</sub> Speciation Monitors**

Site Name	Network Affiliation	Monitor Type	FRM/FEM/ARM/Other	Site Type	Spatial Scale	Basic Monitoring Objective	Current Sampling Frequency	QA Collocated
Modesto–14th St	CSN (Supplemental)	SLAMS	Other	PE	N	RS	1:6	
Fresno–Garland*	NCore, STN	Other	Other	PE	N,U	RS	1:3	
	NCore, STN	Other	Other	PE	N,U	RS	1:3	
Visalia–Church St	Supplemental	SLAMS	FRM	PE	N	RS	1:3	
	Supplemental	SLAMS	Non-FEM	PE, RT	N	RS, TP	Hourly	
Bakersfield–California	STN	SLAMS	Other	PE	N,U	RS	1:3	
	CSN STN	Other	Other	PE	N,U	RS	1:3	
	CSN STN	Other	Other	PE	N,U	RS	1:6	✓

PE – Population Exposure    N – Neighborhood    U – Urban    RS – Research    TP – Timely/Public  
Hourly = One sample every hour    1:3 = 1 in 3 day sampling    1:6 = 1 in 6 day sampling

\* PM<sub>2.5</sub> Speciation monitor information for the Fresno–Garland NCore site is also provided in Table 22.

Per network plan requirements described above, Tables 20 and 21 show the types of monitoring methods, collocated monitors, and monitor types operating in the District's PM monitoring network.

Table 20 PM Monitors

Site Name	FRM/FEM/ARM/Other						QA Collocated			
	PM10 (man.)	PM10 (cont.)	PM2.5 (man.)	PM2.5 (cont.)	PM2.5 Annual NAAQS*		PM10 (man.)	PM10 (cont.)	PM2.5 (man.)	PM2.5 (cont.)
					Yes	No				
Stockton–Hazelton	FRM			FEM	✓✓					FEM
Manteca				FEM	✓			FEM		
Tracy–Airport		FEM		Non–FEM		✓				
Modesto–14th St		FEM		FEM	✓				FRM	
Turlock	FRM			FEM	✓					
Merced–Coffee				FEM	✓					
Merced–M St	FRM		FRM		✓					
Madera–City		FEM		FEM	✓✓				FRM	
Tranquillity				FEM	✓					
Clovis–Villa	FRM		FRM		✓✓					FEM
Fresno–Pacific			FRM		✓					
Fresno–Drummond	FRM						FRM			
Huron				Non–FEM		✓				
Corcoran–Patterson		FEM	FRM	FEM	✓✓					FEM
Hanford–Irwin	FRM			FEM	✓			FEM		
Visalia–Church St		FEM	FRM	Non–FEM	✓ (FRM)	✓ (Non-FEM)				
Porterville				Non–FEM		✓				
Oildale	FRM									
Bakersfield–Golden / M St	FRM		FRM		✓					
Bakersfield–California	FRM		FRM	Non–FEM	✓ (FRM)	✓ (Non-FEM)	FRM		FRM	
Bakersfield–Airport (Planz)			FRM		✓					
Lebec				Non–FEM		✓				

cont. – Continuous    man. – Manual

\* - PM2.5 monitors suitable for comparison to the PM2.5 Annual NAAQS.

Monitoring method and monitor collocation information for the Fresno-Garland NCore site is provided in Table 22.

**Table 21 PM Monitors – Monitor Type**

Site Name	Monitor Type				QA Collocated			
	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)
Stockton–Hazelton		SLAMS	SLAMS			SPM		
Manteca		SLAMS		SLAMS				
Tracy–Airport		SPM		SLAMS				
Modesto–14th St		SLAMS		SLAMS	SLAMS			
Turlock		SLAMS	SLAMS					
Merced–Coffee		SLAMS						
Merced–M St	SLAMS		SLAMS					
Madera–City		SLAMS		SLAMS	SLAMS			
Tranquillity		SLAMS						
Clovis–Villa	SLAMS	SLAMS	SLAMS	SLAMS		SLAMS		
Fresno–Pacific	SLAMS							
Fresno–Drummond			SLAMS				SLAMS	
Huron		SPM						
Corcoran–Patterson	SLAMS	SLAMS		SLAMS				
Hanford–Irwin		SLAMS	SLAMS	SLAMS				
Visalia–Church St	SLAMS	SLAMS		SLAMS				
Porterville		SPM						
Oildale			SLAMS					
Bakersfield–Golden / M St	SLAMS		SLAMS					
Bakersfield–California	SLAMS	SLAMS	SLAMS		SLAMS	SLAMS	SLAMS	
Bakersfield–Airport (Planz)	SLAMS							
Lebec		SPM						

cont. – Continuous man. – Manual

Monitor information for the Fresno-Garland NCore site is provided in Table 22.

**Lead**

Per the revised lead NAAQS and monitoring requirements which became effective on January 26, 2011, EPA requires monitoring agencies to install non–source oriented lead monitors at NCore sites in CBSAs with populations of 500,000 or greater. The Fresno–Garland air monitoring site (an NCore site) is the only site within the District’s network that meets these criteria. In December 2011, CARB began measuring lead at the Fresno-Garland site to satisfy this requirement. EPA also requires state monitoring agencies to use the emission threshold of 0.5 tons per year (tpy) when determining if a monitor should be placed near an industrial facility that emits lead. The emission threshold for airport sources is 1.0 tpy, except for airports that are included in special

studies. The District has not identified any lead sources above the aforementioned thresholds, thus it is not required to monitor for that threshold at this time.

## NCore

EPA's October 2006 ambient air monitoring amendments established a requirement for NCore multi-pollutant monitoring stations to be operational by January 1, 2011. The Fresno-First site, which was operated by CARB, was selected by EPA to be an NCore site. CARB submitted an NCore plan to EPA in November 2009. The Fresno-First site already met the NCore requirements for filter-based and continuous PM<sub>2.5</sub>, speciated PM<sub>2.5</sub>, ozone, and meteorology. In December 2010, CARB installed trace level CO, trace level SO<sub>2</sub>, trace level NO<sub>y</sub>, and continuous PM-Coarse monitors at this site. A gas dilution calibrator, a zero air generator, and digital data loggers were also installed to support NCore monitoring. In December 2011, CARB installed a TSP-lead sampler which completed all the pollutant monitoring requirements for the NCore program. Additionally, CARB moved the Fresno-First site two blocks north to Garland Avenue. The Fresno-Garland site continues to serve as an NCore site. Table 22 shows the different parameters measured at the NCore site.

**Table 22 Fresno-Garland NCore Site**

Pollutant	Monitor Type	FRM/FEM/ARM/Other	Site Type	Spatial Scale	Basic Monitoring Objective	Current Sampling Frequency	QA Collocation
Ozone	SLAMS	FEM	PE	U	NC,RS	Hourly	
NO <sub>2</sub>	SLAMS	FRM	Max PEI	U	NC,RS	Hourly	
CO	SLAMS	FRM	PE	U	NC,RS	Hourly	
SO <sub>2</sub>	SLAMS	FEM	PE	U	NC,RS	Hourly	
NO <sub>y</sub>	SLAMS	Other	PE	U	NC,RS	Hourly	
Toxics	SLAMS	Other	PE	N	RS,TP	Hourly	
PM <sub>2.5</sub> (manual)	SLAMS	FRM	HC	N	NC,RS	1:1	
PM <sub>2.5</sub> (manual)	SLAMS	FRM	HC,PE,QA	N	NC,RS	1:6	✓
PM <sub>2.5</sub> (continuous)	SLAMS	FEM	HC,QA	N	NC,RS	Hourly	✓
PM <sub>2.5</sub> Speciation (STN)	Other	Other	PE	N,U	RS	1:3	
	Other	Other	PE	N,U	RS	1:3	
PM <sub>10</sub> STP (continuous)	SLAMS	FEM	PE	N	NC,RS	Hourly	
PM <sub>10</sub> STP (Lead TSP) (manual)	SLAMS	Other	PE	N	NC	1:6	
PM <sub>10</sub> LC (Lead TSP) (manual)	SLAMS	Other	PE	N	NC,RS,TP	1:6	
PM <sub>10-2.5</sub> (continuous)	SLAMS	FEM	PE,QA	N	NC,RS	Hourly	✓ *

PE – Population Exposure HC – Highest Concentration N – Neighborhood U – Urban RS – Research  
 MxPEI – Max Precursor Emissions Impact NC – NAAQS Comparison TP – Timely/Public  
 Hourly = One sample every hour 1:1 = One sample per day 1:6 = 1 in 6 day sampling  
 \* Serving as primary monitor

## Non-EPA Federal Monitors

The National Park Service operates and maintains the Non-EPA Federal monitors located at Ash Mountain and Lower Kaweah. Details on these monitors are shown in Table 23 and Appendix B.

**Table 23 Non-EPA Federal Monitors**

Sequoia–Ash Mountain						
Parameter	Site Type	FRM/FEM/ARM/Other	Spatial Scale	Network affiliation	Basic Monitoring Objective	Current Sampling Frequency
Ozone	HC, RT	Other	R	Castnet	NC, RS, TP	Hourly
PM <sub>2.5</sub> (continuous)	RT	FEM	R	IMPROVE	RS, TP	Hourly
Meteorology	GB	Other	R	Castnet	RS, TP	Hourly
Sequoia–Lower Kaweah						
Parameter	Site Type	FRM/FEM/ARM/Other	Spatial Scale	Network affiliation	Basic Monitoring Objective	Current Sampling Frequency
Ozone	RT	Other	R	None	NC, RS, TP	Hourly
Meteorology	GB	Other	R	None	RS, TP	Hourly

HC – High Concentration RT - Regional Transport GB – General Background R - Regional  
 NC – NAAQS Comparison RS – Research TP – Timely/Public Hourly = One sample every hour

As previously noted, purpose, siting, and operational requirements for each monitor must be met as outlined in appendices A, C, D, and E of 40 CFR Part 58. Accordingly, this detailed site information is provided in the tables below as well as in Appendix B of this network plan.

**Table 24 SLAMS – Site Type**

Site Name	Ozone	PM <sub>2.5</sub> (man.)	PM <sub>2.5</sub> (cont.)	PM <sub>10</sub> (man.)	PM <sub>10</sub> (cont.)	NO <sub>2</sub>	CO	NMH
Stockton–Hazelton	HC, PE		HC, PE	HC		PE	PE	
Manteca			PE		PE			
Tracy–Airport	RT				RT	RT		
Modesto–14th St	HC, PE	PE	PE	PE			PE	
Turlock	HC, PE		HC, PE	PE		PE		
Merced–Coffee	HC, PE		PE			PE		
Merced–M St		HC, PE		HC, PE				
Madera–City	HC, GB	HC, PE	HC, PE		PE			
Madera–Pump Yard	HC, GB					PE		PE
Tranquillity	PE		PE					
Fresno–Sky Park	HC, PE, RT					PE		

**Table 24 SLAMS – Site Type (continued)**

Site Name	Ozone	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	NO <sub>2</sub>	CO	NMH
Clovis–Villa	Max PEI, HC	HC	HC	PE	HC	HC	Max PEI, PE	HC
Fresno–Pacific		PE						
Fresno–Foundry						HC		
Fresno–Drummond	HC, PE, RT			PE, QA		HC		
Parlier	HC, RT					PE		PE
Corcoran–Patterson		HC	HC, PE		HC, PE			
Hanford–Irwin	HC, PE		PE	PE	PE	PE		
Visalia–Church St	GB	HC, PE	RT, PE		PE	PE		
Porterville	HC, PE		PE					
Shafter	GB, PE					PE		PE
Oildale	HC, RT			SO				
Bakersfield– Golden / M St		PE		PE				
Bakersfield–California	HC, GB	HC, PE	PE	PE		PE		
Edison	HC, RT					PE		
Bakersfield–Muni	HC					HC	PE	PE
Bakersfield–Airport (Planz)		HC, PE						
Arvin–Di Giorgio	HC, PE							
Maricopa	HC, RT							

cont. – Continuous    man. – Manual    PE – Population Exposure    HC – Highest Concentration  
 RT – Regional Transport    GB – General/Background    QA – QA Collocation    SO – Source Oriented  
 Site Type information for the Fresno-Garland NCore site is provided in Table 22.

**Table 25 SLAMS – Spatial Scale**

Site	Ozone	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	NO <sub>2</sub>	CO	NMH
Stockton–Hazelton	N		N	N		N	N	
Manteca			N		N			
Tracy–Airport	R				R	R		
Modesto–14th St	N	N	N		N		N	
Turlock	N		N	N		N		
Merced–Coffee	N		N			N		
Merced–M St		N		N				
Madera–City	N	N	N		N			
Madera–Pump Yard	N					N		N
Tranquillity	U		U					
Fresno–Sky Park	N					N		
Clovis–Villa	N	N	N	N	N	N	N	N

**Table 25 SLAMS – Spatial Scale (continued)**

Site	Ozone	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	NO <sub>2</sub>	CO	NMH
Fresno–Pacific		N						
Fresno–Foundry						MC		
Fresno–Drummond	N			N		N		
Parlier	N					N		N
Corcoran–Patterson		N			N			
Hanford–Irwin	N		N	N	N	N		
Visalia–Church St	N	N	N		N	N		
Porterville	N		N					
Shafter	N					N		N
Oildale	U			MD				
Bakersfield– Golden / M St		MC		MC				
Bakersfield–California	N	N	N	N		N		
Edison	N					N		
Bakersfield–Muni	N					N	N	N
Bakersfield–Airport (Planz)		N						
Arvin–Di Giorgio	N							
Maricopa	N							

N – Neighborhood U – Urban R – Regional MC – Microscale MD – Middle scale  
 cont. – Continuous man. – Manual

Spatial Scale information for the Fresno-Garland NCore site is provided in Table 22.

**Table 26 SLAMS – Basic Monitoring Objective**

Site	Ozone	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	NO <sub>2</sub>	CO	NMH
Stockton– Hazelton	NC, RS, TP		NC, RS, TP	NC, RS		NC, RS, TP	NC, RS, TP	
Manteca			NC,RS,TP		NC,RS,TP			
Tracy–Airport	NC,RS,TP				NC,RS,TP	NC, RS, TP		
Modesto– 14th St	NC,RS,TP	NC, RS	NC,RS,TP		NC,RS,TP		NC, RS, TP	
Turlock	NC,RS,TP		NC,RS,TP	NC,RS		NC, RS, TP		
Merced– Coffee	NC,RS,TP		NC,RS,TP			NC, RS,TP		
Merced–M St		NC, RS		NC RS				
Madera–City	NC,RS,TP	NC,RS,TP	NC,RS,TP		NC,RS,TP			
Madera– Pump Yard	NC,RS,TP					NC, RS, TP		RS
Tranquillity	NC,RS,TP		NC,RS,TP					
Fresno–Sky Park	NC,RS,TP					NC, RS, TP		
Clovis–Villa	NC,RS,TP	NC,RS	NC,RS,TP	NC,RS	NC,RS,TP	NC, RS, TP	NC, RS, TP	RS

**Table 26 SLAMS – Basic Monitoring Objective (continued)**

Site	Ozone	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	NO <sub>2</sub>	CO	NMH
Fresno–Pacific		NC,RS						
Fresno–Foundry						NC,RS,TP		
Fresno–Drummond	NC,RS,TP			NC, RS		NC		
Parlier	NC,RS,TP					NC, RS, TP		RS
Corcoran–Patterson		NC,RS	NC,RS,TP		NC,RS, TP			
Hanford–Irwin	NC,RS,TP		NC,RS,TP	NC, RS	NC, RS	NC,RS,TP		
Visalia–Church St	NC, RS,TP	NC, RS	RS, TP		NC,RS, TP	NC, RS,TP		
Porterville	NC,RS,TP		RS, TP					
Shafter	NC, RS,TP					NC, RS,TP		RS
Oildale	NC, RS, TP			NC, RS				
Bakersfield–Golden / M St		NC, RS		NC, RS				
Bakersfield–California	NC, RS, TP	NC, RS	RS, TP	NC, RS		NC, RS, TP		
Edison	NC, RS,TP					NC, RS,TP		
Bakersfield–Muni	NC,RS,TP					NC, RS	NC,RS, TP	RS
Bakersfield–Airport (Planz)		NC, RS						
Arvin–Di Giorgio	NC, RS,TP							
Maricopa	NC,RS,TP							

NC – NAAQS Comparison RS – Research TP – Timely/Public cont. – Continuous man. – Manual  
 Basic Monitor Objective information for the Fresno-Garland NCore site is provided in Table 22.

**Table 27 SLAMS – Current Sampling Frequency**

Site Name	Ozone	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	NO <sub>2</sub>	CO	NMH
Stockton–Hazelton	Hourly		Hourly	1:6		Hourly	Hourly	
Manteca			Hourly		Hourly			
Tracy–Airport	Hourly				Hourly	Hourly		
Modesto–14th St	Hourly	1:12	Hourly		Hourly		Hourly	
Turlock	Hourly		Hourly	1:6		Hourly		
Merced–Coffee	Hourly		Hourly			Hourly		
Merced–M St		1:3		1:6				
Madera–City	Hourly	1:12	Hourly		Hourly			
Madera–Pump Yard	Hourly					Hourly		Hourly
Tranquillity	Hourly		Hourly					



**Table 27 SLAMS – Current Sampling Frequency (continued)**

Site Name	Ozone	PM2.5 (man.)	PM2.5 (cont.)	PM10 (man.)	PM10 (cont.)	NO <sub>2</sub>	CO	NMH
Fresno–Sky Park	Hourly					Hourly		
Clovis–Villa	Hourly	1:3	Hourly	1:6	Hourly	Hourly	Hourly	Hourly
Fresno–Pacific		1:3						
Fresno–Foundry						Hourly		
Fresno–Drummond	Hourly			1:6		Hourly		
Parlier	Hourly					Hourly		Hourly
Corcoran–Patterson		1:3	Hourly		Hourly			
Hanford–Irwin	Hourly		Hourly	1:6	Hourly	Hourly		
Visalia–Church St	Hourly	1:3	Hourly		Hourly	Hourly		
Porterville	Hourly		Hourly					
Shafter	Hourly					Hourly		Hourly
Oildale	Hourly			1:6				
Bakersfield–Golden / M St		1:3		1:6				
Bakersfield–California	Hourly	1:1	Hourly	1:6		Hourly		
Edison	Hourly					Hourly		
Bakersfield–Muni	Hourly					Hourly	Hourly	Hourly
Bakersfield–Airport (Planz)		1:3						
Arvin–Di Giorgio	Hourly							
Maricopa	Hourly							

cont. – Continuous    man. – Manual    Hourly = One sample every hour    1:1 = One sample per day

1:3 = 1 in 3 day sampling    1:6 = 1 in 6 day sampling

Current Sampling Frequency information for the Fresno-Garland NCore site is provided in Table 22.

**Table 28 SPM – Site Type**

Site Name	Ozone	PM2.5 (continuous)	PM10 (continuous)
Stockton-Hazelton		GB, QA	
Tracy–Airport		RT	
Huron		PE	
Porterville		PE	
Lebec		PE	

PE – Population Exposure    GB – General Background    QA – Quality Collocation    RT – Regional Transport

**Table 29 SPM – Spatial Scale**

Site Name	Ozone	PM2.5 (continuous)	PM10 (continuous)
Stockton-Hazelton		N	
Tracy–Airport		R	
Huron		N	
Porterville		N	
Lebec		N	

N – Neighborhood

R – Regional

**Table 30 SPM – Basic Monitoring Objective**

Site	Ozone	PM2.5 (continuous)	PM10 (continuous)
Stockton-Hazelton		TP	
Tracy–Airport		TP	
Huron		TP	
Porterville		TP	
Lebec		TP	

TP – Timely/Public

**Table 31 SPM – Current Sampling Frequency**

Site	Ozone	PM2.5 (continuous)	PM10 (continuous)
Stockton-Hazelton		Hourly	
Tracy–Airport		Hourly	
Huron		Hourly	
Porterville		Hourly	
Lebec		Hourly	

Hourly = One sample every hour

## IMPROVEMENTS AND PLANNED CHANGES TO THE DISTRICT'S AIR MONITORING NETWORK

The Valley air monitoring network is continually being improved. MSA/CBSA-specific changes are generally described below. Before any action is taken on the planned changes noted in this section, the District will work with CARB and EPA, as appropriate, to address necessary requirements for documentation. A summary of the planned changes to the District's air monitoring network during 2017/2018 is provided in Table 32.

## **Network Changes during 2016/2017**

### **Corcoran**

In response to an electrical fire that destroyed the Corcoran air monitoring station in February 2015, the District completed the installation of a new permanent shelter for this site in the Fall of 2016, replacing the temporary trailer that was being used since early 2016. The same parameters that were measured in the original Corcoran shelter are continuing to be monitored in new building.

### **Bakersfield Near-Road Site**

The District continues to make progress in establishing the near-road NO<sub>2</sub> monitor in Bakersfield, and anticipates that this project will be completed before the end of 2017. This District is planning to begin official monitoring at this new site in January 2018. This planned site is located just north of Truxton Avenue on the east side of Highway 99.

### **Deployment of New Air Monitoring Network Technology**

During this last year, the District began deploying the Teledyne 602 instrument into its air monitoring network, which measures both PM<sub>10</sub> and PM<sub>2.5</sub> simultaneously and in real-time, allowing for more efficient monitoring operations. The Teledyne 602 units that are currently operating have been deployed to the Clovis and Corcoran air monitoring sites. The District has additionally deployed new EPA approved NO<sub>x</sub> and ozone samplers with improved technology as they have become available, improving the accuracy of these measurements throughout the air monitoring network. To allow for staff to complete calibration work remotely and enhance the calibration process, the District has also deployed new calibration units to sites measuring gas parameters through the network.

## **Planned Improvements and Other Changes Scheduled for 2017/2018**

### **Oildale**

The Oildale FRM PM<sub>10</sub> monitor was replaced with a FEM PM<sub>10</sub> monitor in July 2015. However, operation of the FEM PM<sub>10</sub> monitor has been suspended as of 8/28/2015 due to rooftop safety issues. The FRM PM<sub>10</sub> monitor has been reinstalled. The FEM PM<sub>10</sub> monitor will resume operation and will replace the FRM monitor once the rooftop safety issues have been resolved.

### **Arvin-Di Giorgio PAMS Type 3 Station**

The District is required to have a PAMS Type 3 air monitoring station in the Bakersfield MSA. The District has not been operating a PAMS Type 3 station since the Arvin-Bear Mountain site closed. A permanent air monitoring shelter of sufficient size to house the equipment may soon be built at Arvin-Di Giorgio due to EPA's recent approval of CARB's relocation request<sup>1</sup>. Once this construction is complete, the District may install PAMS Type 3 equipment to begin PAMS monitoring again in the Arvin area (see discussion below).

### **PAMS Network Design**

EPA recently changed the monitoring requirements for areas currently required to operate and maintain PAMS networks. Under these changes, PAMS monitoring will be required at NCore sites in an area's network, which is the Fresno-Garland site for the San Joaquin Valley, and will be optional at sites currently measuring PAMS parameters, as defined in this network plan. These changes are designated to become effective in 2019 for affected areas. The District will work closely with ARB and EPA to ensure that active and informative PAMS monitoring is conducted moving forward, particularly given the District's ongoing efforts toward attaining the federal ozone standards.

### **Lower Air Profilers**

As a part of the upcoming changes to PAMS monitoring requirements, the operation of lower air profilers (LAP) will no longer be required in PAMS networks. The District currently operates two LAPs in support of the PAMS program, those being at the Tracy and Visalia-Airport air monitoring sites. Although the information the LAPs provided has been useful for air quality forecasting and modeling purposes, their operation and maintenance has proven to be cost prohibitive and burdensome. As an alternative, the District may invest in other measurement equipment that will provide similar information, but at a much lower cost.

---

<sup>1</sup> Kurpius, Meredith. Letter to CARB. 2 May. 2016. TS

### **Visalia-Airport Site**

The Visalia-Airport site in Tulare County currently only measures meteorology as well as parameters measured by the LAP on site. Since the Visalia-Airport site exists primarily to support the PAMS program through the operation of its LAP, should the LAP be discontinued as discussed above, the District may also consider closing down the site in its entirety as it will no longer be required for the PAMS network or the network as a whole. Since meteorology is already measured at the nearby Visalia-Church air monitoring site, the data being collected could be considered redundant in nature. Should the District proceed with a plan to close the site, we will work closely with ARB and EPA through this process.

### **Progress report on Bakersfield-Westwind Near-Road NO<sub>2</sub> site**

At this time, the District meets or exceeds all near-road NO<sub>2</sub> requirements. The District is being proactive by building a second near-road NO<sub>2</sub> site in the Bakersfield CBSA long before it is required considering the population growth rate. Construction of Bakersfield-Westwind near-road NO<sub>2</sub> site has started and is planned to be operational by the beginning of 2018. This planned site is located just north of Truxton Avenue on the east side of Highway 99.

### **Further Deployment of Teledyne 602 Units in the Network**

To continue the success of the deployment of the Teledyne 602 analyzers in the air monitoring network, the District is planning to deploy additional units to continue to streamline its operations. These additional units are being considered to be placed at the sites of Manteca, Tracy, Madera-City, Hanford, and Bakersfield-Golden/M. Should the District proceed with expanding the usage of the Teledyne 602 unit in the network, we will work closely with ARB and EPA through this process.

### **All other Sites**

No other changes are proposed at this time to any other sites in the District.

**Table 32 Summary of Proposed Changes to the Air Monitoring Network**

<b>CBSA: Stockton</b>	<b>County: San Joaquin</b>	
<b>CBSA: Fresno</b>	<b>County: Fresno</b>	
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Manteca	SJVAPCD	Potential Teledyne 602 deployment
Tracy–Airport	SJVAPCD	Potential LAP closure Potential Teledyne 602 deployment
<b>CBSA: Modesto</b>	<b>County: Stanislaus</b>	
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Modesto–14th St	CARB	None
Turlock	SJVAPCD	None
<b>CBSA: Merced</b>	<b>County: Merced</b>	
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Merced–Coffee	SJVAPCD	None
Merced–M St	SJVAPCD	None
<b>CBSA: Madera</b>	<b>County: Madera</b>	
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Madera–City	SJVAPCD	Potential Teledyne 602 deployment
Madera–Pump Yard	SJVAPCD	None
<b>CBSA: Fresno</b>	<b>County: Fresno</b>	
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Tranquillity	SJVAPCD	None
Fresno–Sky Park	SJVAPCD	None
Clovis–Villa	SJVAPCD	None
Fresno–Garland	CARB	None
Fresno–Drummond	SJVAPCD	None
Fresno–Pacific	SJVAPCD	None
Fresno–Foundry (near-road)	SJVAPCD	None
Parlier	SJVAPCD	None
<b>CBSA: Kings</b>	<b>County: Kings</b>	
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Hanford–Irwin	SJVAPCD	Potential Teledyne 602 deployment
Corcoran–Patterson	SJVAPCD	None

**Table 32 Summary of Proposed Changes to the Air Monitoring Network (cont'd)**

<b>CBSA: Visalia–Porterville</b>		<b>County: Tulare</b>
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Visalia–Airport	SJVAPCD	Potential LAP and site closure
Visalia–Church St	CARB	None
Sequoia–Lower Kaweah	NPS	None
Sequoia–Ash Mountain	NPS	None
Porterville	SJVAPCD	None
<b>CBSA: Bakersfield</b>		<b>County: Kern (Valley Portion Only)</b>
<b>Site Name</b>	<b>Operating Agency</b>	<b>Planned Changes</b>
Shafter	Shared	None
Oildale	CARB	Operation of the FEM PM <sub>10</sub> and PM <sub>2.5</sub> monitors has been suspended as of 8/28/2015. Since then the FRM PM <sub>10</sub> monitor was reinstalled. CARB will replace the FRM PM <sub>10</sub> monitor with a FEM PM <sub>10</sub> monitor after the safety repair construction is completed.
Arvin–Di Giorgio	CARB	A permanent air monitoring shelter may soon be built since EPA approved CARB's relocation request for monitoring in Arvin.
Bakersfield–California	CARB	None
Bakersfield–Golden State/M St	SJVAPCD	Potential Teledyne 602 deployment
Bakersfield–Westwind (near-road)	SJVAPCD	Construction of this site has started and should become operational by January 2018
Bakersfield–Muni	SJVAPCD	None
Bakersfield–Airport (Planz)	CARB	None
Edison	CARB	None
Maricopa	SJVAPCD	None
Lebec	SJVAPCD	None

## DATA SUBMISSION REQUIREMENTS

Air Quality and Precision data are required to be submitted to EPA 90 days after the end of the calendar quarter once all air quality assurance checks are completed. Accuracy data is submitted to EPA by CARB as part of their scheduled audits. CARB is responsible for certifying data from all CARB-operated air monitoring sites, as well as weighing and certifying filter-based measurements from District operated sites. The measurements are weighed at CARB's laboratory in Sacramento, CA. For information on CARB's data certification, see CARB's air monitoring network plan at <http://www.arb.ca.gov/aqd/amnr/amnr.htm>. The District is responsible for certifying data from all District-operated air monitoring sites. **The District certified the 2016 data on March 30, 2017.**



**ACRONYMS AND ABBREVIATIONS**

AIRS:	Aerometric Information Retrieval System
AQI:	Air Quality Index
AQS:	Air Quality System
CARB:	California Air Resources Board
ARM:	Approved Regional Method
BAM:	Beta Attenuation Monitor
CAA:	Clean Air Act
CBSA:	Core-Based Statistical Area
CCOS:	Central California Ozone Study
CFR:	Code of Federal Regulations
CRPAQS:	California Regional Particulate Air Quality Study
CO:	Carbon Monoxide
CO <sub>2</sub> :	Carbon Dioxide
CSA:	Combined statistical area
District:	San Joaquin Valley Air Pollution Control District
EBAM:	Environmental Beta Attenuation Monitor
EPA:	U.S. Environmental Protection Agency
FEM:	Federal Equivalent Method
FIPS:	Federal information processing standard
FR:	Federal Register
FRM:	Federal Reference Method
GHG:	Green House Gases
LAP:	Lower Air Profiler
MSA:	Metropolitan statistical area
NAAQS:	National Ambient Air Quality Standard
NCore:	National Core
NMOC:	Non-Methane Organic Compounds
NO <sub>2</sub> :	Nitrogen Dioxide
NOAA:	National Oceanic and Atmospheric Administration
NO <sub>x</sub> :	Oxides of Nitrogen
NO <sub>y</sub> :	Reactive Nitrogen
NPS:	National Park Service
O <sub>3</sub> :	Ozone
PAMS:	Photochemical Assessment Monitoring Station
Pb:	Lead
PM:	Particulate Matter
PM <sub>2.5</sub> :	Particulate Matter 2.5 microns or less in diameter
PM <sub>10</sub> :	Particulate Matter 10 microns or less in diameter
SLAMS:	State and Local Air Monitoring Station
SJV:	San Joaquin Valley
SJVAPCD:	San Joaquin Valley Air Pollution Control District
SMS:	Smoke Management System
SO <sub>2</sub> :	Sulfur Dioxide
SPM:	Special Purpose Monitor
STN:	Speciated Trends Network
TEOM:	Tapered Element Oscillating Microbalance
TSP:	Total Suspended Particles
Valley:	San Joaquin Valley
VOC:	Volatile Organic Compounds

This page is intentionally blank.

**APPENDIX A:**

**Air Monitoring Site Descriptions**


This page is intentionally blank.

## Stockton-Hazelton

The Stockton-Hazelton monitoring site is operated by CARB and is located in the Stockton, CA metropolitan area. It began operating in June 1976. The purpose of the site is to monitor representative concentrations of ozone, PM<sub>2.5</sub>, and PM<sub>10</sub> in an urban area. The site also monitors CO, NO<sub>2</sub>, toxics, and meteorology.

Site name:	Stockton–Hazelton
AQS ID:	06-077-1002
County:	San Joaquin
Street Address:	1601 E. Hazelton St., Stockton CA 95205
Geographic Coordinates:	37.9507 N, -121.2689 W
Distance to road (meters):	62 m (north)
Traffic Count (AADT, Year):	4,000 / 2014*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Stockton

\*- Traffic ADT volume estimated by City of Stockton Public Works Traffic Engineering Division

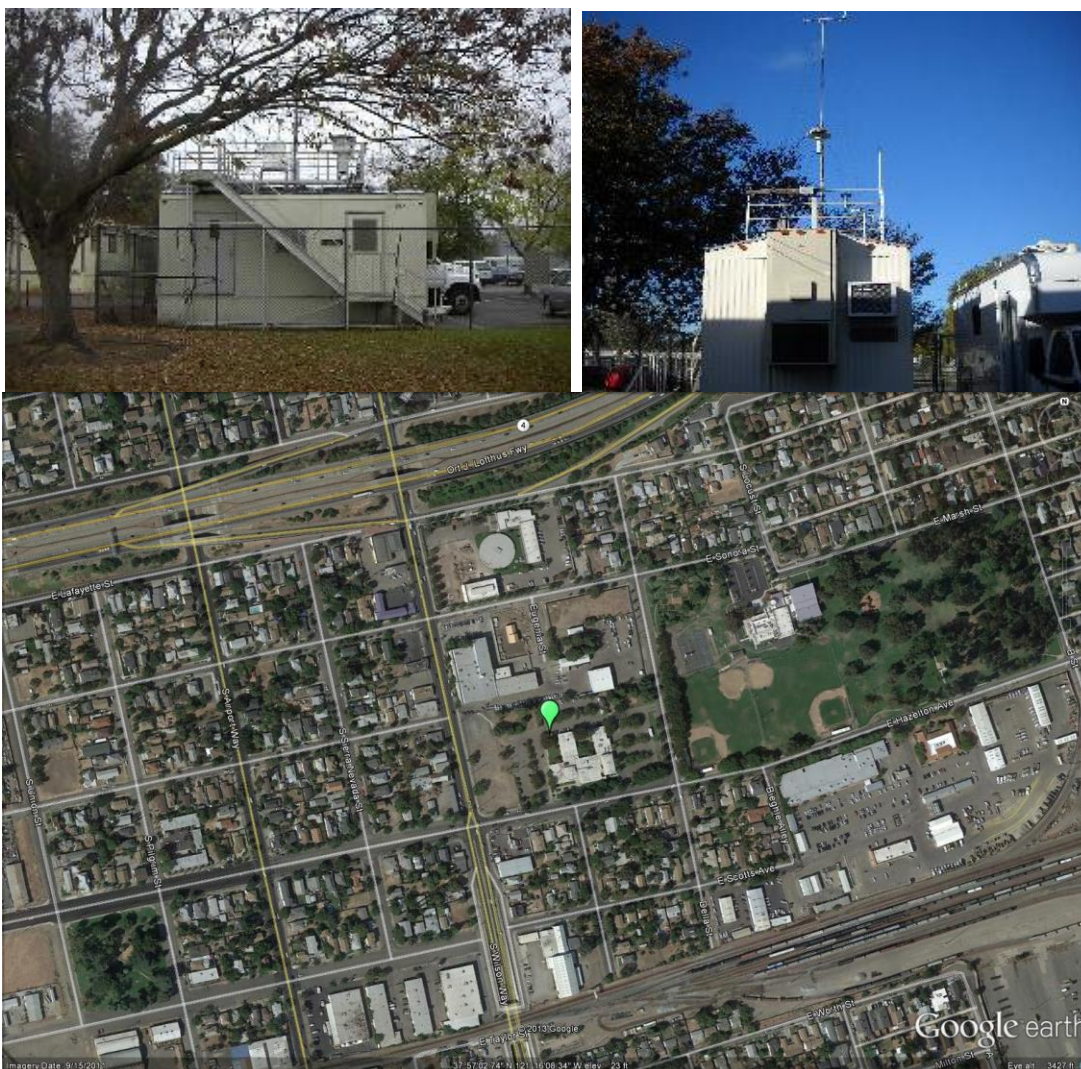



## Manteca

The Manteca monitoring site is located in Manteca, CA and operated by SJVAPCD. It became operational in November 2010. The purpose of the site is to monitor representative concentrations of PM<sub>2.5</sub> and PM<sub>10</sub> from upwind and nearby urban areas. The site also monitors meteorology.

Site name:	Manteca
AQS ID:	06-077-2010
County:	San Joaquin
Street Address:	530 Fishback Rd., Manteca CA 95337
Geographic Coordinates:	37.7933 N, -121.2477 W
Distance to road (meters):	12 m (west)
Traffic Count (AADT, Year):	13,383 / 2014*
Ground Cover:	Paved, vegetative
Representative Statistical Area (CBSA):	Stockton

\* - Average Daily Traffic count for nearest roads: Yosemite Ave and Airport Way  
Source: TJKM Transportation Consultants



## Tracy-Airport

The Tracy-Airport monitoring site, located in Tracy, CA, was part of a settlement from a lawsuit between the District and CARB that took place in 1995. This air monitoring station was installed for the purpose of monitoring transport of air pollution from the Bay Area to the San Joaquin Valley. The site became operational in 1994 and was operated by CARB until June 1995. The District began operating the site in 1996. The site has been moved several times over the years and became operational at its current location in 2006. The site monitors transport of ozone, NO<sub>2</sub>, PM<sub>2.5</sub>, and PM<sub>10</sub> from upwind and nearby urban areas and is not a NAAQS comparison site. Also, the site measures meteorology, which includes lower air profiler instrumentation.

Site name:	Tracy–Airport
AQS ID:	06-077-3005
County:	San Joaquin
Street Address:	5749 S. Tracy Blvd., Tracy CA 95376
Geographic Coordinates:	37.6826 N, -121.4423 W
Distance to road (meters):	700 m (east)
Traffic Count (AADT, Year):	4,063 / 2014*
Ground Cover:	Dirt and Gravel
Representative Statistical Area (CBSA):	Stockton

\* - Average Daily Traffic count for nearest roads: Linne Rd, Corral Hollow Rd

Source: TJKM Transportation Consultants






**Modesto-14<sup>th</sup> St**

The Modesto-14<sup>th</sup> St monitoring site is operated by CARB and is located in the Modesto, CA metropolitan area. It began operating in January 1981. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, and PM<sub>10</sub> in local and upwind urban areas. The site also monitors CO and meteorology.

Site name:	Modesto-14 <sup>th</sup> St
AQS ID:	06-099-0005
County:	Stanislaus
Street Address:	814 14th Street, Modesto CA 95354
Geographic Coordinates:	37.6421 N, -120.9942 W
Distance to road (meters):	50 m (southwest)
Traffic Count (AADT, Year):	124,000 / 2014*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Modesto

\* - Traffic count for nearest roads: H Street / Rte 99, Source: Caltrans 2014 AADDT

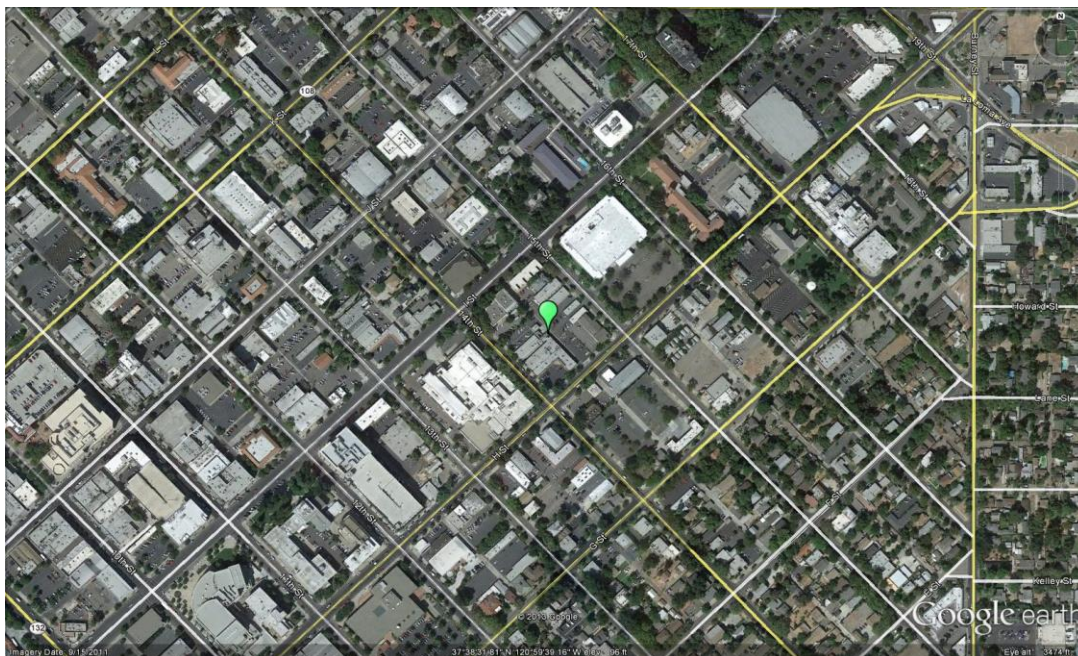




## Turlock

The Turlock monitoring site is operated by SJVAPCD and is located in Turlock, CA. It began operating in April 1992. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, and PM<sub>10</sub> from upwind urban areas. The site also monitors NO<sub>2</sub>, and meteorology.

Site name:	Turlock
AQS ID:	06-099-0006
County:	Stanislaus
Street Address:	900 S. Minaret St., Turlock CA 95380
Geographic Coordinates:	37.4880 N, -120.8360 W
Distance to road (meters):	40 m (northeast)
Traffic Count (AADT, Year):	7,186 / 2015*
Ground Cover:	Gravel
Representative Statistical Area (CBSA):	Modesto

\* - Minaret Street/Golden State Blvd., Source: City of Turlock Engineering Division

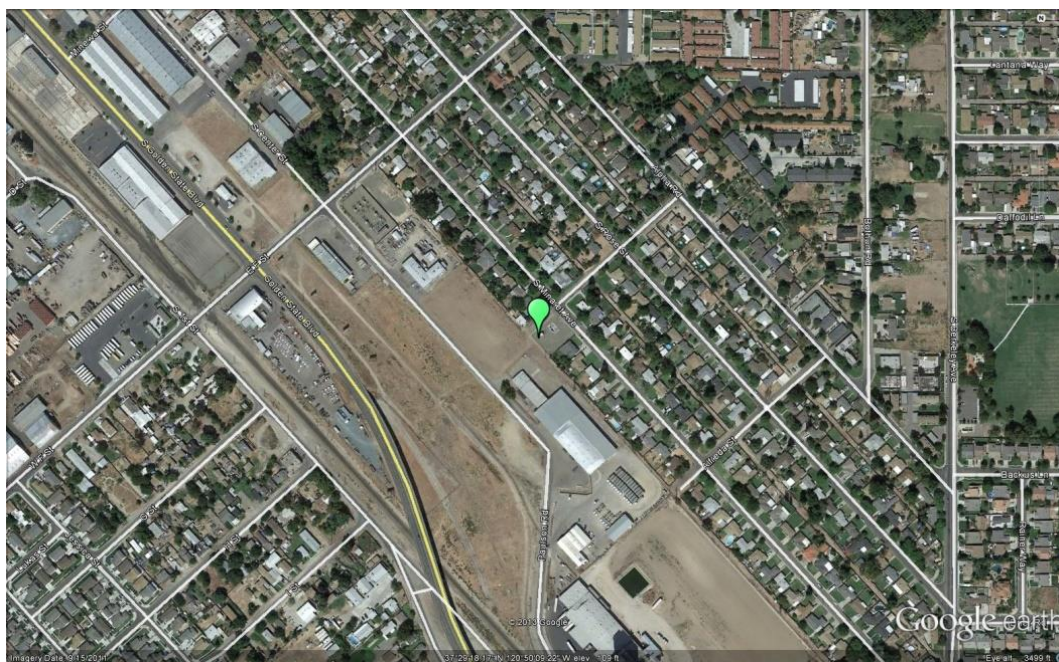




## Merced-M St

The Merced-M St monitoring site is operated by SJVAPCD and is located in Merced, CA. It began operating in April 1999. The purpose of the site is to monitor representative concentrations of PM<sub>2.5</sub> and PM<sub>10</sub> responses from upwind urban areas.

Site name:	Merced—M St
AQS ID:	06-047-2510
County:	Merced
Street Address:	2334 M Street, Merced CA 95340
Geographic Coordinates:	37.3086 N, -120.4800 W
Distance to road (meters):	55 m (northwest)
Traffic Count (AADT, Year):	51,000 / 2014*
Ground Cover:	Paved, gravel
Representative Statistical Area (CBSA):	Merced

\*- Traffic count for nearest roads: R Street/Rte 99, Source: Caltrans 2014 AADT

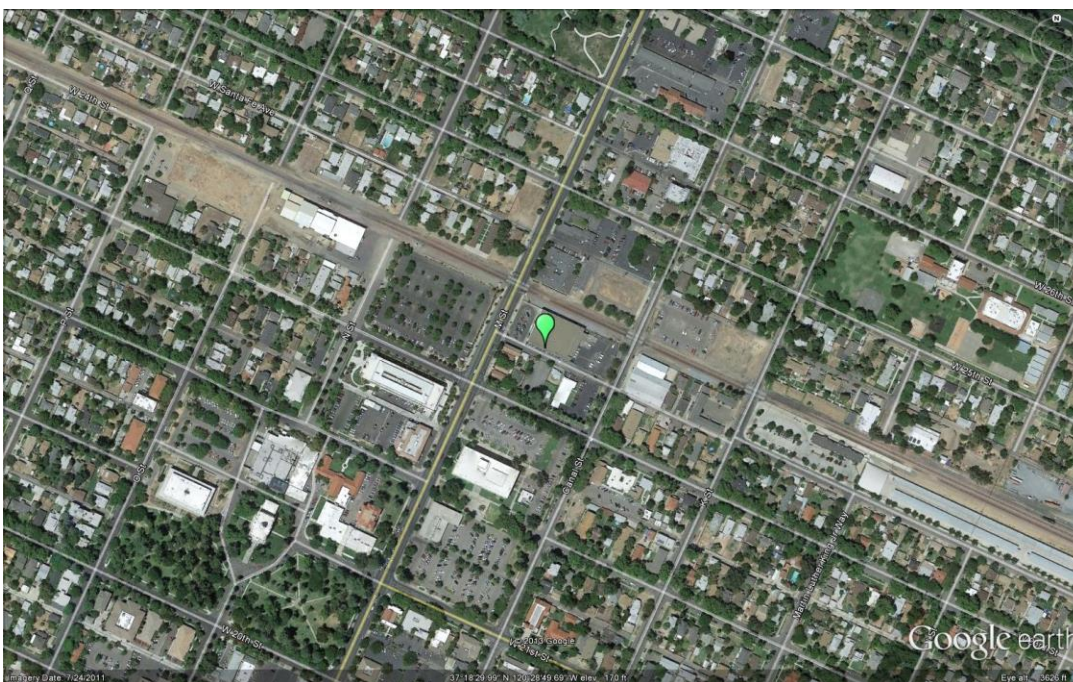

## Merced-Coffee

The Merced-Coffee monitoring site is operated by SJVAPCD and is located in the Merced, CA. It began operating in October 1991. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, and PM<sub>10</sub> responses from upwind urban areas. The site also monitors, NO<sub>2</sub>, and meteorology.

Site name:	Merced–Coffee
AQS ID:	06-047-0003
County:	Merced
Street Address:	385 S. Coffee St., Merced CA 95340
Geographic Coordinates:	37.2816 N, -120.4340 W
Distance to road (meters):	15 m (east)
Traffic Count (AADT, Year):	42,500 / 2014*
Ground Cover:	Vegetative, dirt and gravel
Representative Statistical Area (CBSA):	Merced

\*- Traffic count for nearest roads: Childs Avenue/Rte 99, Source: Caltrans 2014 AADT






## Madera-City

The Madera-City monitoring site is operated by the SJVAPCD and is located in the city of Madera. It began operating in June 2010. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, PM<sub>10</sub>, and meteorology.

Site name:	Madera–City
AQS ID:	06-039-2010
County:	Madera
Street Address:	28261 Avenue 14, Madera CA 93638
Geographic Coordinates:	36.9532 N, -120.0342 W
Distance to road (meters):	70 m (south)
Traffic Count (AADT, Year):	751 / 2015*
Ground Cover:	Paved, dirt, and vegetative
Representative Statistical Area (CBSA):	Madera

\* - Traffic count for nearest roads: Avenue 14 west of Road 29, westbound trips per hour in 24 hours. Source: Madera County Transportation Commission 2015 Traffic Volumes Report.

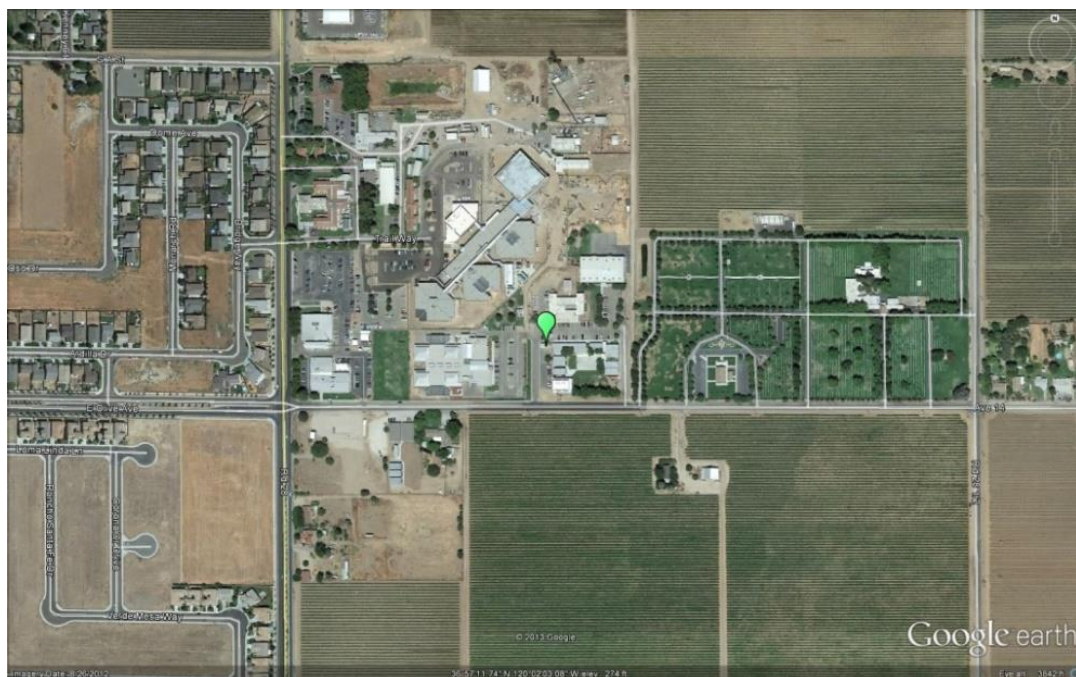

## Madera-Pump Yard

The Madera-Pump Yard Street monitoring site is operated by SJVAPCD and is located in southern Madera County. It began operating in July 1997. This site was established as a PAMS Type 1 site, located in an area upwind of Fresno and not to be influenced by upwind or local ozone precursor emissions. In addition to ozone, this site also monitors NO<sub>2</sub>, NMH and speciated-VOC, and meteorology for the PAMS program.

Site name:	Madera-Pump Yard
AQS ID:	06-039-0004
County:	Madera
Street Address:	Ave. 8 and Road 29 1/2, Madera CA 93637
Geographic Coordinates:	36.867125 N, -120.010158 W
Distance to road (meters):	20 m (west)
Traffic Count (AADT, Year):	2,040 / 2015*
Ground Cover:	Dirt, paved
Representative Statistical Area (CBSA):	Madera

\*- Traffic count for nearest roads: Avenue 7 west of Rte 99, westbound trips per hour in 24 hours.  
Source: Madera County Transportation Commission 2015 Traffic Volumes Report.






## Tranquillity

The Tranquillity monitoring site is located in western Fresno County. It began operating in November 2009 and is operated by the SVAPCD. The purpose of this site is to monitor representative background and rural pollutant concentrations of ozone and PM2.5. The site also monitors meteorology.

Site name:	Tranquillity
AQS ID:	06-019-2009
County:	Fresno
Street Address:	32650 W. Adams, Tranquillity CA 93668
Geographic Coordinates:	36.6008 N, -120.3822 W
Distance to road (meters):	200 m (south)
Traffic Count (AADT, Year):	680 / 2013*
Ground Cover:	Dirt, vegetative
Representative Statistical Area (CBSA):	Fresno

\*- Raw traffic count for nearest roads: Northbound Derrick Avenue north of Kamm Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.

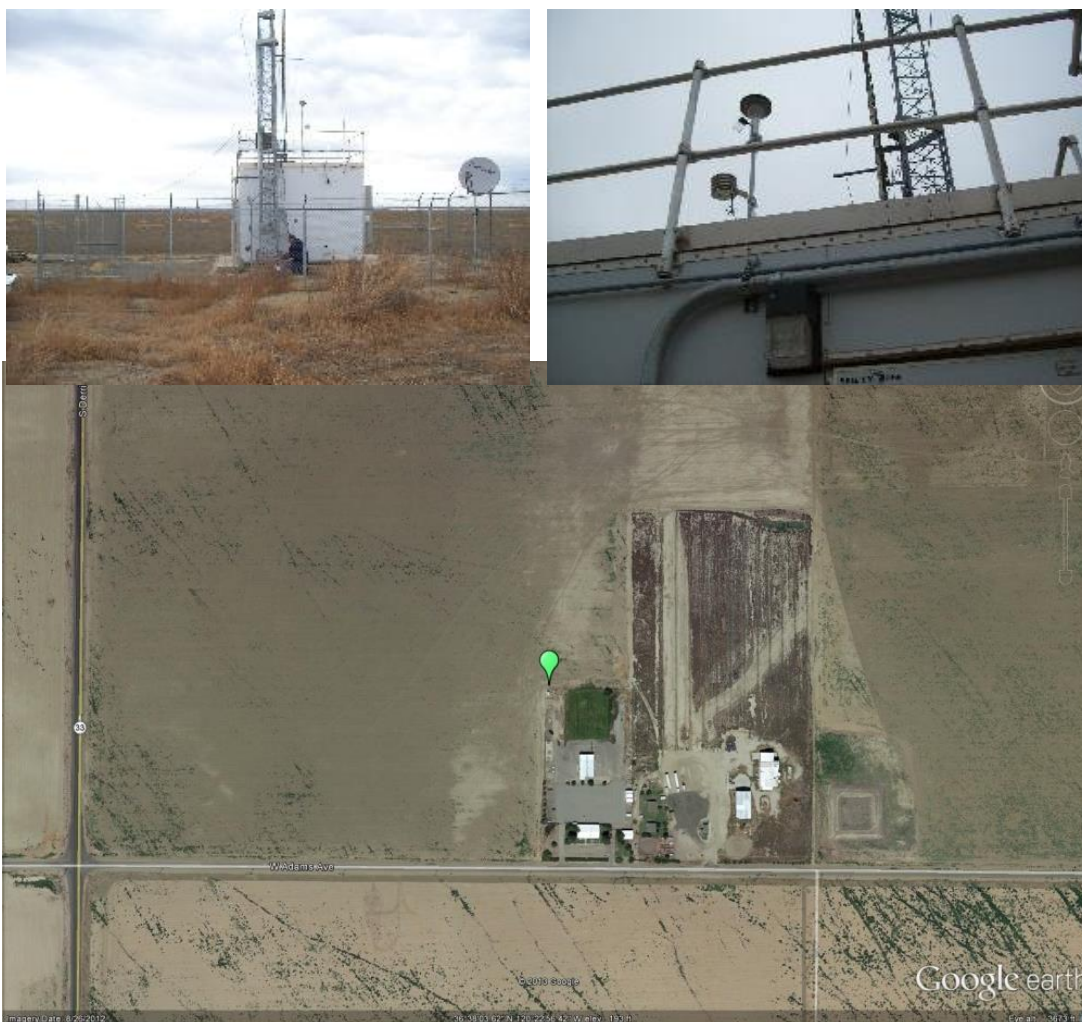

## Fresno-Sky Park

The Fresno-Sky Park monitoring site is operated by SJVAPCD and is located in the Fresno, CA metropolitan area. It began operating in July 1986. The purpose of the site is to monitor representative concentrations of hourly ozone responses in an urban area. In addition to ozone, the site also monitors NO<sub>2</sub>, and meteorology.

Site name:	Fresno–Sky Park
AQS ID:	06-019-0242
County:	Fresno
Street Address:	4508 Chennault Ave, Fresno CA 93722
Geographic Coordinates:	36.8405 N, -119.8740 W
Distance to road (meters):	12 m (west)
Traffic Count (AADT, Year):	750 / 2012*
Ground Cover:	Gravel, dirt
Representative Statistical Area (CBSA):	Fresno

\*- Raw traffic count in a 24-hour period for nearest roads: Spruce Avenue east of Milburn Avenue.  
Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.





## Clovis-Villa

The Clovis-Villa monitoring site is operated by SJVAPCD and is located in the northeastern portion of the Fresno, CA metropolitan area. It began operating in September 1990. This site is a PAMS Type 2 site, a site intended to measure maximum ozone precursor emissions. In addition to ozone, the site also monitors PM<sub>2.5</sub>, PM<sub>10</sub>, CO, NO<sub>2</sub>, NMH and speciated-VOC, and meteorology for the PAMS program.

Site name:	Clovis–Villa
AQS ID:	06-019-5001
County:	Fresno
Street Address:	908 N. Villa Ave., Clovis CA 93612
Geographic Coordinates:	36.8194 N, -119.7160 W
Distance to road (meters):	260 m (east)
Traffic Count (AADT, Year):	13,890 / 2008* (new counts unavailable)
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Fresno

\*- Raw traffic count in a 24-hour period: Eastbound Bullard Avenue/Villa Avenue intersection, Source: Fresno COGG Fresno County Regional Traffic Monitoring Report 2013.





## Fresno-Garland

The Fresno-Garland monitoring site is a National Core (NCore) site operated by CARB and is located in the Fresno, CA metropolitan area. It began operating in December 2011. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, and PM<sub>10</sub> in an urban area. The site also monitors CO, NO<sub>2</sub>, NO<sub>y</sub>, SO<sub>2</sub>, Lead, toxics, and meteorology.

Site name:	Fresno–Garland
AQS ID:	06-019-0011
County:	Fresno
Street Address:	3727 N. First St., Ste.104, Fresno CA 93726
Geographic Coordinates:	36.7853 N, -119.7732 W
Distance to road (meters):	30 m (south)
Traffic Count (AADT, Year):	7,460 / 2011*
Ground Cover:	Gravel covered tar paper with wooden deck walkways
Representative Statistical Area (CBSA):	Fresno

\*- Raw traffic count in a 24-hour period for nearest roads: First Street near Dakota Avenue,  
Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.




## Fresno-Pacific

The Fresno-Pacific monitoring site is operated by SJVAPCD and is located in the Fresno, CA metropolitan area. It began operating in January 2000. The purpose of the site is to monitor representative PM<sub>2.5</sub> concentrations in an urban area.

Site name:	Fresno-Pacific
AQS ID:	06-019-5025
County:	Fresno
Street Address:	1716 Winery, Fresno CA 93727
Geographic Coordinates:	36.7263 N, -119.7330 W
Distance to road (meters):	40 m (east)
Traffic Count (AADT, Year):	5,350 / 2011*
Ground Cover:	Rubber roof coating
Representative Statistical Area (CBSA):	Fresno

\* - Raw traffic count in a 24-hour period for nearest roads: Butler Avenue east of Chestnut Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.

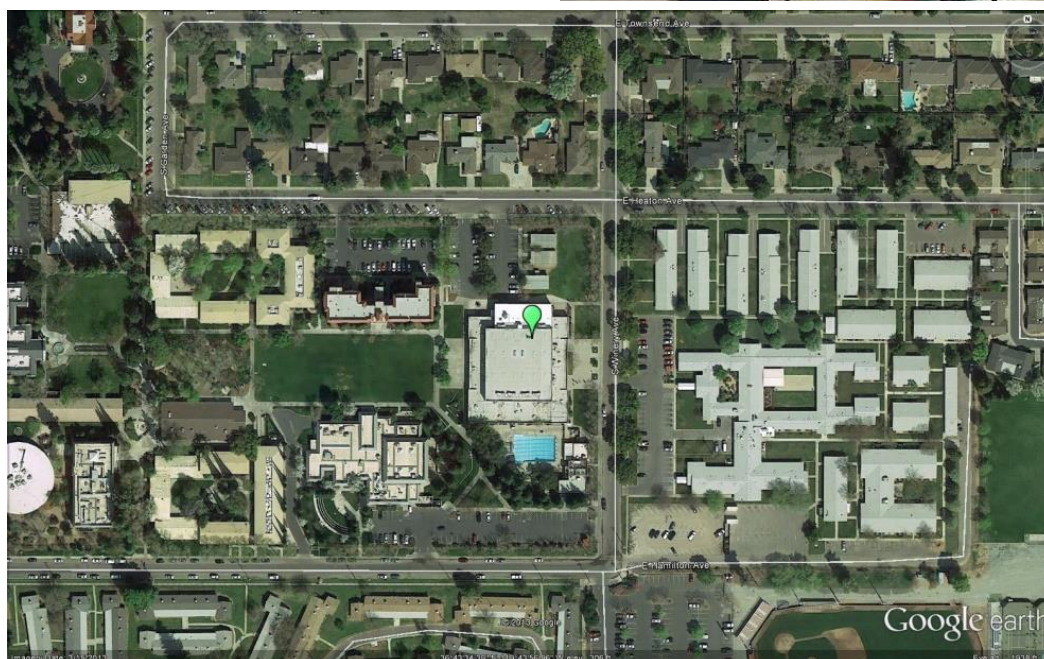




## Fresno-Foundry

The Fresno-Foundry near-road NO<sub>2</sub> monitoring site is operated by SJVAPCD and is located adjacent to Highway 99 in the Fresno, CA metropolitan area. It began operating in January 2016. The purpose of the site is to monitor representative maximum 1-hour NO<sub>2</sub> concentrations near a highly traffic roadway in an urban area. In addition to NO<sub>2</sub>, the site also monitors meteorology.

Site name:	Fresno–Foundry
AQS ID:	06-019-2016
County:	Fresno
Street Address:	2482 Foundry Park Ave, Fresno, CA 93706
Geographic Coordinates:	N 36.710833, W -119.7775
Distance to road (meters):	16 to 19 meters
Traffic Count (AADT, Year):	93,000 AADT (FEAADT 227,505) / 2010*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Fresno

\*- Traffic count for nearest roads: Rte 99 and Jensen Avenue off-ramp. Traffic count source: Caltrans (2010)

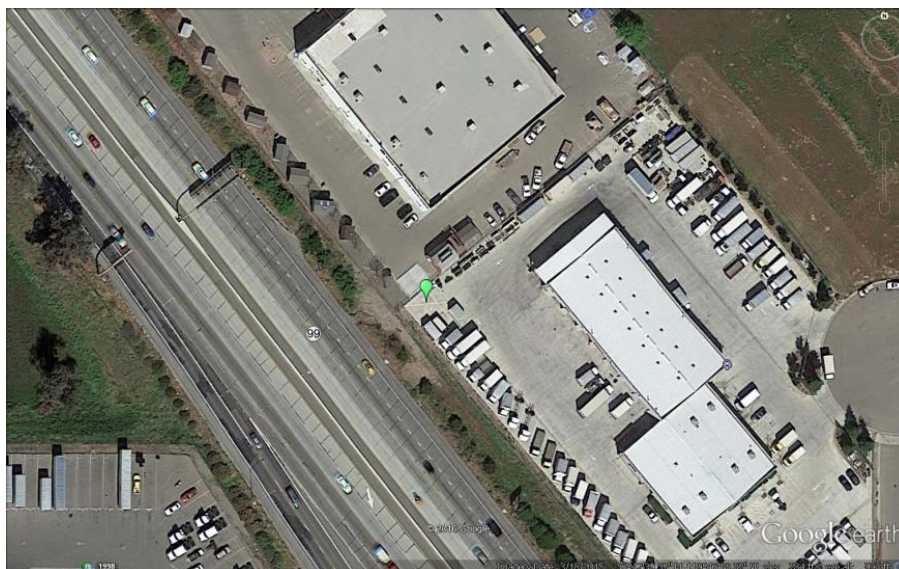


## Fresno-Drummond

The Fresno-Drummond monitoring site is operated by SJVAPCD and is located in the Fresno, CA metropolitan area. It began operating in July 1984. The purpose of the site is to monitor representative concentrations of hourly ozone responses in an urban area. In addition to ozone, the site also monitors PM<sub>10</sub>, NO<sub>2</sub>, and meteorology.

Site name:	Fresno–Drummond
AQS ID:	06-019-0007
County:	Fresno
Street Address:	4706 E. Drummond Street, Fresno CA 93725
Geographic Coordinates:	36.7055 N, -119.7410 W
Distance to road (meters):	50 m (north)
Traffic Count (AADT, Year):	7,110 / 2010*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Fresno

\* - Raw traffic count in a 24-hour period for nearest roads: Jensen Avenue east of Chestnut Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.

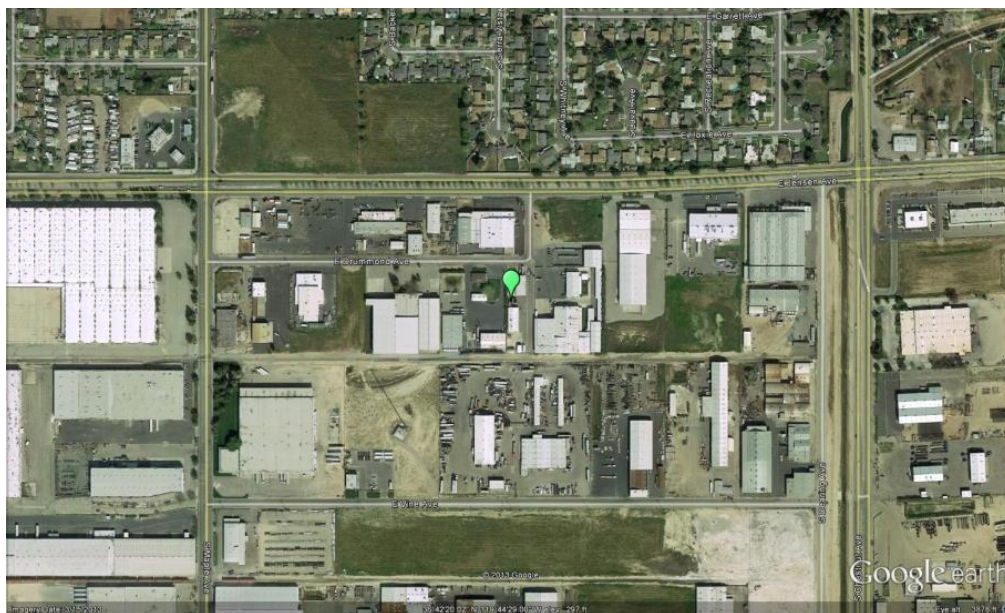



## Parlier

The Parlier monitoring site is operated by SJVAPCD and is located 20 miles southeast of the Fresno, CA metropolitan area. It began operating in March 1983. The purpose of the site, as a PAMS Type 3 site, is to monitor maximum ozone concentrations and ozone responses from upwind urban areas. The site also monitors NO<sub>2</sub>, NMH, and speciated-VOC, and meteorology for the PAMS program.

Site name:	Parlier
AQS ID:	06-019-4001
County:	Fresno
Street Address:	9240 S. Riverbend Ave., Parlier CA 93648
Geographic Coordinates:	36.5972 N, -119.5040 W
Distance to road (meters):	100 m (east)
Traffic Count (AADT, Year):	1,570/2009*
Ground Cover:	Dirt, vegetative
Representative Statistical Area (CBSA):	Fresno

\* - Raw traffic count in a 24-hour period for nearest roads: Lac Jac Ave south of Manning Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.



## Huron

Huron, CA is located in southwestern Fresno County, and is about 40 miles southwest of Fresno, CA, with the coastal mountain range just to the west. North-south air flow is virtually unobstructed. This monitoring site was established in September 2009 in order to comply with Assembly Bill (AB) 841. This site monitors PM<sub>2.5</sub> and meteorology.

Site name:	Huron
AQS ID:	06-019-2008
County:	Fresno
Street Address:	16875 4 <sup>th</sup> St., Huron, CA 93234
Geographic Coordinates:	36.2363 N, -119.7656 W
Distance to road (meters):	100 m (north)
Traffic Count (AADT, Year):	3,250 / 2014*
Ground Cover:	Paved, vegetative
Representative Statistical Area (CBSA):	Fresno

\*- Traffic count for nearest roads: Rte 269/Rte 198, Source: Caltrans 2014





## Hanford-Irwin

The Hanford-Irwin monitoring site is operated by SJVAPCD and is located 51 miles south of the Fresno, CA metropolitan area. The site began operating in October 1993. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, PM<sub>10</sub>, and NO<sub>2</sub> responses from upwind and nearby urban areas. The site also monitors meteorology.

Site name:	Hanford-Irwin
AQS ID:	06-031-1004
County:	Kings
Street Address:	807 S Irwin St, Hanford CA 93230
Geographic Coordinates:	36.3147 N, -119.6440 W
Distance to road (meters):	60 m (east)
Traffic Count (AADT, Year):	9,763 / 2013*
Ground Cover:	Paved, vegetative
Representative Statistical Area (CBSA):	Hanford – Corcoran

\* - Traffic count for nearest roads: Hanford-Armona Rd east of S. Williams St., Source: City of Hanford Administration/Engineering Documents.)



## Corcoran-Patterson

The Corcoran-Patterson monitoring site is operated by SJVAPCD and is located 67 miles south of the Fresno, CA metropolitan area. It began operating in October 1996. The site measures representative concentrations of PM<sub>10</sub> and PM<sub>2.5</sub>. This site also monitors meteorology.

Site name:	Corcoran–Patterson
AQS ID:	06-031-0004
County:	Kings
Street Address:	1520 Patterson Ave, Corcoran CA 93212
Geographic Coordinates:	36.1022 N, -119.5660 W
Distance to road (meters):	30 m (east)
Traffic Count (AADT, Year):	2,965 / 2014*
Ground Cover:	Dirt, gravel
Representative Statistical Area (CBSA):	Hanford – Corcoran

\* - Traffic count for nearest roads: JCT. Rte 43/Rte 137, Source: Caltrans 2014.





## Visalia-Airport

The Visalia-Airport monitoring site is operated by SJVAPCD and serves as a meteorological site monitoring air temperature and relative humidity at the surface. It began reporting official meteorological data in July 1998. A lower atmosphere profiler also operates at the site measuring wind speed and wind direction.

Site name:	Visalia–Airport
AQS ID:	06-107-3000
County:	Tulare
Street Address:	9501 West Airport Drive, Visalia, CA 93277
Geographic Coordinates:	39.3266 N, -119.3984 W
Distance to road (meters):	100 m (west)
Traffic Count (AADT, Year):	56,000 / 2014*
Ground Cover:	Dirt, vegetative
Representative Statistical Area (CBSA):	Visalia – Porterville

\* - Traffic count for nearest roads: JCT. Rte 99/Rte 198 East., Source: Caltrans 2014.



## Visalia-Church St

The Visalia-Church St monitoring site is operated by CARB. It began operating in January 1979. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, and PM<sub>10</sub> from upwind and nearby urban areas. The site also monitors NO<sub>2</sub> and meteorology.

Site name:	Visalia—Church St
AQS ID:	06-107-2002
County:	Tulare
Street Address:	310 N. Church St., Visalia CA 93291
Geographic Coordinates:	36.3325 N, -119.2909 W
Distance to road (meters):	25 m (west)
Traffic Count (AADT, Year):	3,980 / 2014*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Visalia – Porterville

\* - Traffic count for nearest roads: W. Center Ave. between N. Court St. and N. Santa Fe St., Source: City of Visalia Traffic and Engineering.





## Porterville

The Porterville air monitoring site became operational in March 2010 and is operated by the SJVAPCD. The purpose of this site is to monitor ozone, PM<sub>2.5</sub>, and meteorology, and represent air quality levels present near the foothills of the southeastern portion of the Valley.

Site name:	Porterville
AQS ID:	06-107-2010
County:	Tulare
Street Address:	1839 S. Newcomb St., Porterville CA 93257
Geographic Coordinates:	36.0310 N, -119.0550 W
Distance to road (meters):	100 m (south)
Traffic Count (AADT, Year):	2,953 / 2013*
Ground Cover:	Paved, vegetative
Representative Statistical Area (CBSA):	Visalia-Porterville

\* - Traffic count average for two 24-hour periods for nearest roads: Ave 128 west of Road 238,  
Source: Tulare County Association of Governments




## Sequoia-Ash Mountain

The Ash Mountain monitoring station is operated by Sequoia and Kings Canyon National Park and is located at the southern entrance of the Park at 1,500-foot elevation. It began operating in July 1999, though the site has been relocated several times over the years. The site demonstrates the hourly ozone concentrations in the foothills. The site also monitors PM<sub>2.5</sub> and meteorology.

Site name:	Sequoia–Ash Mountain
AQS ID:	06-107-0009
County:	Tulare
Street Address:	Ash Mountain, Sequoia and Kings Canyon National Park 47050 Generals Hwy, Three Rivers, CA 93271
Geographic Coordinates:	36.4894 N, -118.8290 W
Distance to road (meters):	120 m (north)
Traffic Count (AADT, Year):	1,550 / 2014*
Ground Cover:	Dirt, vegetative
Representative Statistical Area (CBSA):	Visalia – Porterville

\* - Rte 198 / Sequoia National Park boundary, Source: Caltrans Back AADT 2014

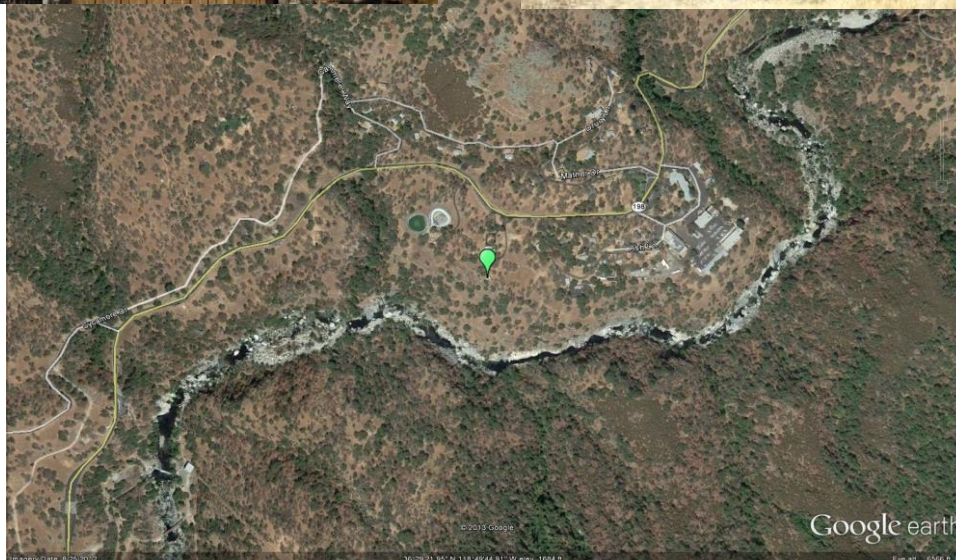




## Sequoia-Lower Kaweah

The Lower Kaweah monitoring station is operated by Sequoia and Kings Canyon National Park and is located at the southern entrance of the Park at 6,200-foot elevation. It began operating in January 1987. The site demonstrates the hourly ozone concentrations in a rural area. The site also monitors meteorology.

Site name:	Sequoia-Lower Kaweah
AQS ID:	06-107-0006
County:	Tulare
Street Address:	Giant Forest, Sequoia National Park, 47050 Generals Highway, Three Rivers, CA 93271
Geographic Coordinates:	36.5661 N, -118.7776 W
Distance to road (meters):	380 m (southeast)
Traffic Count (AADT, Year):	1,550 / 2014*
Ground Cover:	Dirt, vegetation
Representative Statistical Area (CBSA):	Visalia – Porterville

\* - Rte 198 / Sequoia National Park boundary, Source: Caltrans Back AADT 2014

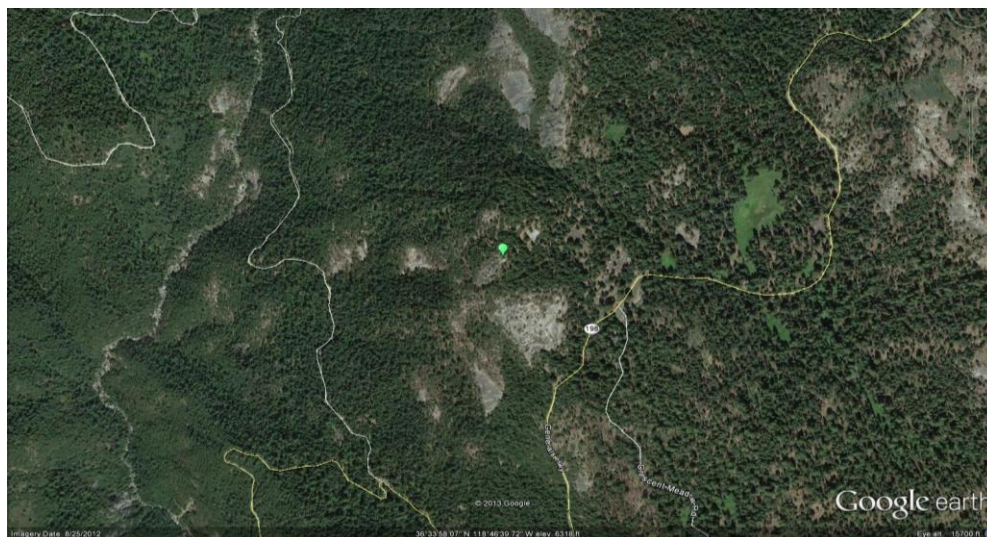


## Shafter

The Shafter monitoring site is a shared site operated by CARB and the SJVAPCD and is located 18 miles northwest of the Bakersfield, CA metropolitan area. It began operating in January 1989. This site was established as a PAMS Type 1 site, located in an area upwind of Bakersfield and not to be influenced by upwind or local ozone precursor emissions. In addition to ozone, the site also monitors NO<sub>2</sub>, NMH, and speciated-VOC and meteorology for the PAMS program.

Site name:	Shafter
AQS ID:	06-029-6001
County:	Kern
Street Address:	578 Walker St, Shafter CA 93263
Geographic Coordinates:	35.5034 N, -119.2726 W
Distance to road (meters):	10 m (southwest)
Traffic Count (AADT, Year):	2,766 / 2015*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for nearest roads: Central Ave and Walker St., Source: Kern Council of Governments.

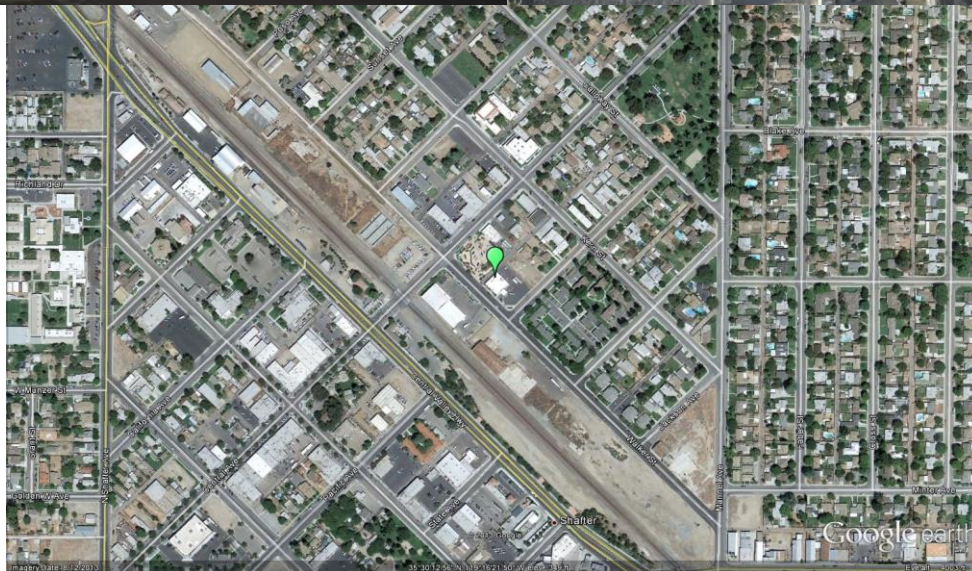




## Oildale

The Oildale monitoring site is operated by CARB and is located 6 miles north of Bakersfield, CA within the metropolitan area. It began operating in January 1980. The purpose of the site is to monitor representative concentrations of hourly ozone concentrations, and PM10. The site also monitors meteorology.

Site name:	Oildale
AQS ID:	06-029-0232
County:	Kern
Street Address:	3311 Manor St, Oildale CA 93308
Geographic Coordinates:	35.4380 N, -119.0167 W
Distance to road (meters):	150 m (northwest)
Traffic Count (AADT, Year):	7,315 / 2016*
Ground Cover:	Dirt, vegetative
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for roads: Manor St. between Day Ave and Felton St., Source: Kern Council of Governments.

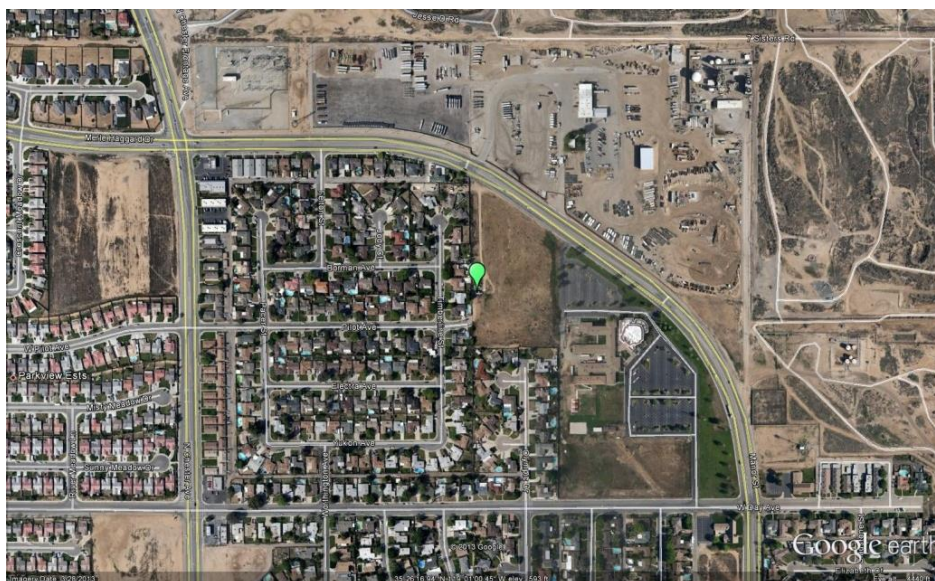

**Bakersfield-Golden / M St**

The Bakersfield–Golden / M St monitoring site is operated by District and is located in the Bakersfield, CA metropolitan area. It began operating in July 2014. The purpose of the site is to monitor representative concentrations of PM<sub>10</sub> and PM<sub>2.5</sub> in an urban area.

Site name:	Bakersfield–Golden / M St
AQS ID:	06-029-0010
County:	Kern
Street Address:	2820 M St., Bakersfield, CA 93301
Geographic Coordinates:	35.385574 N, -119.015009 W
Distance to road (meters):	13 m
Traffic Count (AADT, Year):	4,418 / 2016*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Bakersfield

\*- Traffic count for nearest roads: 30 St. at Golden State Ave., Source: Kern Council of Governments.






## Bakersfield-California

The Bakersfield-California monitoring site is operated by CARB and is located in the Bakersfield, CA metropolitan area. It began operating in March 1994. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>10</sub>, and PM<sub>2.5</sub> in an urban area. The Bakersfield-California site also monitors NO<sub>2</sub>, toxics, and meteorology.

Site name:	Bakersfield–California
AQS ID:	06-029-0014
County:	Kern
Street Address:	5558 California Ave., Bakersfield CA 93309
Geographic Coordinates:	35.3566 N, -119.0626 W
Distance to road (meters):	300 m (south)
Traffic Count (AADT, Year):	33,017 / 2016*
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Bakersfield

\*- Traffic count for roads: California Ave between Stockdale Hwy and Dunsmuir Rd.,  
Source: Kern Council of Governments

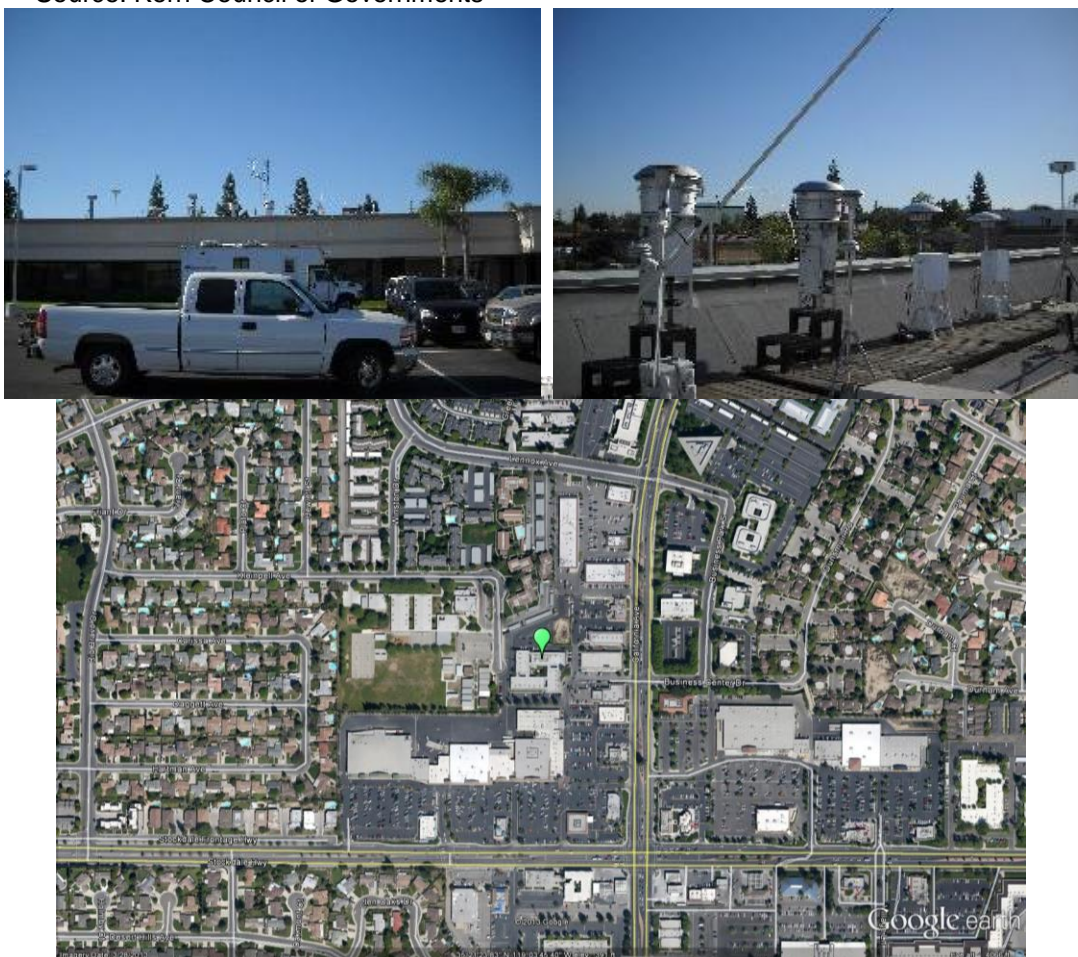

## Bakersfield-Muni

The Bakersfield-Muni site is located in the Bakersfield, CA metropolitan area and is operated by the SJVAPCD. It became operational in June 2012. The site serves as a PAMS Type 2 site, and its purpose is to measure maximum ozone precursor emissions. The site monitors ozone, CO, NO<sub>2</sub>, NMH, and speciated-VOC, and meteorology for the PAMS program.

Site name:	Bakersfield-Muni
AQS ID:	06-029-2012
County:	Kern
Street Address:	2000 South Union Ave., Bakersfield, CA 93307
Geographic Coordinates:	35.3313 N, -119.0000 W
Distance to road (meters):	280 m (west)
Traffic Count (AADT, Year):	21,165 / 2015* 5,039 / 2016**
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for street address): S. Union Ave between E Casa Loma Dr and Watts Dr.

\*\* - Traffic count for road adjacent to monitoring station: Watts Dr between S. Union Ave and Short St.  
Source: Kern Council of Governments





## Bakersfield-Airport (Planz)


The Bakersfield-Airport (Planz) monitoring site is located in the Bakersfield, CA metropolitan area and is operated by CARB. It began operating in September 2000. The purpose of the site is to monitor representative concentrations of PM<sub>2.5</sub> from upwind and nearby urban areas.

Site name:	Bakersfield–Airport (Planz)
AQS ID:	06-029-0016
County:	Kern
Street Address:	401 E. Planz Rd., Bakersfield CA 93307
Geographic Coordinates:	35.3246 N, -118.9976 W
Distance to road (meters):	500 m (west)
Traffic Count (AADT, Year):	17,536 / 2016* 5,039 / 2016**
Ground Cover:	Paved
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for nearest cross street: S. Union Ave between E. Planz Rd and E White Lane.

\*\* - Traffic count for monitoring station's street address.

Source: Kern Council of Governments

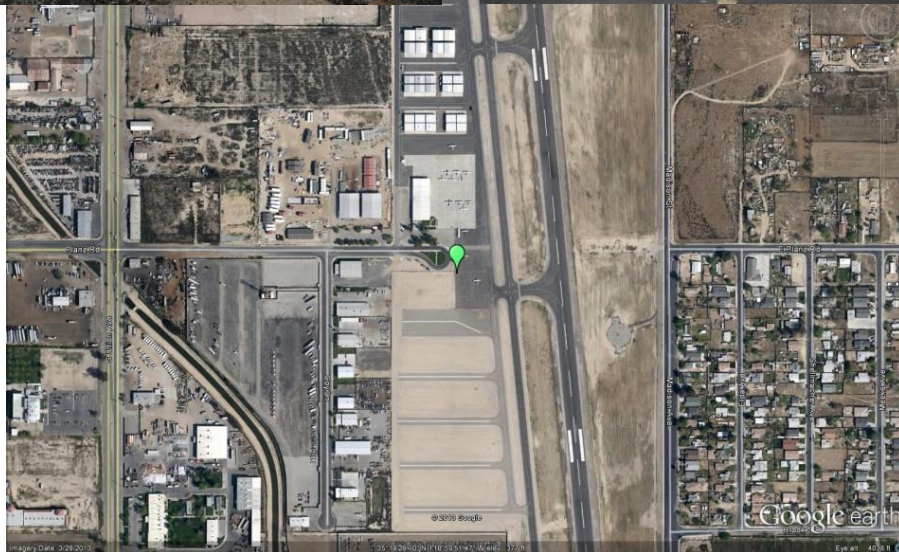

## Edison

The Edison monitoring site is operated by CARB and is located 9 miles east of the Bakersfield, CA metropolitan area. It began operating in January 1980. The purpose of the site is to monitor representative concentrations of hourly ozone from upwind and nearby urban areas. The site also monitors NO<sub>2</sub> and meteorology.

Site name:	Edison
AQS ID:	06-029-0007
County:	Kern
Street Address:	Johnson Farm-Shed Rd, Edison CA 93320
Geographic Coordinates:	35.3456 N, -118.8518 W
Distance to road (meters):	450 m (south)
Traffic Count (AADT, Year):	3,830 / 2016*
Ground Cover:	Dirt, vegetative
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for nearest roads: Comanche Dr. and Edison Hwy.,  
Source: Kern Council of Governments.





## Arvin-Di Giorgio

The Arvin-Di Giorgio site is located 18 miles southeast of the Bakersfield, CA metropolitan area. The site began operating in November 2009. It currently monitors ozone and meteorology. The purpose of this site will be to measure emissions downwind of the Bakersfield urban area, and possibly serve as a PAMS Type 3 site which will monitor maximum ozone concentrations and transport from upwind urban areas, should PAMS monitoring continue in this area. PAMS equipment at the Arvin-Di Giorgio site may be installed when space becomes available.

Site name:	Arvin-Di Giorgio
AQS ID:	06-029-5002
County:	Kern
Street Address:	19405 Buena Vista Blvd, Arvin CA 93203
Geographic Coordinates:	35.2391 N, -118.7886 W
Distance to road (meters):	10 m (east)
Traffic Count (AADT, Year):	581 / 2016*
Ground Cover:	Dirt, vegetative
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for Buena Vista Blvd east of Tejon Hwy., Source: Kern Council of Governments.




## Maricopa

The Maricopa monitoring site is operated by the SJVAPCD and is located 45 miles southwest of the Bakersfield, CA metropolitan area. It began operating in July 1987. The purpose of the site is to monitor representative concentrations of hourly ozone in a rural area. The site also monitors meteorology.

Site name:	Maricopa
AQS ID:	06-029-0008
County:	Kern
Street Address:	755 Stanislaus St., Maricopa CA 93352
Geographic Coordinates:	35.0515 N, -119.4026 W
Distance to road (meters):	500 m (northwest)
Traffic Count (AADT, Year):	255 / 2016*
Ground Cover:	Gravel, dirt, vegetative
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for nearest roads: Union St. at California St., Source: Kern Council of Governments.

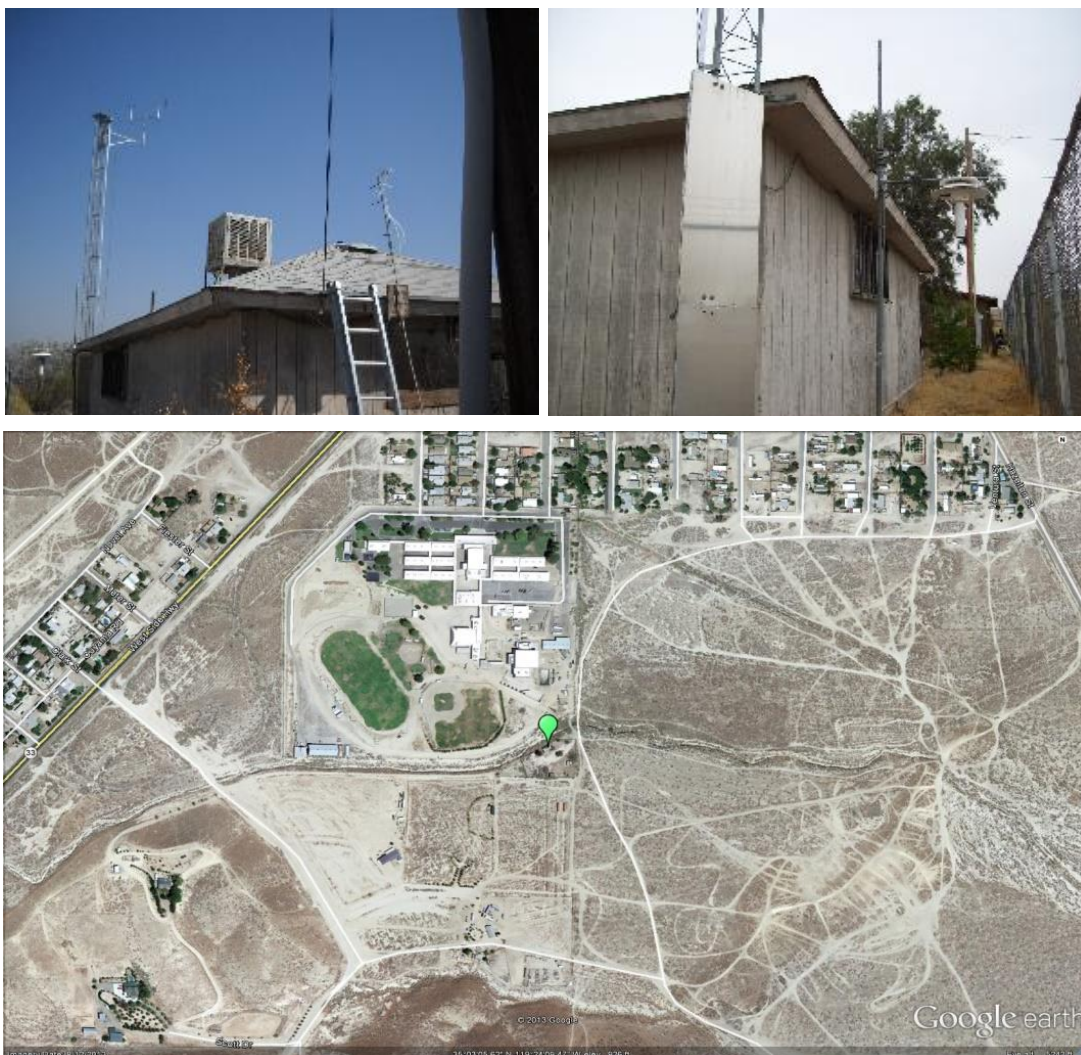



## Lebec

The Lebec monitoring station was initiated by the Tejon Ranch in 2004, and the District assumed responsibility for this site as of January 2009. This site allows the District to better understand pollution impacts in the southern San Emigdio Mountains. The site measures PM<sub>2.5</sub> and meteorological parameters. This site is used for residential wood-burning declarations for the Greater Frazier Park Area.

Site name:	Lebec
AQS ID:	06-029-2009
County:	Kern
Street Address:	1277 Beartrap Road, Lebec, CA 93243
Geographic Coordinates:	34.8415 N, -118.8610 W
Distance to road (meters):	300 m (west)
Traffic Count (AADT, Year):	1,967 / 2016*
Ground Cover:	Gravel, vegetative
Representative Statistical Area (CBSA):	Bakersfield

\* - Traffic count for nearest roads: Lebec Rd and Interstate 5, Source: Kern Council of Governments.



## Tribal Sites


Since the tribal sites are operated under the Tribal Authority Rule which is essential to tribal implementation of the Clean Air Act, and is not part of the District's jurisdiction, detailed site information for tribal monitors will not be provided in this plan.

### Picayune Rancheria

The Picayune Rancheria monitoring site is located on Tribal land in Coarsegold, CA in Madera County and is operated by the Chukchansi Indians. The site began operating in August 2011. The purpose of the site is to monitor representative concentrations of ozone, PM<sub>10</sub>, and PM<sub>2.5</sub> on the reservation. The site also monitors meteorology.

Site name:	Picayune Rancheria
AQS ID:	06-039-0500
County:	Madera
Street Address:	46575 Road 417, Coarsegold, CA 93614
Geographic Coordinates:	37.2136 N, -119.6990 W
Distance to road (meters):	50 m (west)
Traffic Count (AADT, Year):	11,000 / 2014*
Ground Cover:	Dirt, paved
Representative Statistical Area (CBSA):	Madera

\* - Traffic count for Rte 41 / Road 417, Source: Caltrans 2014 Ahead AADT

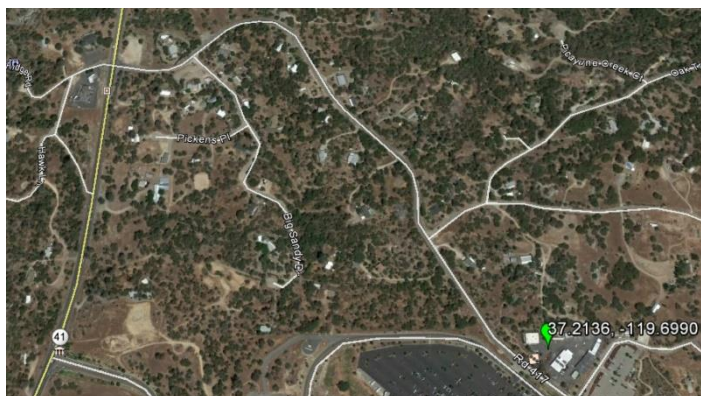



## Table Mountain Rancheria

The Table Mountain Air Monitoring Station is located on Tribal land near Millerton Lake in Fresno County and is operated by the Monache tribe and Foothill Yokut Indians. The site began operating in September 2015. The purpose of the site is to monitor representative concentrations of hourly ozone, PM<sub>2.5</sub>, and PM<sub>10</sub> responses from upwind and nearby urban areas. The site also monitors meteorology.

Site name:	Table Mountain Air Monitoring Station
AQS ID:	06-019-0500
County:	Fresno
Street Address:	Millerton Road and Winchell Road, Friant, CA 93626
Geographic Coordinates:	36.985119 N, -119.658339 W
Distance to road (meters):	Unknown
Traffic Count (AADT, Year):	44,500 / 2014*
Ground Cover:	Dirt
Representative Statistical Area (CBSA):	Fresno-Madera

\* - Traffic count for nearest roads: Rte 41 and Friant Rd, Source: Caltrans 2014 Ahead AADT.





## Santa Rosa Rancheria

The Santa Rosa Rancheria monitoring site is located on Tribal land in Lemoore, CA in Kings County and is operated by the Tachi-Yokut tribe. The site began operating in August 2006. The purpose of the site is to monitor representative concentrations of hourly ozone and PM10 responses from upwind and nearby urban areas. The site also monitors meteorology.

Site name:	Santa Rosa Rancheria
AQS ID:	06-031-0500
County:	Kings
Street Address:	17225 Jersey Avenue, Lemoore, CA 93245
Geographic Coordinates:	36.2332 N, -119.7662 W
Distance to road (meters):	40 m (south)
Traffic Count (AADT, Year):	3,670 / 2006*
Ground Cover:	Dirt, paved
Representative Statistical Area (CBSA):	Hanford-Corcoran

\* - Traffic count for nearest roads: Kansas Avenue between 18<sup>th</sup> Avenue and 15<sup>th</sup> Avenue, Source: County of Kings 2035 General Plan - Kings County Association of Governments 2006-07 traffic data.

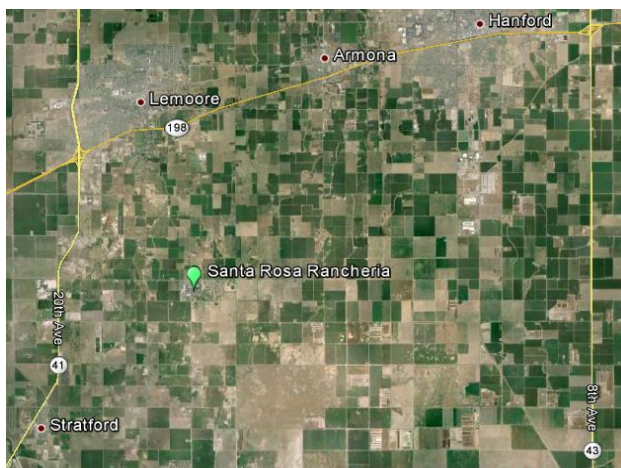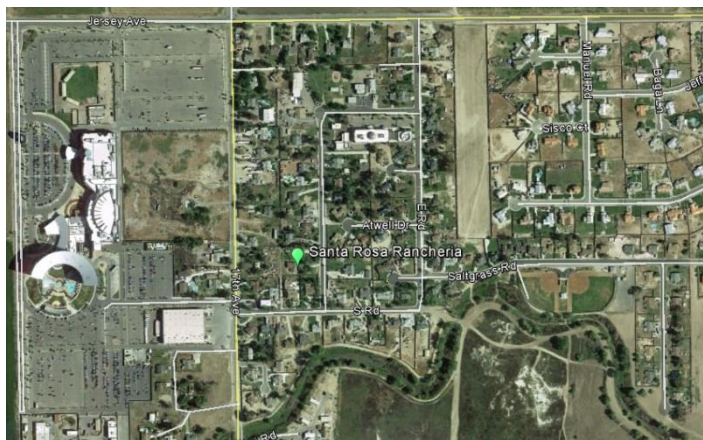

**Appendix B:**  
**Detailed Site Information**

This page is intentionally blank.

## List of Abbreviations

Site Type	
PE	Population Exposure
HC	Highest Concentration
Max PEI	Max Precursor Emissions Impact
RT	Regional Transport
GB	General/Background
SO	Source Oriented
QA	Quality Assurance Collocation
Spatial Scale	
N	Neighborhood
U	Urban
R	Regional
MC	Microscale
MD	Middle Scale
Basic Monitoring Objective	
NC	NAAQS Comparison
RS	Research
TP	Timely/Public
N/A	Not Applicable

<b>Site Name</b>	<b>Stockton–Hazelton</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-077-1002
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Stockton-Lodi
<b>County</b>	San Joaquin
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	1/1/1976
<b>Pollutant Parameters</b>	Ozone, PM10 FRM, PM2.5 FEM, CO, NO <sub>2</sub> , Toxics
<b>Meteorological Parameters</b>	Outdoor temperature, Wind direction, Wind speed, Relative humidity
<b>Address</b>	1601 E. Hazelton St., Stockton CA 95205
<b>GPS Coordinates (decimal degrees)</b>	37.9507 N, -121.2689 W
<b>Distance to roadways</b>	62 m (north)
<b>Traffic Count/Year</b>	4000/2014 (Traffic ADT volume estimated by City of Stockton Public Works Traffic Engineering Division)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved



Stockton–Hazelton (1)				
Pollutant	Ozone	PM10 STP	PM2.5	PM2.5
Parameter code	44201	81102	88101	88101
Spatial scale	N	N	N	N
Site type	HC, PE	HC	HC, PE	GB, QA
Monitoring objective	NC, RS, TP	NC, RS	NC, RS, TP	TP
Monitor type	SLAMS	SLAMS	SLAMS	SPM
Network affiliation	None	None	None	None
FRM/FEM/ARM/Other	FEM	FRM	FEM	FEM
POC	1	2	3	4
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary	QA Collocation
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	Y	Y
Instrument manufacturer and model	API/Teledyne 400	Sierra Anderson 1200	Met One 1020	Met One 1020
Analysis method	UV	Gravimetric	Beta Attenuation	Beta Attenuation
Method code	087	063	170	170
Monitoring start date (MM/DD/YYYY)	01/01/76	01/01/85	05/11/10	08/23/10
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:6	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31
Probe/Inlet height above ground (meters)	5.7	6.5	5.7	5.7
Distance from supporting structure (meters)	2.0	1.7	2.0	2.0
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None
Distance from trees (meters)	None	None	None	None
Distance to furnace or incinerator flue (meters)	None	None	None	None
Distance between collocated monitors (meters)	N/A	N/A	N/A	1.2
Unrestricted airflow (degrees)	360	360	360	360
Probe material (Teflon, etc.)	Teflon	N/A	N/A	N/A
Residence time (seconds)	6.7	N/A	N/A	N/A

Pollutant	Ozone	PM10 STP	PM2.5	PM2.5
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	No	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	Monthly	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	Monthly	Monthly
Frequency of one-point QC check (gaseous)	5x/week	N/A	N/A	N/A
Last Annual Performance Evaluation (gaseous)	06/08/16	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	02/23/16, 08/02/16	02/23/16, 08/02/16	02/23/16, 08/02/16
Changes planned within the next 18 months (Y/N)	N	N	N	N

Stockton-Hazleton (2)					
Pollutant	NO <sub>2</sub>	CO	Toxics SN20021014	Toxics SN20021016	Meteorology
Parameter code	42602	42101	Many	Many	Many
Spatial scale	N	N	N	N	R
Site type	PE	PE	PE	PE, QA	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	RS, TP	RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	Many	Many	Many
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	CA Air Toxics	CA Air Toxics	None
FRM/FEM/ARM/Other	FRM	FRM	Other	Other	Other
POC	2	3	Many	Many	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	N/A	N/A	Primary	QA Collocated	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A

Pollutant	NO <sub>2</sub>	CO	Toxics SN20021014	Toxics SN20021016	Meteorology
Instrument manufacturer and model	API 200E	API 300 EU	Xontech 924	Xontech 924	RM Young
Analysis method	CL	IR	Many	Many	
Method code	099	093	Many	Many	Many
Monitoring start date (MM/DD/YYYY)	01/01/77	04/04/13	Varies by compound	Varies by compound	01/01/95
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31
Probe/Inlet height above ground (meters)	5.7	5.4	6.8	6.8	
Distance from supporting structure (meters)	2.0	None	2.0	2.0	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None
Distance from trees (meters)	None	None	None	None	None
Distance to furnace or incinerator flue (meters)	None	None	None	None	None
Distance between collocated monitors (meters)	None	None	2.8	2.8	None
Unrestricted airflow (degrees)	360	360	360	360	360
Probe material (Teflon, etc.)	Teflon	Teflon	Teflon	Teflon	Teflon
Residence time (seconds)	6.7	7.9	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	5x/week	5x/week	N/A	N/A	N/A

<b>Pollutant</b>	<b>NO<sub>2</sub></b>	<b>CO</b>	<b>Toxics SN20021014</b>	<b>Toxics SN20021016</b>	<b>Meteorology</b>
Last Annual Performance Evaluation (gaseous)	06/08/16	06/08/16	06/08/16	06/08/16	Sonic, not audited
Last two semi-annual flow rate audits for PM monitors	N/A	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N



<b>Site Name</b>	<b>Tracy - Airport</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-077-3005
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Stockton-Lodi
<b>County</b>	San Joaquin
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	1/11/2005
<b>Pollutant Parameters</b>	Ozone, PM10 FEM, PM2.5 Non-FEM, NO2
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure, radio acoustic sounding system (RASS)
<b>Address</b>	5749 S. Tracy Blvd., Tracy, CA 95376
<b>GPS Coordinates (decimal degrees)</b>	37.6826 N, -121.4423 W
<b>Distance to roadways (meters)</b>	700m (east)
<b>Traffic Count/Year</b>	4,063/2014 (Traffic count for nearest roads: Linne Rd, Corral Hollow Rd) Source: TJKM Transportation Consultants
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Dirt and Gravel

Tracy – Airport (1)					
Pollutant	Ozone	PM <sub>2.5</sub>	PM <sub>10</sub>	NO <sub>2</sub>	Meteorology
Parameter code	44201	88502	81102	42602	Many
Spatial scale	R	R	R	R	R
Site type	RT	RT	RT	RT	GB
Basic monitoring objective(s)	NC, RS, TP	TP	NC, RS, TP	NC, RS, TP	RS, TP
Monitor type	SLAMS	SPM	SLAMS	SLAMS	Other
FRM/FEM/ARM/Other	FEM	Non-FEM	FEM	FEM	Other
POC	1	3	3	1	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary	Other	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	MET One BAM 1020	Thermo TEOM 1400	Teledyne 200E	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	Beta-Attenuation	Tapered Element	CL	Many
Method code	087	731	079	099	Many
Monitoring start date (MM/DD/YYYY)	01/11/05	01/11/05	10/25/05	01/11/05	01/11/05
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	5.2m	5.2m	5.5m	5.5m	10m
Distance from supporting structure (meters)	1.4m	1.4m	1.7m	1.7m	N/A
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A	N/A	N/A

Pollutant	Ozone	PM2.5	PM10	NO <sub>2</sub>	Meteorology
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Borosilicate	N/A	N/A	Borosilicate	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	11.44	N/A	N/A	11.76	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Bi-Weekly	Monthly	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	No	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	11/17/16	N/A	N/A	11/17/16	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	05/16/16, 11/17/16	05/16/16, 11/17/16	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	Yes. Lower air profiler operating at site may cease operation due to changes to PAMS program requirements.

<b>Site Name</b>	<b>Manteca</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-077-2010
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Stockton-Lodi
<b>County</b>	San Joaquin
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	11/16/2010
<b>Pollutant Parameters</b>	PM2.5 FEM; PM10 FEM
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure
<b>Address</b>	530 Fishback Rd., Manteca, CA 95337
<b>GPS Coordinates (decimal degrees)</b>	37.7933 N, -121.2477 W
<b>Distance to roadways (meters)</b>	12 m (west)
<b>Traffic Count/Year</b>	13,383 / 2014 (Traffic count for nearest roads: Yosemite Ave and Airport Way) Source: TJKM Transportation Consultants
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved, vegetative



Manteca (1)			
Pollutant	PM <sub>2.5</sub>	PM <sub>10</sub>	Meteorology
Parameter code	88101	81102	Many
Spatial scale	N	N	N
Site type	PE	PE	PE
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None
FRM/FEM/ARM/Other	FEM	FEM	Other
POC	3	3	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Yes	N/A	N/A
Instrument manufacturer and model	MET One BAM 1020	Thermo TEOM 1400	ITP – Hy-Cal 512AA3B, OT – Met One 060A-2, BP – Met One 092, WD – Met One 020C, WS – Met One 010C
Analysis method	Beta Attenuation	Gravimetric	Many
Method code	170	079	Many
Monitoring start date (MM/DD/YYYY)	11/16/10	05/02/11	11/16/10
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	1/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	4.8m	5m	10m
Distance from supporting structure (meters)	1.73m	1.95m	0 m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A
Distance from trees (meters)	55m	55m	55.5m
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A

Pollutant	PM2.5	PM10	Meteorology
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	Biweekly	Biweekly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	No	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	05/16/16,11/14/16	05/16/16,11/14/16	N/A
Changes planned within the next 18 months (Y/N)	N	N	N

<b>Site Name</b>	<b>Modesto –14<sup>th</sup> St</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-099-0005
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Modesto
<b>County</b>	Stanislaus
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	1/1/81
<b>Pollutant Parameters</b>	Ozone, PM10 FEM, PM2.5 FRM, PM2.5 FEM, CO, PM2.5 Speciation (Supplemental)
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity
<b>Address</b>	814 14th Street, Modesto CA 95354
<b>GPS Coordinates (decimal degrees)</b>	37.6421 N, -120.9942 W
<b>Distance to road</b>	50 m (southwest)
<b>Traffic Count/Year</b>	124,000/2014 (Traffic count for nearest roads: H Street / Rte 99, Source: Caltrans 2014 AADDT)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved

Modesto –14 <sup>th</sup> St (1)			
Pollutant	Ozone	PM10 STP	PM2.5
Parameter code	44201	81102	88101
Spatial scale	N	N	N
Site type	HC, PE	PE	PE
Monitoring objective	NC, RS, TP	NC, RS, TP	NC, RS, TP
Monitor type	SLAMS	SLAMS	SLAMS
Network affiliation	None	None	None
FRM/FEM/ARM/Other	FEM	FEM	FEM
POC	1	7	3
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	N/A	Primary	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	Y
Instrument manufacturer and model	API/Teledyne 400	Met One 4 Models Beta A	Met One 1020
Analysis method	UV	Beta Attenuation	Beta Attenuation
Method code	087	122	170
Monitoring start date (MM/DD/YYYY)	1/1/1981	12/1/2013	5/1/2010
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31
Probe/Inlet height above ground (meters)	7.9	4.4	5.1
Distance from supporting structure (meters)	4.8	1.1	1.8
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from trees (meters)	None	None	None
Distance to furnace or incinerator flue (meters)	None	None	None
Distance between collocated monitors (meters)	None	None	2.0
Unrestricted airflow (degrees)	360	360	360
Probe material (Teflon, etc.)	Teflon	N/A	N/A
Residence time (seconds)	14.5	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the loval? If yes, please list distance (meters) and instrument(s).	N/A	No	No

Pollutant	Ozone	PM10 STP	PM2.5
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	Monthly	Monthly
Frequency of one-point QC check (gaseous)	5x/week	N/A	N/A
Last Annual Performance Evaluation (gaseous)	04/14/2016	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	05/02/2016, 11/30/2016	05/02/2016, 11/30/2016
Changes planned within the next 18 months (Y/N)	N	N	N

Modesto-14 <sup>th</sup> St (2)				
Pollutant	PM2.5	PM2.5 Speciation	CO	Meteorology
Parameter code	88101	Many	42101	Many
Spatial scale	N	N	N	R
Site type	PE, QA	PE	PE	GB
Monitoring objective(s)	NC, RS	RS	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS
Network affiliation	None	CSN (Supplemental)	None	None
FRM/FEM/ARM/Other	FRM	Other	FRM	Other
POC	1	5	3	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	QA Collocation	Primary	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Y	N/A	N/A	N/A
Instrument manufacturer and model	Thermo 2000i	Met-One SASS	API 300 EU	N/A
Analysis method	Gravimetric	Many	IR	N/A
Method code	143	810	067	Many
Monitoring start date (MM/DD/YYYY)	01/03/95	01/14/02	01/01/13	01/01/95
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:12	1:6	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31
Probe/Inlet height above ground(meters)	6.1	5.6	7.7	N/A



Pollutant	PM2.5	PM2.5 Speciation	CO	Meteorology
Distance from supporting structure (meters)	2.8	N/A	0.6	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	4.5	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	1 m (Met tower)	None	None
Distance from trees (meters)	None	40	None	None
Distance to furnace or incinerator flue (meters)	None	Approx. 40 m	None	None
Distance between collocated monitors (meters)	2.0	2.4 m (URG 3000n) 4.5 m (Partisol) 3.0 m (BAM-10)	None	None
Unrestricted airflow (degrees)	360	Est. 350	360	360
Probe material (Teflon, etc.)	N/A	N/A	Teflon	N/A
Residence time (seconds)	N/A	N/A	9.7	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	No	No	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	Monthly	Monthly	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	N/A	N/A	5x/week	N/A
Last Annual Performance Evaluation (gaseous)	N/A	N/A	04/04/16	N/A
Last two semi-annual flow rate audits for PM monitors	05/02/16, 11/30/16	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N

Site Name	Turlock	
AQS ID (XX-XXX-XXXX)	06-099-0006	
Representative statistical area Name (i.e. MSA, CBSA, other)	Modesto	
County	Stanislaus	
Collecting (Operating) Agency	SJVAPCD	
Analytical Lab (i.e. weigh lab, toxics lab, other)	CARB	
Reporting Agency	SJVAPD: Ozone, PM2.5 FEM, NO2, Meteorology	CARB: PM10 FRM
Site Start Date	4/1/1992	
Pollutant Parameters	Ozone, PM10 FRM, PM2.5 FEM, NO2	
Meteorological Parameters	Wind speed, wind direction, outdoor temperature, barometric pressure	
Address	900 S. Minaret St., Turlock, CA 95380	
GPS Coordinates (decimal degrees)	37.4880 N, -120.8360 W	
Distance to roadways (meters)	40m (northeast)	
Traffic Count/Year	7,186/2015 (Minaret Street/Golden State Blvd., Source: City of Turlock Engineering Division)	
Groundcover (e.g. paved, vegetative, dirt, sand, gravel)	Gravel	

Turlock (1)					
Pollutant	Ozone	PM <sub>2.5</sub>	PM <sub>10</sub>	NO <sub>2</sub>	Meteorology
Parameter code	44201	88101	81102	42602	Many
Spatial scale	N	N	N	N	R
Site type	HC, PE	HC, PE	PE	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	NC, RS	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None	None
FRM/FEM/ARM/Other	FEM	FEM	FRM	FEM	Other
POC	1	3	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary	N/A	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	Y	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	MET One BAM 1020	ECOTECH Hi-Vol 3000	Teledyne 200E	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	Beta Attenuation	Gravimetric	Chem.	Many
Method code	087	170	162	099	Many
Monitoring start date (MM/DD/YYYY)	04/01/00	09/14/06	09/14/06	04/01/00	WS, WD - 4/1/2000; OT, BP 09/03/08
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	1:6	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31
Probe height (meters)	5.5m	5.6m	5.5m	5.5m	8.3m
Distance from supporting structure (meters)	2m	2m	2m	2m	N/A

Pollutant	Ozone	PM2.5	PM10	NO <sub>2</sub>	Meteorology
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A
Distance from trees (meters)	37.5m	37.5m	37.5m	37.5m	37.5m
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Borosilicate	N/A	N/A	Borosilicate	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	12.67	N/A	N/A	14.28	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	Monthly	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Bi-weekly	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A	N/A	N/A

Pollutant	Ozone	PM2.5	PM10	NO <sub>2</sub>	Meteorology
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	No	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	11/28/2016	N/A	N/A	11/28/2016	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	05/16/2016 11/28/2016	05/16/2016 11/28/2016	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N



<b>Site Name</b>	<b>Merced - M St</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-047-2510
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Merced
<b>County</b>	Merced
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB: PM10 FRM and PM2.5 FRM
<b>Site Start Date</b>	4/1/1999
<b>Pollutant Parameters</b>	PM10 FRM, PM2.5 FRM
<b>Meteorological Parameters</b>	None
<b>Address</b>	2334 M Street, Merced, CA 95340
<b>GPS Coordinates (decimal degrees)</b>	37.3086 N, -120.4800 W
<b>Distance to roadways (meters)</b>	55 m (northwest)
<b>Traffic Count/Year</b>	51,000/2014 (Traffic count for nearest roads: R Street/Rte 99, Source: Caltrans 2014 AADT)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved, gravel

Merced – M St (1)		
Pollutant	PM2.5	PM10
Parameter code	88101	81102
Spatial scale	N	N
Site type	HC, PE	HC, PE
Basic monitoring objective(s)	NC, RS	NC, RS
Monitor type	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None
FRM/FEM/ARM/Other	FRM	FRM
POC	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Y	N/A
Instrument manufacturer and model	Thermo-Partisol 2025i	ECOTECH Hi-Vol 3000
Analysis method	Gravimetric	Gravimetric
Method code	145	162
Monitoring start date (MM/DD/YYYY)	04/01/99	4/01/99
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:3	1:6
Sampling season (MM/DD - MM/DD)	1/1 -12/31	1/1 – 12/31
Probe height (meters)	8.4m	8.4m
Distance from supporting structure (meters)	2.05m	1.7m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None
Distance from trees (meters)	50 m east	50 m east
Distance to furnace or incinerator flue (meters)	42m	38m

Pollutant	PM2.5	PM10
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	Bi-weekly	Monthly
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	05/02/16, 11/29/16	05/02/16, 11/29/16
Changes planned within the next 18 months (Y/N)	N	N

<b>Site Name</b>	<b>Merced - Coffee</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-047-0003
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Merced
<b>County</b>	Merced
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	10/1/1991
<b>Pollutant Parameters</b>	Ozone, PM2.5 FEM, PM10 FEM, NO2
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature
<b>Address</b>	385 S. Coffee St., Merced, CA 95340
<b>GPS Coordinates (decimal degrees)</b>	37.2816 N, -120.4340 W
<b>Distance to roadways (meters)</b>	15 m (east)
<b>Traffic Count/Year</b>	42,500/2014 (Traffic count for nearest roads: Childs Avenue/Rte 99, Source: Caltrans 2014 AADT)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Vegetative, dirt and gravel

Merced – Coffee (1)				
Pollutant	Ozone	PM2.5	NO <sub>2</sub>	Meteorology
Parameter code	44201	88101	42602	Many
Spatial scale	N	N	N	R
Site type	HC, PE	PE	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None
FRM/FEM/ARM/Other	FEM	FEM	FEM	Other
POC	1	3	1	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	N/A	Primary	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	Y	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	MET One BAM 1020	Teledyne T200E	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	Beta Attenuation	CL	Many
Method code	087	170	099	Many
Monitoring start date (MM/DD/YYYY)	10/01/91	10/19/09	10/01/91	10/01/91
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	5.4m	5.4m	5.4m	7.6m
Distance from supporting structure (meters)	1.9m	1.9m	1.9m	4.1m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	13.5m	14.0m	13.5m	13.5m



Pollutant	Ozone	PM2.5	NO <sub>2</sub>	Meteorology
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Borosilicate	N/A	Borosilicate	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	9.84	N/A	10.22	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Bi-weekly	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	11/29/16	N/A	11/29/16	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	05/16/16, 11/29/16	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N

<b>Site Name</b>	<b>Madera - City</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-039-2010
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Madera
<b>County</b>	Madera
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB: PM2.5 FRM
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	6/1/2010
<b>Pollutant Parameters</b>	Ozone, PM10 FEM, PM2.5 FEM, PM2.5 FRM
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity, barometric pressure, solar radiation.
<b>Address</b>	28261 Avenue 14, Madera, CA 93638
<b>GPS Coordinates (decimal degrees)</b>	36.9532 N, -120.0342 W
<b>Distance to roadways (meters)</b>	70 m (south)
<b>Traffic Count/Year</b>	751/2015 (Traffic count for nearest roads: Avenue 14 west of Road 29, westbound trips per hour in 24 hours. Source: Madera County Transportation Commission 2015 Traffic Volumes Report.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved, dirt, and vegetative

Madera – City (1)					
Pollutant	Ozone	PM2.5	PM2.5	PM10	Meteorology
Parameter code	44201	88101	88101	81102	Many
Spatial scale	N	N	N	N	N
Site type	HC, GB	PE, HC, QA	PE, HC	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	NC, RS, TP	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None	None
FRM/FEM/ARM/Other	FEM	FRM	FEM	FEM	Other
POC	1	1	3	3	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary	QA Collocated	Primary	Primary	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	Y	Y	N/A	N/A
Instrument manufacturer and model	TAPI 400E	Thermo Partisol 2025i	MET One BAM 1020	Thermo TEOM 1400	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	Gravimetric	Beta Attenuation	Tapered Element	Many
Method code	087	145	170	079	Many
Monitoring start date (MM/DD/YYYY)	06/01/10	02/17/14	06/01/10	06/01/10	06/01/10
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:12	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	5.1m	5.1m	4.7 m	4.6m	10m
Distance from supporting structure (meters)	2 m	2.1 m	1.7m	1.6m	7 m
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A
Distance from trees (meters)	14.5 m	16.5 m	16.5 m	13 m	14.5 m

Pollutant	Ozone	PM2.5	PM2.5	PM10	Meteorology
Distance to furnace or incinerator flue (meters)	53m	53m	52m	54m	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Teflon	N/A	N/A	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; NPAMS: VOCs, Carbonyls (seconds)	5.2	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	Monthly	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	Bi-Weekly	Bi-Weekly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the inlet? If yes, please list distance (meters) and instrument(s).	N/A	No	No	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the inlet? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	5/23/16	N/A	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	5/23/16, 12/14/16	5/23/16, 12/14/16	5/23/16, 12/14/16	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N

<b>Site Name</b>	<b>Madera – Pump Yard</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-039-0004
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Madera
<b>County</b>	Madera
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	SJVAPCD contracts out so lab varies from year to year.
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	07/01/1997
<b>Pollutant Parameters</b>	Ozone, NO2, Speciated VOC, NMH
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity, barometric pressure, solar radiation
<b>Address</b>	Avenue 8 and Road 29 ½, Madera, CA 93637
<b>GPS Coordinates (decimal degrees)</b>	36.867125 N, -120.010158 W
<b>Distance to roadways (meters)</b>	20 m (west)
<b>Traffic Count/Year</b>	2,040/2015 (Traffic count for nearest roads: Avenue 7 west of Rte 99, westbound trips per hour in 24 hours. Source: Madera County Transportation Commission 2015 Traffic Volumes Report.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Dirt, paved



Madera – Pump Yard (1)					
Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Parameter code	44201	42602	43102	Many	Many
Spatial scale	N	N	N	N	R
Site type	HC, GB	PE	PE	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	RS	RS	RS, TP
Monitor type	SLAMS	SLAMS	Other	Other	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	PAMS	PAMS	PAMS	PAMS	PAMS
FRM/FEM/ARM/Other	FEM	FEM	Other	Other	Other
POC	1	1	1	1	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	N/A	N/A	N/A	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	Thermo 42i	Xontech 910A	Synspec Alpha 115	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, RH- Vaisala HMP45D, SRD- Epply Mod. 8-48, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	CL	GC	GC	Many
Method code	087	074	164	011	Many
Monitoring start date (MM/DD/YYYY)	07/01/97	07/01/97	07/01/97	07/01/97	07/01/97
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	1:3	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	06/01 – 8/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	5.5m	5.5m	5.5m	5.5m	10m
Distance from supporting structure (meters)	2m	2m	2m	2m	8.2m

Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	Horiz. 20 m Vert 0 m above	Horiz. 20 m Vert 0 m above	Horiz. 20 m Vert 0 m above	Horiz. 20 m Vert 0 m above	Horiz. 20 m Vert 0 m above
Distance from trees (meters)	40.5 m	40.5 m	40.5 m	40.5 m	40.5 m
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex	Pyrex	Stainless steel	Stainless steel	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	10.46	10.48	11.41	11.41	N/A
Frequency of one-point QC check for gaseous instruments	Daily	Daily	Daily	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the level? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A

Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	11/15/16	11/15/16	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N

Site Name	Tranquillity
AQS ID (XX-XXX-XXXX)	06-019-2009
Representative statistical area Name (i.e. MSA, CBSA, other)	Fresno
County	Fresno
Collecting (Operating) Agency	SJVAPCD
Analytical Lab (i.e. weigh lab, toxics lab, other)	N/A
Reporting Agency	SJVAPCD
Site Start Date	11/9/2009
Pollutant Parameters	Ozone, PM2.5 FEM
Meteorological Parameters	Wind speed, wind direction, outdoor temperature, barometric pressure
Address	32650 W. Adams, Tranquillity, CA 93668
GPS Coordinates (decimal degrees)	36.6008 N, -120.3822 W
Distance to roadways (meters)	200m (south)
Traffic Count/Year	680/2013 (Raw traffic count for nearest roads: Northbound Derrick Avenue north of Kamm Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013)
Groundcover (e.g. paved, vegetative, dirt, sand, gravel)	Dirt, vegetative

Tranquillity (1)			
Pollutant	Ozone	PM2.5	Meteorology
Parameter code	44201	88101	Many
Spatial scale	U	U	U
Site type	PE	PE	PE
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	TP
Monitor type	SLAMS	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None
FRM/FEM/ARM/Other	FEM	FEM	Other
POC	1	3	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	Y	N/A
Instrument manufacturer and model	Teledyne 400E (IZS)	MET One BAM 1020	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	Beta attenuation	Many
Method code	087	170	Many
Monitoring start date (MM/DD/YYYY)	09/01/09	09/01/09	09/01/09
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	1/1 – 12/31	1/1 – 12/31	1/1 – 12/31
Probe height (meters)	4.6 m	4.4 m	10.6m
Distance from supporting structure (meters)	1.8 m	1.7 m	0 m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	82.8 m	76.8 m	76.7m
Distance from trees (meters)	63.7 m	66.1 m	63.7m
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A



Pollutant	Ozone	PM2.5	Meteorology
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	359	359	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Teflon, glass	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	3.6 s	N/A	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Bi-Weekly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	5/24/16	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	5/24/16, 12/12/16	N/A
Changes planned within the next 18 months (Y/N)	N	N	N

<b>Site Name</b>	<b>Fresno – Sky Park</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-019-0242
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Fresno
<b>County</b>	Fresno
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	7/1/1986
<b>Pollutant Parameters</b>	Ozone, NO2
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature
<b>Address</b>	4508 Chenault Ave., Fresno, CA 93722
<b>GPS Coordinates (decimal degrees)</b>	36.8405 N, -119.8740 W
<b>Distance to roadways (meters)</b>	12m (west)
<b>Traffic Count/Year</b>	750/2012 (Raw traffic count in a 24-hour period for nearest roads: Spruce Avenue east of Milburn Avenue. Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Gravel, dirt

Fresno – Sky Park (1)			
Pollutant	Ozone	NO <sub>2</sub>	Meteorology
Parameter code	44201	42602	Many
Spatial scale	N	N	N
Site type	HC, PE, RT	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	N/A	N/A	N/A
FRM/FEM/ARM/Other	FEM	FEM	Other
POC	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	Thermo 42i	ITP- BA-512-A-A-3-B, OT- Met One 060A-2, WD- Met One 020C, WS- Met One 010C
Analysis method	UV	CL	Many
Method code	087	574	Many
Monitoring start date (MM/DD/YYYY)	07/01/86	07/01/86	07/01/86
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	8.54 m	8.54 m	5.6 m
Distance from supporting structure (meters)	3.5 m	3.5 m	2.26 m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A
Distance from trees (meters)	4.09 m	4.09 m	1.2 m

Pollutant	Ozone	NO <sub>2</sub>	Meteorology
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	280	280	280
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex/Teflon	Pyrex/Teflon	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	11.24	11.40	N/A
Frequency of one-point QC check for gaseous instruments	Daily	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	3/16/16	3/16/16	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N

Site name	Clovis – Villa		
AQS ID (XX-XXX-XXXX)	06-019-5001		
Representative statistical area Name (i.e. MSA, CBSA, other)	Fresno		
County	Fresno		
Collecting (Operating) Agency	SJVAPCD		
Analytical Lab (i.e. weigh lab, toxics lab, other)	SJVAPCD contracts out so Analytical lab varies from year to year: Speciated VOC	CARB: PM10 FRM, PM2.5 FRM	
Reporting Agency	SJVAPCD: PM2.5 FRM, PM2.5 FEM, PM10 FRM, PM10 FEM, CO, NO <sub>2</sub> , NMH, Speciated VOC, Meteorology	CARB: PM10 FRM, PM2.5 FRM	SJVAPCD contracts out so Reporting lab varies from year to year: Speciated VOC
Site Start Date	9/1/1990		
Pollutant Parameters	Ozone, PM10 FRM, PM2.5 FEM, PM2.5 FRM, CO, NO <sub>2</sub> , NMH, Speciated VOC		
Meteorological Parameters	Wind speed, wind direction, outdoor temperature, relative humidity, barometric pressure, solar radiation		
Address	908 N. Villa Ave., Clovis CA 93612		
GPS Coordinates (decimal degrees)	36.8194 N, -119.7160 W		
Distance to roadways (meters)	260 m (east)		
Traffic Count/Year	13,890/2008 (Raw traffic count in a 24-hour period: Eastbound Bullard Avenue/Villa Avenue intersection) Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013 (new counts unavailable)		
Groundcover (e.g. paved, vegetative, dirt, sand, gravel)	Paved		



Clovis – Villa (1)							
Pollutant	Ozone	PM10	PM2.5	PM10 LC	PM10 STP	PM2.5	PM2.5
Parameter Code	44201	81102	88101	85101	81102	88101	88101
Spatial scale	N	N	N	N	N	N	N
Site type	Max PEI, HC	PE	HC	HC	HC	HC	HC
Basic monitoring objective(s)	NC, RS, TP	NC, RS	NC, RS, TP	RS, TP	NC, RS, TP	NC, TP	NC, RS
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	PAMS	None	None	None	None	None	None
FRM/FEM/ARM/Other	FEM	FRM	FEM	FEM	FEM	FEM	FRM
POC	1	1	3	3	3	3	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	QA Collocated	Primary	Primary	QA Collocated	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	Y	N/A	N/A	Y	Y
Instrument manufacturer and model	Teledyne 400 E	Sierra Andersen SSI	Teledyne 602	Teledyne 602	Teledyne 602	Met One BAM 1020	Thermo Partisol 2025i
Analysis method	UV	Gravimetric	Beta Attenuation	Beta Attenuation	Beta Attenuation	Beta Attenuation	Gravimetric
Method code	087	162	205	204	204	170	145
Monitoring start date (MM/DD/YYYY)	01/01/90	01/01/90	01/01/17	01/01/17	01/01/17	11/25/08	09/06/12
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:6	Hourly	Hourly	Hourly	Hourly	1:3
Sampling season (MM/DD - MM/DD)	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31	01/01 - 12/31
Probe height (meters)	5.66 m	5.5 m	5.99 m	6.35 m	6.35 m	6.0 m	6.0 m
Distance from supporting structure (meters)	1.85 m	2 m	1.85 m	2.21 m	2.21 m	2 m	2m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Pollutant	Ozone	PM10	PM10	PM2.5	PM2.5	PM2.5	PM2.5
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Distance from trees (meters)	15 m	15 m	17.5 m	17.5 m	17.5 m	37.5 m	37.5 m
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	2.1 m	2.1 m	2.1 m	2.5	2.5
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	355	360	360	360	355	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex	N/A	N/A	N/A	N/A	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	4.4	N/A	N/A	N/A	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the inlet? If yes, please list distance (meters) and instrument(s).	N/A	No	No	No	No	No	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the inlet? If yes, please list distance (meters) and instrument(s).	N/A	No	No	No	No	No	No
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	Monthly	N/A	N/A	N/A	N/A	Monthly
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	Bi-weekly	Bi-weekly	Bi-weekly	Bi-weekly	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A	N/A	N/A	N/A	N/A

Pollutant	Ozone	PM10	PM10	PM2.5	PM2.5	PM2.5	PM2.5
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	3/17/16	N/A	N/A	N/A	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	03/17/2016 09/20/2016	N/A	N/A	N/A	03/17/2016 09/20/2016	03/17/2016 09/20/2016
Changes planned within the next 18 months (Y/N)	N	N	New analyzer 1/1/17	New analyzer 1/1/17	New analyzer 1/1/17	Removed 12/31/16	N

Clovis – Villa (2)					
Pollutant	CO	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Parameter code	42101	42602	Many	43102	Many
Spatial scale	N	N	N	N	R
Site type	Max PEI, PE	HC	PE	HC	Other
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	RS	RS	RS, TP
Monitor type	SLAMS	SLAMS	Other	Other	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	PAMS	PAMS	PAMS	PAMS	PAMS
FRM/FEM/ARM/Other	FEM	FEM	Other	Other	Other
POC	1	1	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	N/A	N/A	N/A	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model	Thermo 48i	Thermo 42i	Xontech 910A / Xontech 925	Synpec Alpha 115	ITP- HY-CAL BA 512-A-A-3-B, OT- Met-One 060A-2, BP- Met-One 092, RH- VAISALA HMP45D, SRD- EPPLY Mod.8-48, WD- Met-One 020C, WS- Met One 010C, BP- Met One 092

Pollutant	CO	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Analysis method	IR	Chem.	GC / UV Absorption	Flame Ionization	Many
Method code	554	099	177 / 202	011	Many
Monitoring start date (MM/DD/YYYY)	01/01/90	01/01/90	01/01/90	01/01/90	01/01/90
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	1:3	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	06/01 – 08/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	5.66 m	5.66 m	5.66 m	5.66 m	10 m
Distance from supporting structure (meters)	1.85 m	1.85 m	1.85 m	1.85 m	7.5 m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	29.5 m
Distance from trees (meters)	15 m	15 m	15 m	15 m	25.5 m
Distance to furnace or incinerator flue (meters)	16.0 m	16.0 m	13.5 m	16.0 m	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex	Pyrex	Stainless steel	Pyrex	N/A

Pollutant	CO	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	5.04	5.23	5.0	3.23	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	Daily	Daily	N/A	Daily	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	03/17/16	03/17/16	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N



<b>Site Name</b>	<b>Fresno – Garland</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-019-0011
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Fresno
<b>County</b>	Fresno
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	12/31/2011
<b>Pollutant Parameters</b>	Ozone, PM10 STP FEM, PM2.5 FEM, PM2.5 FRM, PM2.5 Speciation (STN), CO, NO <sub>2</sub> , NO <sub>y</sub> , SO <sub>2</sub> , Lead, Toxics <b>PM<sub>10-2.5</sub>:</b> (2) PM10 FEMs + (2) PM2.5 FEMs = (2) PM <sub>10-2.5</sub> FEMs. There are 2 pairs of analyzers - 1 pair is collocated. The (4) analyzers render (6) datasets. Each dataset has (3) method codes.
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure, relative humidity
<b>Address</b>	3727 N. First St., Ste.104, Fresno CA 93726
<b>GPS Coordinates (decimal degrees)</b>	36.7853 N, -119.7732 W
<b>Distance to roadways (meters)</b>	30 m (south)
<b>Traffic Count/Year</b>	7,460/2011 (Raw traffic count in a 24-hour period: First Street near Dakota Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Gravel covered tar paper with wooden deck walkways

Fresno–Garland (1)						
Pollutant	Ozone	CO	NO <sub>2</sub>	SO <sub>2</sub>	NOy	Toxics
Parameter code	44201	42101	42602	42401	42600	Many
Spatial scale	U	U	U	U	U	N
Site type	PE	PE	Max PEI	PE	PE	PE
Basic monitoring objective(s)	NC, RS	NC, RS	NC, RS	NC, RS	NC, RS	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Network affiliation	NCore	NCore	NCore	NCore	NCore	NCore
FRM/FEM/ARM/Other	FEM	FRM	FRM	FEM	Other	Other
POC	1	3	1	1	3	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary	Primary	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model	API/Teledyne 400	API 300 EU	API 200E	Thermo 43	Instrumental	Xontech 924
Analysis method	UV	UV	UV	UV	Chemiluminescence Teledyne API 200EU/501	Many
Method code	087	093	099	009	699	Many
Monitoring start date (MM/DD/YYYY)	12/23/2011	1/18/2012	2/1/2012	1/18/2012	1/18/2012	12/23/2011
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe/Inlet height above ground (meters)	7.0	7.0	7.0	7.0	6.2	5.8
Distance from supporting structure (meters)	None	None	None	None	N/A	None

Pollutant	Ozone	CO	NO <sub>2</sub>	SO <sub>2</sub>	NO <sub>y</sub>	Toxics
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None	None
Distance from trees (meters)	None	None	None	None	None	None
Distance to furnace or incinerator flue (meters)	None	None	None	None	None	None
Distance between collocated monitors (meters)	N/A	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees)	360	360	360	360	360	360
Probe material (Teflon, etc.)	Teflon	Teflon	Teflon	Teflon	Teflon	Teflon
Residence time (seconds)	2.5	16.8	2.6	5.9	< 20 seconds	
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	N/A	N/A	N/A	N/A

<b>Pollutant</b>	<b>Ozone</b>	<b>CO</b>	<b>NO<sub>2</sub></b>	<b>SO<sub>2</sub></b>	<b>NO<sub>y</sub></b>	<b>Toxics</b>
Frequency of one-point QC check (gaseous)	Nightly	Nightly	Nightly	Nightly	Nightly	N/A
Last Annual Performance Evaluation (gaseous)	04/13/2016	04/13/2016	04/13/2016	04/13/2016	04/13/2016	04/13/2016
Last two semi-annual flow rate audits for PM monitors	N/A	N/A	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	Y	N

Fresno–Garland (2)					
Pollutant	PM2.5	PM2.5	PM10 STP	PM2.5	PM10-2.5
Parameter code	88101	88101	81102	88101	86101
Spatial scale	N	N	N	N	N
Site type	HC	HC, PE, QA	PE	HC, QA	PE, QA
Basic monitoring objective(s)	NC, RS	NC, RS	NC, RS	NC, RS	NC, RS
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Network affiliation	NCore	NCore	NCore	NCore	NCore
FRM/FEM/ARM/Other	FRM	FRM	FEM	FEM	FEM
POC	1	2	3	3	3
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	QA Collocated	Primary	QA Collocated	QA Collocated, serving as Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Y	Y	N/A	Y	N/A
Instrument manufacturer and model	R&P 2025	R&P 2025	Met One BAM 1020 (QTY 2)	MetOne BAM 1020 (QTY 2)	Met One BAM 1020
Analysis method	Sequential	Sequential	Beta Attenuation	Beta Attenuation	Beta Attenuation
Method code	118	118	122	170	185
Monitoring start date (MM/DD/YYYY)	1/1/2012	1/25/2012	1/1/2012	1/1/2012	10/14/2013
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:1	1:6	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe/Inlet height above ground (meters)	5.9	5.9	6.2	6.4	6.3
Distance from supporting structure (meters)	None	None	N/A	None	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None
Distance from trees (meters)	None	None	None	None	None
Distance to furnace or incinerator flue (meters)	None	None	None	None	None

Pollutant	PM2.5	PM2.5	PM10 STP	PM2.5	PM <sub>10-2.5</sub>
Distance between collocated monitors (meters)	2.0	2.0	1.0	N/A	N/A
Unrestricted airflow (degrees)	360	360	360	360	360
Probe material (Teflon, etc.)	N/A	N/A	Aluminum	N/A	N/A
Residence time (seconds)	N/A	N/A	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	No	No	No	No	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	Monthly	Monthly	Bi-weekly	Bi-weekly	Bi-weekly
Frequency of flow rate verification for automated PM analyzers audit	Monthly	Monthly	BI-weekly	BI-weekly	Bi-weekly
Frequency of one-point QC check (gaseous)	N/A	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation (gaseous)	N/A	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	03/15/2016, 09/20/2016	03/15/2016, 09/20/2016	03/15/2016, 09/20/2016	03/15/2016, 09/20/2016	03/15/2016, 09/20/2016
Changes planned within the next 18 months (Y/N)	N	N	N	N	N

Fresno–Garland (3)					
Pollutant	Lead TSP (LC)	Lead TSP (STP)	PM2.5 Speciation	PM2.5 Speciation	Meteorology
Parameter code	14129	12128	Many	Many	Many
Spatial scale	N	N	N, U	N, U	U
Site type	PE	PE	PE	PE	GB
Monitor objective	NC, RS, TP	NC	RS	RS	RS, TP
Monitor type	SLAMS	SLAMS	Other	Other	SLAMS
Network affiliation	NCore	NCore	NCore, STN	NCore, STN	NCore
FRM/FEM/ARM/Other	FEM	Other	Other	Other	Other
POC	1	7	5	5	Many



Pollutant	Lead TSP (LC)	Lead TSP (STP)	PM2.5 Speciation	PM2.5 Speciation	Meteorology
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model)	Hi-Vol	Lo-Vol Xontech 924, Teflon	Met-One SASS	URG 3000-N	Many
Method code	193	305	810	839	Many
Analysis method	ICP-MS	ICP/Mass Spectrometer	Many	Many	Many
Monitoring start date (MM/DD/YYYY)	2/1/2012	1/1/2012	1/1/2012	1/1/2012	12/23/2011
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:6	1:6	1:3	1:3	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	1.35	5.9	5.5	5.5	10
Distance from supporting structure (meters)	1.2	2.1	2	2	8
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	10	10	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	11	9	None
Distance from trees (meters)	None	None	11	9	None
Distance to furnace or incinerator flue (meters)	2.4	2.4	9	9	None
Distance between collocated monitors (meters)	N/A	N/A	2.5	2.5	N/A
Unrestricted airflow (degrees)	360	360	360	360	360
Probe material (Teflon, etc.)	N/A	Teflon	N/A	N/A	Teflon
Residence time (seconds)	N/A	N/A	N/A	N/A	N/A

Pollutant	Lead TSP (LC)	Lead TSP (STP)	PM2.5 Speciation	PM2.5 Speciation	Meteorology
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	No	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	No	No	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	Monthly	Monthly	Bi-weekly	Bi-weekly	N/A
Frequency of flow rate verification for automated PM analyzers audit	Monthly	Monthly	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	N/A	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation (gaseous)	N/A	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	03/15/2016, 09/20/2016	03/15/2016, 09/20/2016	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	Y	N	N	N

<b>Site Name</b>	<b>Fresno - Pacific</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-019-5025
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Fresno
<b>County</b>	Fresno
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	1/1/00
<b>Pollutant Parameters</b>	PM2.5 FRM
<b>Meteorological Parameters</b>	None
<b>Address</b>	1716 Winery, Fresno, CA 93727
<b>GPS Coordinates (decimal degrees)</b>	36.7263N, -119.7330W
<b>Distance to roadways (meters)</b>	40 m (east)
<b>Traffic Count/Year</b>	5,350/2011 (Raw traffic count in a 24-hour period: Butler Avenue east of Chestnut Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Rubber roof coating

Fresno – Pacific (1)	
<b>Pollutant</b>	<b>PM2.5</b>
Parameter code	88101
Spatial scale	N
Site type	PE
Basic monitoring objective(s)	NC, RS
Monitor type	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None
FRM/FEM/ARM/Other	FRM
POC	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Y
Instrument manufacturer and model	Partisol 2025I
Analysis method	Gravimetric
Method code	145
Monitoring start date (MM/DD/YYYY)	01/01/00
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:3
Sampling season (MM/DD - MM/DD)	01/01 – 12/31
Probe height (meters)	11.3m
Distance from supporting structure (meters)	2.1m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	53.4m NE 5.1 above vertical
Distance from trees (meters)	77m
Distance to furnace or incinerator flue (meters)	None
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A

Pollutant	PM2.5
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Aluminum
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	Biweekly
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A
Frequency of one-point QC check for gaseous instruments	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	02/25/16, 09/20/16
Changes planned within the next 18 months (Y/N)	N

Site Name	Fresno - Drummond	
AQS ID (XX-XXX-XXXX)	06-019-0007	
Representative statistical area Name (i.e. MSA, CBSA, other)	Fresno	
County	Fresno	
Collecting (Operating) Agency	SJVAPCD	
Analytical Lab (i.e. weigh lab, toxics lab, other)	CARB	
Reporting Agency	SJVAPCD: Ozone, CO, NO2, PM2.5	CARB: PM10 FRM
Site Start Date	7/1/84	
Pollutant Parameters	Ozone, PM10 FRM, NO2	
Meteorological Parameters	Wind speed, wind direction, outdoor temperature, barometric pressure	
Address	4706 E. Drummond Street, Fresno, CA 93725	
GPS Coordinates (decimal degrees)	36.7055 N, -119.7410 W	
Distance to roadways (meters)	50m	
Traffic Count/Year	7,110/2010 (Raw traffic count in a 24-hour period for nearest roads: Jensen Avenue east of Chestnut Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.	
Groundcover (e.g. paved, vegetative, dirt, sand, gravel)	Paved	



Fresno – Drummond (1)					
Pollutant	Ozone	PM10	PM10	NO <sub>2</sub>	Meteorology
Parameter code	44201	81102	81102	42602	Many
Spatial scale	N	N	N	N	R
Site type	PE, HC, RT	PE	PE, QA	HC	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS	NC, RS	NC	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None	None
FRM/FEM/ARM/Other	FEM	FRM	FRM	FEM	Other
POC	1	1	2	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary	Primary	QA Collocated	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne API 400E	ECOTECH Hi-Vol 3000	ECOTECH Hi-Vol 3000	Thermo 42i	ITP- HY-CAL BAAA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS- Met One 010C
Analysis method	UV	Gravimetric	Gravimetric	CL	Many
Method code	087	162	162	574	Many
Monitoring start date (MM/DD/YYYY)	07/01/84	07/01/84	7/01/084	07/01/84	07/01/84
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:6	1:6	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 - 12/31	01/01 – 12/31
Probe height (meters)	8.1m	5.9m	5.9m	8.1m	9.9m
Distance from supporting structure (meters)	2.8m	1.7m	1.7m	2.8m	N/A
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None
Distance from trees (meters)	22.5 m	22.5m	25.5m	22.5m	25.0m

Pollutant	Ozone	PM10	PM10	NO <sub>2</sub>	Meteorology
Distance to furnace or incinerator flue (meters)	None	None	None	None	None
Distance between monitors fulfilling a QA collocation requirement (meters).	None	3.9m	3.9m	None	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex	N/A	N/A	Pyrex	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	8.73	N/A	N/A	10.65	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	Monthly	Monthly	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	None	None	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	None	None	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	No	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	02/25/16	N/A	N/A	02/25/16	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	02/25/16, 9/20/16	02/25/16, 9/20/16	N/A	N/A
Changes planned within the next 18 months (Y/N)	Yes – changing 400E to T265.	N	N	Yes – changing 42i to 200E	N

<b>Site Name</b>	<b>Fresno - Foundry</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-019-2016
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Fresno
<b>County</b>	Fresno
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	1/1/2016
<b>Pollutant Parameters</b>	NO2
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure
<b>Address</b>	2482 Foundry Park Ave, Fresno, CA 93706
<b>GPS Coordinates (decimal degrees)</b>	36.710833N, -119.7775W
<b>Distance to roadways (meters)</b>	16 to 19 meters
<b>Traffic Count/Year</b>	93,000 AADT (FEAADT 227,505) / 2010 (Rte 99 at Jensen Avenue off-ramp, Source: Caltrans 2010 )
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved

Fresno – Foundry (1)		
Pollutant	NO <sub>2</sub>	Meteorology
Parameter code	42602	Many
Spatial scale	MC	N
Site type	HC	PE
Basic monitoring objective(s)	NC, RS, TP	RS, TP
Monitor type	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	Near-road	Near-road
FRM/FEM/ARM/Other	FEM	Other
POC	1	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A
Instrument manufacturer and model	Teledyne T500U	ITP – Hy-Cal 512AA3B, OT – MET One 060-A-2, BP – MET One 092, WD – MET One 020C, WS – METOne 010C
Analysis method	CL	Many
Method code	212	Many
Monitoring start date (MM/DD/YYYY)	01/01/16	01/01/16
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	4.6	4.6
Distance from supporting structure (meters)	1.9	1.9
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	26.3m H (north), 4m V 37m H (east), 4m V	26.3m H (north), 4m V 37m H (east), 4m V
Distance from trees (meters)	9.3m	9.3m
Distance to furnace or incinerator flue (meters)	None	None

Pollutant	NO <sub>2</sub>	Meteorology
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	3.20	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	3/16/16	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N

<b>Site Name</b>	<b>Parlier</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-019-4001
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Fresno
<b>County</b>	Fresno
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	SJVAPCD contracts out so Analytical lab varies from year to year: Speciated VOC
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	6/1/1983
<b>Pollutant Parameters</b>	Ozone, NO2, Speciated VOC, NMH
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity, barometric pressure, solar radiation
<b>Address</b>	9240 S. Riverbend Ave., Parlier, CA 93648
<b>GPS Coordinates (decimal degrees)</b>	36.5972 N, -119.5040 W
<b>Distance to roadways (meters)</b>	100m (east)
<b>Traffic Count/Year</b>	1,570/2009 (Raw traffic count in a 24-hour period for nearest roads: Lac Jac Ave south of Manning Avenue, Source: Fresno COG Fresno County Regional Traffic Monitoring Report 2013.
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Dirt, vegetation



Parlier (1)					
Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Parameter code	44201	42602	Many	43102	Many
Spatial scale	N	N	N	N	R
Site type	HC, RT	PE	PE	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	RS	RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	Other	Other	Many
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	PAMS	PAMS, RA40	PAMS	PAMS	PAMS
FRM/FEM/ARM/Other	FEM	FEM	Other	Other	Other
POC	1	1	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	N/A	N/A	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	Teledyne 200E	Xontech 910A	Synspec 115	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, RH- Vaisala HMP45D, SRD- Epply Mod.8-48, WD- Met One 020C, WS- Met One 010C
Analysis method	UV	CL	GC	GC	Many
Method code	087	099	126	011	Many
Monitoring start date (MM/DD/YYYY)	06/01/83	06/01/83	06/01/83	06/01/83	06/01/83
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	1:3	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	06/01 – 08/31	01/01 – 12/31	01/01 - 12/31
Probe height (meters)	8.7 m	8.7 m	8.7m	8.7m	8.4m
Distance from supporting structure (meters)	2.7 m	2.7m	2.7m	2.7m	4.9m

Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	39.0 m	39.0m	39.0m	39.0m	38.9
Distance from trees (meters)	11.0 m	11.0m	11.0 m	11.0m	10.2
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Teflon, glass	Teflon, glass	Stainless steel	Teflon, glass	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	13.37	13.4	4.69	13.97	N/A
Frequency of one-point QC check for gaseous instruments	daily	daily	daily	daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	N/A	N/A	N/A

Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	10/27/16	10/27/16	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N

<b>Site Name</b>	<b>Huron</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-019-2008
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Fresno
<b>County</b>	Fresno
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	09/01/09
<b>Pollutant Parameters</b>	PM2.5 Non-FEM
<b>Meteorological Parameters</b>	Barometric Pressure
<b>Address</b>	16875 4 <sup>th</sup> St, Huron, CA 93234
<b>GPS Coordinates (decimal degrees)</b>	36.2363 N, -119.7656 W
<b>Distance to roadways (meters)</b>	100 m (north)
<b>Traffic Count/Year</b>	3,250/2014 (Traffic count for nearest roads: Rte 269/Rte 198, Source: Caltrans 2014)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved, vegetative

Huron (1)		
Pollutant	PM2.5	Meteorology
Parameter code	88502	64101
Spatial scale	N	N
Site type	PE	PE
Basic monitoring objective(s)	TP	TP
Monitor type	SPM	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None
FRM/FEM/ARM/Other	Non-FEM	Other
POC	3	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N	N/A
Instrument manufacturer and model	MET One BAM 1020	ITP – Hy-Cal BA-512-A-A-3-B, BP – Met One 092
Analysis method	Beta-Attenuation	Many
Method code	731	014
Monitoring start date (MM/DD/YYYY)	09/12/09	02/01/10
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	6.42m	10m
Distance from supporting structure (meters)	1.14m	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A
Distance from trees (meters)	41.5m	N/A
Distance to furnace or incinerator flue (meters)	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360

Pollutant	PM2.5	Meteorology
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	Bi-Weekly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	None	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	None	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	05/24/16, 12/12/16	N/A
Changes planned within the next 18 months (Y/N)	N	N



<b>Site Name</b>	<b>Hanford – Irwin</b>	
<b>AQS ID (XX-XXX-XXXX)</b>	06-031-1004	
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Hanford-Corcoran	
<b>County</b>	Kings	
<b>Collecting (Operating) Agency</b>	SJVAPCD	
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB: PM10 FRM	
<b>Reporting Agency</b>	SJVAPCD: Ozone, PM10 FEM, PM2.5 FEM, NO2, Meteorology	CARB: PM10 FRM
<b>Site Start Date</b>	10/11/1993	
<b>Pollutant Parameters</b>	Ozone, PM10 FRM, PM10 FEM, PM2.5 FEM, NO2	
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure	
<b>Address</b>	807 S. Irwin St., Hanford, CA 93230	
<b>GPS Coordinates (decimal degrees)</b>	36.3147 N, -119.6440 W	
<b>Distance to roadways (meters)</b>	60 m (east)	
<b>Traffic Count/Year</b>	9,763/2013 (Traffic count for nearest roads: Hanford-Armona Rd east of S. Williams St., Source: City of Hanford Administration/Engineering Documents.)	
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved, vegetative	

Hanford – Irwin (1)						
Pollutant	Ozone	PM2.5	PM10	PM10	NO <sub>2</sub>	Meteorology
Parameter code	44201	88101	81102	81102	42602	Many
Spatial scale	N	N	N	N	N	N
Site type	HC, PE	PE	PE	PE	PE	PE
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	NC, RS	NC, RS	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS	Many
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None	None	None
FRM/FEM/ARM/Other	FEM	FEM	FRM	FEM	FEM	Other
POC	1	3	1	3	1	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary	Other	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	Y	N/A	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	MET One BAM 1020	Sierra Andersen SSI	Thermo TEOM 1400	Teledyne 200E	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	Beta Attenuation	Gravimetric	Tapered Element	CL	Many
Method code	087	170	162	079	099	Many
Monitoring start date (MM/DD/YYYY)	02/25/10	02/25/10	10/11/93	07/14/10	02/25/10	02/25/10
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	1:6	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	4.7m	4.4m	4.5m	4.4m	4.7m	9.7m
Distance from supporting structure (meters)	1.8m	1.7m	1.7m	1.7m	1.8m	N/A

Pollutant	Ozone	PM2.5	PM10	PM10	NO <sub>2</sub>	Meteorology
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	24.2m	26.5m	24.3m	26.6m	24.2m	N/A
Distance from trees (meters)	26.5 m	29.8m	26.6 m	30.1 m	26.5 m	26.6m
Distance to furnace or incinerator flue (meters)	27.5m	24.9m	28.3m	26.2m	27.5m	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	353.2	353.2	360	353.2	353.2	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex/Teflon	N/A	N/A	N/A	Pyrex/Teflon	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	13.27	N/A	N/A	N/A	14.66	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A	N/A	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	Monthly	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Biweekly	N/A	Biweekly	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A	No	N/A	N/A

Pollutant	Ozone	PM2.5	PM10	PM10	NO <sub>2</sub>	Meteorology
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	No	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	10/26/16	N/A	N/A	N/A	10/26/16	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	05/03/16, 10/26/16	05/03/16, 10/26/16	05/03/16, 10/26/16	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N	N

<b>Site Name</b>	<b>Corcoran-Patterson</b>		
<b>AQS ID (XX-XXX-XXXX)</b>	06-031-0004		
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Hanford-Corcoran		
<b>County</b>	Kings		
<b>Collecting (Operating) Agency</b>	SJVAPCD		
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	Y2016 CARB: PM2.5 FRM		
<b>Reporting Agency</b>	Y2016: CARB: PM2.5 FRM	Y2016 SJVAPCD: PM10 FEM	Y2017 SJVAPCD: PM2.5 FEM, PM10 FEM, Meteorology
<b>Site Start Date</b>	10/1/1996		
<b>Pollutant Parameters</b>	Y2016: PM2.5 FRM, PM10 FEM		Y2017: PM2.5 FEM, PM10 FEM
<b>Meteorological Parameters</b>	Y2017: Wind speed, wind direction, outdoor temperature		
<b>Address</b>	1520 Patterson Ave., Corcoran, CA 93212		
<b>GPS Coordinates (decimal degrees)</b>	36.1022 N, -119.5660 W		
<b>Distance to roadways (meters)</b>	30 m (east)		
<b>Traffic Count/Year</b>	2,965/2014 (Traffic count for nearest roads: JCT. Rte 43/Rte 137, Source: Caltrans 2014.)		
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Dirt, gravel		

Corcoran-Patterson (1)							
Pollutant	PM2.5	PM10 LC	PM10 STP	PM2.5	PM10 LC	PM10 STP	Meteorology
Parameter code	88101	85101	81102	88101	85101	81102	Many
Spatial scale	N	N	N	N	N	N	N
Site type	HC	HC, PE	HC, PE	HC, PE	HC, PE	HC, PE	GB
Basic monitoring objective(s)	NC, RS	RS, TP	NC, RS, TP	NC, RS, TP	RS, TP	NC, RS, TP	RS, TP
Monitor type	SLAMS	Other	SLAMS	SLAMS	Other	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None	None	None	None
FRM/FEM/ARM/Other	FRM	FEM	FEM	FEM	FEM	FEM	Other
POC	1	7	7	8	8	8	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Other	Primary	QA Collocated	Other	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Y	N	N	Y	N	N	N/A
Instrument manufacturer and model	Thermo Partisol 2025i	Met One 1020	Met One 1020	Teledyne 602	Teledyne 602	Teledyne 602	ITP- Hampshire Controls Corp. 125-50HLV, OT-Met One 060A-2, WD-Met One 020C, WS-Met One 010C
Analysis method	Gravimetric	Beta Attenuation	Beta Attenuation	Beta Attenuation	Beta Attenuation	Beta Attenuation	Many
Method code	145	122	122	204	205	205	Many
Monitoring start date (MM/DD/YYYY)	01/01/16	01/01/16	01/01/16	01/01/17	01/01/17	01/01/17	01/01/17
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:3	Hourly	Hourly	Hourly	Hourly	Hourly	Hourly



Pollutant	PM2.5	PM10 LC	PM10 STP	PM2.5	PM10 LC	PM10 STP	Meteorology
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	5.9 m	5.7 m	5.9 m	5.7 m	5.7 m	5.9 m	5.6 m
Distance from supporting structure (meters)	1.9 m	1.6 m	1.9 m	1.6 m	1.6 m	1.9 m	N/A
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	115.7 m H, 1.5 m V	118.1 m H, 1.5 m V	118.11 m H, 1.5 m V	118.1 m H, 1.5 m V	118.1 m H, 1.5 m V	118.11 m H, 1.5 m V	118.6 m H, 1.5 m V
Distance from trees (meters)	62.5 m E, 65.2 m S	63.7 m E, 65.9 m S	63.7 m E, 65.9 m S	63.7 m E, 65.9 m S	63.7 m E, 65.9 m S	63.7 m E, 65.9 m S	65.5 m E, 66.3 m S
Distance to furnace or incinerator flue (meters)	79.1 m	76.6 m	76.6 m	76.6 m	76.6 m	76.6 m	76.8 m
Distance between monitors fulfilling a QA collocation requirement (meters).	3.6 m	3.6 m	N/A	3.6 m	3.6 m	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	355	355	355	355	355	355	355
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Pollutant	PM2.5	PM10 LC	PM10 STP	PM2.5	PM10 LC	PM10 STP	Meteorology
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	Monthly	N/A	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Biweekly	Biweekly	Biweekly	Biweekly	Biweekly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	No.	No	No.	No.	No	No.	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Pollutant	PM2.5	PM10 LC	PM10 STP	PM2.5	PM10 LC	PM10 STP	Meteorology
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	05/17/16, 12/13/16	05/17/16, 12/13/16	05/17/16, 12/13/16	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	Yes - Thermo Partisol 2025i will be replaced with a Teledyne 602	Yes - Met One 1020 will be replaced with a Teledyne 602	Yes- Met One 1020 will be replaced with a Teledyne 602	N	N	N	N

<b>Site Name</b>	<b>Visalia - Airport</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-107-3000
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Visalia-Porterville
<b>County</b>	Tulare
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	07/01/98
<b>Pollutant Parameters</b>	None
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity, barometric pressure, solar radiation, radio acoustic sounding system (RASS)
<b>Address</b>	9501 West Airport Drive, Visalia, CA 93277
<b>GPS Coordinates (decimal degrees)</b>	39.3266 N, -119.3984 W
<b>Distance to roadways (meters)</b>	100m (west)
<b>Traffic Count/Year</b>	56,000/2014 (Traffic count for nearest roads: JCT. Rte 99/Rte 198 East., Source: Caltrans 2014.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Dirt, vegetative

Visalia – Airport (1)	
Pollutant	Meteorology
Parameter code	Many
Spatial scale	R
Site type	GB
Basic monitoring objective(s)	RS, TP
Monitor type	PAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None
FRM/FEM/ARM/Other	Other
POC	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A
Instrument manufacturer and model	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, RH- Vaisala HMP45D, SRD- Epply Mod. 8-48WD- Met One 020C, WS-Met One 010C
Analysis method	Many
Method code	Many
Monitoring start date (MM/DD/YYYY)	07/01/98
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31
Probe height (meters)	9.5m
Distance from supporting structure (meters)	16.5m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	50.9m H 0.0m V
Distance from trees (meters)	2.1m
Distance to furnace or incinerator flue (meters)	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	270

Pollutant	Meteorology
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A
Frequency of one-point QC check for gaseous instruments	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the level? If yes, please list distance (meters) and instrument(s).	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the level? If yes, please list distance (meters) and instrument(s).	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A
Changes planned within the next 18 months (Y/N)	Yes. Lower air profiler operating at site may be cease operation due to changes to PAMS program requirements. Site may subsequently be completely shut down as well.



<b>Site Name</b>	<b>Visalia – Church St</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-107-2002
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Visalia–Porterville
<b>County</b>	Tulare
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	1/1/1979
<b>Pollutant Parameters</b>	Ozone, PM10 FEM, PM2.5 FRM, PM2.5 FEM, PM2.5 Speciation (Supplemental), NO <sub>2</sub>
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity
<b>Address</b>	310 N. Church St., Visalia CA 93291
<b>GPS Coordinates (decimal degrees)</b>	36.3325 N, -119.2909 W
<b>Distance to road</b>	25 m (west)
<b>Traffic Count/Year</b>	3,980/2014 (Traffic count for nearest roads: W. Center Ave. between N. Court St. and N. Santa Fe St., Source: City of Visalia Traffic and Engineering.)
<b>Ground Cover</b>	Paved

Visalia–Church St (1)				
Pollutant	Ozone	NO <sub>2</sub>	PM <sub>10</sub> STP	PM <sub>2.5</sub>
Parameter code	44201	42602	81102	88101
Spatial scale	N	N	N	N
Site type	GB	PE	PE	PE, HC
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	NC, RS, TP	NC, RS
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None
FRM/FEM/ARM/Other	FEM	FRM	FEM	FRM
POC	1	1	5	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	Y
Instrument manufacturer and model	API/Teledyne 400	API 200E	Met One 1020	R&P 2025
Analysis method	UV	Gas phase Chem.	Beta attenuation	Gravimetric
Method code	087	099	122	145
Monitoring start date (MM/DD/YYYY)	1/1/1979	1/1/1979	8/1/2015	1/3/1999
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly	1:3
Sampling season (MM/DD - MM/DD)	01/01 -12/31	01/01 -12/31	01/01 -12/31	01/01 -12/31
Probe/Inlet height above ground (meters)	6.7	6.7	6.2	5.9
Distance from supporting structure (meters)	2.8	2.8	2.3	2.1
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None
Distance from trees (meters)	None	None	None	None
Distance to furnace or incinerator flue (meters)	None	None	None	None
Distance between collocated monitors (meters)	None	None	N/A	2.3
Unrestricted airflow (degrees)	360	360	360	360
Probe material (Teflon, etc.)	Teflon	Teflon	N/A	N/A

Pollutant	Ozone	NO <sub>2</sub>	PM <sub>10</sub> STP	PM <sub>2.5</sub>
Residence time (seconds)	9.62	10.01	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	No	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	N/A	N/A	Monthly
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	Monthly	N/A
Frequency of one-point QC check (gaseous)	5x/week	5x/week	N/A	N/A
Last Annual Performance Evaluation (gaseous)	11/16/2016	11/16/2016	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	N/A	05/03/2016, 11/16/2016	05/03/2016, 11/16/2016
Changes planned within the next 18 months (Y/N)	N	N	N	Y

Visalia – Church St (2)			
Pollutant	PM <sub>2.5</sub>	PM <sub>2.5</sub> Speciation	Meteorology
Parameter code	88502	Many	Many
Spatial scale	N	N	R
Site type	RT, PE	PE	General
Basic monitoring objective(s)	RS, TP	RS	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	Supplemental Speciation	None
FRM/FEM/ARM/Other	Non-FEM	FRM	Other
POC	3	5	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N	N/A	N/A

Pollutant	PM2.5 Speciation	PM2.5 Speciation	Meteorology
Instrument manufacturer and model	Met One 1020	Many	Many
Analysis method	Beta attenuation	Many	Many
Method Code	731	Many	Many
Monitoring start date (MM/DD/YYYY)	11/01/01	01/14/02	01/01/95
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:3	Hourly
Sampling season (MM/DD - MM/DD)	01/01 -12/31	01/01 -12/31	01/01 -12/31
Probe height (meters)	6.0	5.9	11.9
Distance from supporting structure (meters)	2.2	None	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from trees (meters)	None	None	None
Distance to furnace or incinerator flue (meters)	None	None	None
Distance between collocated monitors (meters)	2.3	None	None
Unrestricted airflow (degrees)	360	360	360
Probe material (Teflon, etc.)	N/A	N/A	N/A
Residence time (seconds)	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	No	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	Monthly	N/A	N/A
Frequency of one-point QC check (gaseous)	N/A	N/A	N/A
Last Annual Performance Evaluation (gaseous)	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	05/03/2016, 11/16/2016	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N

<b>Site Name</b>	<b>Porterville</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-107-2010
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Visalia-Porterville
<b>County</b>	Tulare
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	3/8/2010
<b>Pollutant Parameters</b>	Ozone, PM2.5 FEM
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure
<b>Address</b>	1839 S. Newcomb St., Porterville, CA 93257
<b>GPS Coordinates (decimal degrees)</b>	36.0310 N, -119.0550 W
<b>Distance to roadways (meters)</b>	100m (south)
<b>Traffic Count/Year</b>	2,953/2013 (Traffic count average for two 24-hour periods for nearest roads: Ave 128 west of Road 238, Source: Tulare County Association of Governments.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved, vegetative

Porterville (1)			
Pollutant	Ozone	PM2.5	Meteorology
Parameter code	44201	88502	Many
Spatial scale	N	N	N
Site type	HC, PE	PE	PE
Basic monitoring objective(s)	NC, RS, TP	TP	TP
Monitor type	SLAMS	SPM	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None
FRM/FEM/ARM/Other	FEM	Non-FEM	Other
POC	1	3	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Other	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N	N/A
Instrument manufacturer and model	Teledyne 400E	MET One BAM 1020	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS- Met One 010C
Analysis method	UV	Beta Attenuation	Many
Method code	087	731	Many
Monitoring start date (MM/DD/YYYY)	03/08/10	03/08/10	03/08/10
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 -12/31	01/01 -12/31	01/01 -12/31
Probe height (meters)	9 m	4.3m	9.1m
Distance from supporting structure (meters)	7.1 m	1.8m	7.1m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	2.1/0.0m	3.5/0.0m	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A
Distance from trees (meters)	8.2 m SE 11.5 m N	9.4m SE 15.4m N	8.3m SE 14.9m N
Distance to furnace or incinerator flue (meters)	175.5m S	174m S	175.8m S



Pollutant	Ozone	PM2.5	Meteorology
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	357	357	357
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	13.94	N/A	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Biweekly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	05/23/16	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	05/23/16, 12/13/16	N/A
Changes planned within the next 18 months (Y/N)	N	N	N

<b>Site name</b>	<b>Sequoia–Ash Mountain</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-107-0009
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Visalia-Porterville
<b>County</b>	Tulare
<b>Collecting (Operating) Agency</b>	All equipment operated by NPS
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	All data reported by NPS
<b>Site Start Date</b>	7/1/1999
<b>Pollutant Parameters</b>	Ozone, PM2.5 FEM
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity, solar radiation
<b>Address</b>	Ash Mountain, Sequoia National Park 47050 Generals Hwy, Three Rivers, CA 93271
<b>GPS Coordinates (decimal degrees)</b>	36.4894 N, -118.8290 W
<b>Distance to road</b>	120 m (north)
<b>Traffic Count/Year</b>	1,550/2014 (Rte 198 / Sequoia National Park boundary, Source: Caltrans Back AADT 2014)
<b>Ground Cover</b>	Dirt, vegetative

Sequoia–Ash Mountain (1)			
Pollutant	Ozone	PM2.5	Meteorology
Parameter code	44201	88501	Many
Spatial scale	R	R	R
Site type	HC, RT	RT	GB
Monitor objective	NC, RS, TP	RS, TP	RS, TP
Monitor type	Non-EPA Federal	Non-EPA Federal	Non-EPA Federal
Network affiliation	Castnet	IMPROVE	Castnet
FRM/FEM/ARM/Other	Other	FEM	Other
POC	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N	N/A
Instrument manufacturer and model	Thermo TECO 49, 49C	BAM 1020	Many
Analysis method	UV	Beta Attenuation	Many
Method code	047	750	Many
Monitoring start date (MM/DD/YYYY)	07/01/1999	3/19/2007	10/4/2001
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	10	4	10
Distance from supporting structure (meters)	3	1.5	3
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	5	N/A	5
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A
Distance from trees (meters)	15 – 20	15 – 20	15 – 20
Distance to furnace or incinerator flue (meters)	305	305	305
Distance between monitors fulfilling a QA collocation requirement (meters).	3	3	3
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Teflon	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	13.4	N/A	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A	N/A

Pollutant	Ozone	PM2.5	Meteorology
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	Bi-Weekly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	05/17/2016, 04/06/2017	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	10/12/2016, 02/08/2017	N/A
Changes planned within the next 18 months (Y/N)	N	N	N

<b>Site name</b>	<b>Sequoia–Lower Kaweah</b>
<b>AQS ID (XX-XXX-XXXX)</b>	061070006
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Visalia-Porterville
<b>County</b>	Tulare
<b>Collecting (Operating) Agency</b>	All equipment operated by NPS
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	All data reported by NPS
<b>Site Start Date</b>	1/1/1987
<b>Pollutant Parameters</b>	Ozone, NADP (wet deposition)
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity, solar radiation
<b>Address</b>	Giant Forest, Sequoia National Park, 47050 Generals Highway, Three Rivers, CA 93271
<b>GPS Coordinates (decimal degrees)</b>	36.5661 N, -118.7776 W
<b>Distance to road</b>	380 m (southeast)
<b>Traffic Count/Year</b>	1,550/2014 (Rte 198 / Sequoia National Park boundary, Source: Caltrans Back AADT 2014)
<b>Ground Cover</b>	Dirt, vegetation

Sequoia–Lower Kaweah (1)		
Pollutant	Ozone	Meteorology
Parameter code	44201	Many
Spatial scale	R	R
Site type	RT	GB
Monitor objective	NC, RS, TP	RS, TP
Monitor type	Non-EPA Federal	Non-EPA Federal
Network affiliation	None	None
FRM/FEM/ARM/Other	Other	Other
POC	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A
Instrument manufacturer and model	Thermo TECO 49, 49C	Many
Analysis method	UV	Many
Method code	047	Many
Monitoring start date (MM/DD/YYYY)	01/01/1987	04/01/1987
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	5	5
Distance from supporting structure (meters)	1.5	10
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	1	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A
Distance from trees (meters)	5-10	5-10
Distance to furnace or incinerator flue (meters)	457	457
Distance between monitors fulfilling a QA collocation requirement (meters).	5-10	10-15
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360

Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Teflon	N/A
<b>Pollutant</b>	<b>Ozone</b>	<b>Meteorology</b>
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	13.9	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	05/17/2016, 04/04/2017	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N



Site Name	Shafter	
AQS ID (XX-XXX-XXXX)	06-029-6001	
Representative statistical area Name (i.e. MSA, CBSA, other)	Bakersfield	
County	Kern	
Collecting (Operating) Agency	CARB: Ozone, NO2;	SJVAPCD: Meteorology, Speciated VOC, NMH
Analytical Lab (i.e. weigh lab, toxics lab, other)	CARB: Ozone, NO2	SJVAPCD contracts out so lab varies from year to year: Speciated VOC, NMH
Reporting Agency	CARB: Ozone, NO2	SJVAPCD: Speciated VOC, NMH, Meteorology
Site Start Date	1/1/1989	
Pollutant Parameters	Ozone, NO2, Speciated VOC, NMH	
Meteorological Parameters	Wind speed, wind direction, outdoor temperature, relative humidity, barometric pressure, solar radiation	
Address	578 Walker St., Shafter, CA 93263	
GPS Coordinates (decimal degrees)	35.5034 N, -119.2726 W	
Distance to roadways (meters)	10m (southwest)	
Traffic Count/Year	2,766/2015 (Traffic count for nearest roads: Central Ave and Walker St., Source: Kern Council of Governments.)	
Groundcover (e.g. paved, vegetative, dirt, sand, gravel)	Paved	

Shafter (1)					
Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Parameter code	44201	42602	43102	Many	Many
Spatial scale	N	N	N	N	R
Site type	GB, PE	PE	PE	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS, TP	RS	RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	Other	Other	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	PAMS	PAMS	PAMS	PAMS	Other
FRM/FEM/ARM/Other	FEM	FRM	Other	Other	Other
POC	1	1	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Other	Other	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E (ARB)	API 200E	Xontech 910A	Synspec Alpha 115	ITP- Hy-Cal BA512AA3BB, OT- Met One 060A-2, SRD-Epply Mod. 8-48, WD- Met One 020B, WS- Met One 010C, BP- Met One 092
Analysis method	UV	CL	GC	GC	Many
Method code	087	099	164	011	Many
Monitoring start date (MM/DD/YYYY)	07/01/89	07/01/89	07/01/94	07/01/94	01/01/89
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	1:3	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	06/01 – 08/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	7.3	7.3	7.0	7.0	10
Distance from supporting structure (meters)	2.6	2.6	2.4	2.4	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None	None	None

Pollutant	Ozone	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	19m H, 2m V (Tree)	19m H, 2m V (Tree)	N/A
Distance from trees (meters)	None	None	19m N, 70m SE	19m N, 70m SE	70m SE
Distance to furnace or incinerator flue (meters)	None	None	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	None	None	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360	355	350	360
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	TEFLON	TEFLON	Stainless Steel	Pyrex & Teflon	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	15.8	15.8	2.79	< 14 sec.	N/A
Frequency of one-point QC check for gaseous instruments	Daily	Daily	N/A	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	10/11/2016	10/11/2016	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N

<b>Site Name</b>	<b>Oildale</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-0232
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	1/1/80
<b>Pollutant Parameters</b>	Ozone, PM10 FRM
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, sonic temperature, relative humidity
<b>Address</b>	3311 Manor St, Oildale CA 93308
<b>GPS Coordinates (decimal degrees)</b>	35.4380 N, -119.0167 W
<b>Distance to road</b>	150 m (northwest)
<b>Traffic Count/Year</b>	7,315/2016 (Traffic count for roads: Manor St. between Day Ave and Felton St., Source: Kern Council of Governments.)
<b>Ground Cover</b>	Dirt, vegetative

Oildale (1)			
Pollutant	Ozone	PM10 STP	Meteorology
Parameter code	44201	81102	Many
Spatial scale	U	MD	U
Site type	HC, RT	SO	GB
Basic monitoring objective(s)	NC, RS, TP	NC, RS	NC
Monitor type	SLAMS	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None
FRM/FEM/ARM/Other	FEM	FRM	Other
POC	1	2	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A
Instrument manufacturer and model	API/Teledyne 400	Sierra Anderson 1200	RM Young 81000, Vaisala HMP 155
Analysis method	UV	Gravimetric	Many
Method code	087	063	Many
Monitoring start date (MM/DD/YYYY)	01/01/84	01/01/87	01/01/99, 03/06/04, 10/01/05
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:6	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe/Inlet height above ground (meters)	6.7	2.2 m	8.5 m
Distance from supporting structure (meters)	3.0	1.5	1.3 m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from trees (meters)	10.1 to dripline	None	None
Distance to furnace or incinerator flue (meters)	None	None	None
Distance between collocated monitors (meters)	N/A	N/A	N/A
Unrestricted airflow (degrees)	360	360	360
Probe material (Teflon, etc.)	Teflon	N/A	N/A
Residence time (seconds)	10.1	N/A	N/A

Pollutant	Ozone	PM10 STP	Meteorology
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	Monthly	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	Daily	N/A	N/A
Last Annual Performance Evaluation (gaseous)	11/15/2016	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	03/24/2016, 09/22/2016	N/A
Changes planned within the next 18 months (Y/N)	N	Yes. Hi-vol will be replaced with a BAM1020 after safety repairs are made to the station's rooftop.	N

<b>Site Name</b>	<b>Bakersfield – Golden/M St</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-0010
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	6/10/2014
<b>Pollutant Parameters</b>	PM10 FRM and PM2.5 FRM
<b>Meteorological Parameters</b>	None
<b>Address</b>	2820 M St., Bakersfield, CA 93301
<b>GPS Coordinates (decimal degrees)</b>	35.385574 N, -119.015009 W
<b>Distance to roadways (meters)</b>	13 M
<b>Traffic Count/Year</b>	4,418/2016 (Traffic count for nearest roads: 30 St. at Golden State Ave., Source: Kern Council of Governments.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved



Bakersfield – Golden/M St (1)		
Pollutant	PM2.5	PM10
Parameter code	88101	81102
Spatial scale	MC	MC
Site type	PE	PE
Basic monitoring objective(s)	NC, RS	NC, RS
Monitor type	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None
FRM/FEM/ARM/Other	FRM	FRM
POC	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Y	N/A
Instrument manufacturer and model	R & P Model 2025	Hi Vol SSI Ecotech Model 3000
Analysis method	Gravimetric	Gravimetric
Method code	145	162
Monitoring start date (MM/DD/YYYY)	07/02/14	04/01/15
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:3	1:6
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	6.2 m	5.9m
Distance from supporting structure (meters)	2.1m	1.8m
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	H - 11m (Tree), V - 5m	H - 12m, (Tree), V - 5m
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None
Distance from trees (meters)	11m WSW	12m WSW
Distance to furnace or incinerator flue (meters)	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	340	340
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A

Pollutant	PM2.5	PM10
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	Monthly	Monthly
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	No	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	No	No
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	03/23/16; 09/22/16	03/23/16; 09/22/16
Changes planned within the next 18 months (Y/N)	N	N

<b>Site Name</b>	<b>Bakersfield–California</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-0014
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	3/1/94
<b>Pollutant Parameters</b>	Ozone, PM10 FRM, PM2.5 FRM, PM2.5 Non-FEM, NO <sub>2</sub> , Toxics, PM2.5 Speciation (STN)
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, sonic temperature, relative humidity
<b>Address</b>	5558 California Ave., Bakersfield CA 93309
<b>GPS Coordinates (decimal degrees)</b>	35.3566 N, -119.0626 W
<b>Distance to road</b>	300 m (south)
<b>Traffic Count/Year</b>	33,017/2016 (Traffic count for roads: California Ave between Stockdale Hwy and Dunsmuir Rd., Source: Kern Council of Governments.)
<b>Ground Cover</b>	Paved

Bakersfield – California (1)					
Pollutant	Ozone	PM10 STP	PM10 STP	PM2.5	PM2.5
Parameter code	44201	81102	81102	88101	88101
Spatial scale	N	N	N	N	N
Site type	HC, GB	PE	PE, QA	HC, PE	HC, PE, QA
Basic monitoring objective(s)	NC, RS, TP	NC, RS	NC, RS	NC, RS	NC, RS
Monitor type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None	None	None	None
FRM/FEM/ARM/Other	FEM	FRM	FRM	FRM	FRM
POC	1	1	2	1	2
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	QA Collocated	Primary	QA Collocated
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	Y	Y
Instrument manufacturer and model	API/Teledyne 400E	SA/GMW 1200	SA/GMW 1200	Thermo 2025i	Thermo 2025i
Analysis method	UV	Gravimetric	Gravimetric	Gravimetric	Gravimetric
Method code	087	063	063	145	145
Monitoring start date (MM/DD/YYYY)	3/1/1994	4/1/1994	1/3/2003	1/1/1999	1/1/1999
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:6	1:6	1:1	1:12
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe/Inlet height above ground (meters) (ground to rooftop = 4.1m)	7.2	5.62	5.62	6.23	6.23
Distance from supporting structure (above rooftop) (meters)	3.1	1.52	1.52	2.13	2.13

Pollutant	Ozone	PM10 STP	PM10 STP	PM2.5	PM2.5
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	5.5 rooftop access	7 rooftop access	10 rooftop access	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	1.2 H x 4.37 D parapet	None	None	1.2 H x 3.12 D parapet	1.2 H x 3.12 D parapet
Distance from trees (meters)	7	10.5	10	9.5	11.5
Distance to furnace or incinerator flue (meters)	3	3	2.8	2.7	3.5
Distance between collocated monitors (meters)	N/A	3.5	3.5	2.3	2.3
Unrestricted airflow (degrees)	360	360	360	360	360
Probe material (Teflon, etc.)	Teflon	N/A	N/A	N/A	N/A
Residence time (seconds)	11.58	N/A	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	No	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	No	No	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	Monthly	Monthly	Monthly	Monthly
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	N/A	N/A	N/A

Pollutant	Ozone	PM10 STP	PM10 STP	PM2.5	PM2.5
Frequency of one-point QC check (gaseous)	Daily	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation (gaseous)	10/26/2016	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	06/30/2016, 08/25/2016	06/30/2016, 08/25/2016	05/18/2016, 11/16/2016	05/18/2016, 11/16/2016
Changes planned within the next 18 months (Y/N)	N	N	N	N	N

Bakersfield – California (2)				
Pollutant	PM2.5	PM2.5 Speciation	PM2.5 Speciation	PM2.5 Speciation
Parameter code	88502	88356	Many	Many
Spatial scale	N	N,U	N,U	N,U
Site type	PE	PE, QA	PE	PE, QA
Basic monitoring objective(s)	RS, TP	RS	RS	RS
Monitor type	SLAMS	SLAMS	Other	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	STN	CSN STN	CSN STN
FRM/FEM/ARM/Other	Non-FEM	Other	Other	Other
POC	3	6	5	6
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary & QA Collocated	Primary	QA Collocated
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N	N/A	N/A	N/A
Instrument manufacturer and model	Met One BAM 1020	URG 3000-N	Met One SASS	Met One SASS
Analysis method	Beta Attenuation	Cyclone inlet	Many	Many
Method code	731	839	810	810
Monitoring start date (MM/DD/YYYY)	11/01/01	05/03/07	01/01/01	01/01/01
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:3	1:3	1:6

Pollutant	PM2.5	PM2.5 Speciation	PM2.5 Speciation	PM2.5 Speciation
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	
Probe/Inlet height above ground (meters)	6.43	6.15	5.95	5.95
Distance from supporting structure (meters)	2.33	2.05	1.85	1.85
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	5 rooftop access	11 & 13 rooftop access	7.5 rooftop access	9.5 rooftop access
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	1.2 H x 4.37 D	Parapet height of 1.1 m surrounding rooftop (1.2 H x 7.0 D)	1.2 H x 7.0 D	1.2 H x 7.0 D
Distance from trees (meters)	8.5	7 & 9	7	8
Distance to furnace or incinerator flue (meters)	1.5	5 & 7	5	6
Distance between collocated monitors (meters)	N/A	1.5 & 1.5	2	2
Unrestricted airflow (degrees)	360	360 & 360	360	360
Probe material (Teflon, etc.)	N/A	N/A	N/A	N/A
Residence time (seconds)	N/A	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the inlet? If yes, please list distance (meters) and instrument(s).	No	No	No	No
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the inlet? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	Monthly	Monthly	Monthly



Pollutant	PM2.5	PM2.5 Speciation	PM2.5 Speciation	PM2.5 Speciation
Frequency of flow rate verification for automated PM analyzers audit	Monthly	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation (gaseous)	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	03/24/2015, 09/23/2015	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	(Y) Replacement of P/C samplers	N	N

Bakersfield – California (3)				
Pollutant	NO <sub>2</sub>	Toxics	Toxics	Meteorology
Parameter code	42602	Many	Many	Many
Spatial scale	N	N	N	R
Site type	PE	PE	PE, QA	GB
Basic monitoring objective(s)	NC, RS, TP	RS, TP	RS, TP	RS, TP
Monitor type	SLAMS	Many	Many	Many
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	CA Air Toxics	CA Air Toxics	SLAMS
FRM/FEM/ARM/Other	FRM	Other	Other	Other
POC	1	Many	Many	Many
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	QA Collocated	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A
Instrument manufacturer and model	API 200E	Xontech 924	Xontech 924	Many
Analysis method	CL	Many	Many	Many
Method code	099	Many	Many	Many
Monitoring start date (MM/DD/YYYY)	04/01/94	01/01/07	01/01/07	04/01/94

Pollutant	NO <sub>2</sub>	Toxics	Toxics	Meteorology
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	1:12	1:12	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe/Inlet height above ground (meters)	7.2	5.7	5.7	13.8
Distance from supporting structure (meters)	3.1	1.9	1.9	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	5.5	7.5	9.5	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	1.2 H x 4.37 D	1.2 H x 3.89 D	1.2 H x 3.89 D	None
Distance from trees (meters)	7	14	15	None
Distance to furnace or incinerator flue (meters)	3	2	3	None
Distance between collocated monitors (meters)	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees)	360	360	360	360
Probe material (Teflon, etc.)	Teflon	N/A	N/A	N/A
Residence time (seconds)	9.29	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A

Pollutant	NO <sub>2</sub>	Toxics	Toxics	Meteorology
Frequency of flow rate verification for manual PM samplers audit	N/A	Monthly	Monthly	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	Daily	N/A	N/A	N/A
Last Annual Performance Evaluation (gaseous)	10/26/2016	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	06/23/2016, 12/22/2016	06/23/2016, 12/22/2016	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N

<b>Site Name</b>	<b>Bakersfield - Muni</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-2012
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	SJVAPCD contracts out so lab varies from year to year: Speciated VOC
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	06/01/12
<b>Pollutant Parameters</b>	Ozone , CO, NO2, Speciated VOC, NMH
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, relative humidity, barometric pressure, solar radiation
<b>Address</b>	2000 South Union Ave., Bakersfield, CA 93307
<b>GPS Coordinates (decimal degrees)</b>	35.3313 N, -119.0000 W
<b>Distance to roadways (meters)</b>	280m (west)
<b>Traffic Count/Year</b>	21,165/2015 (Traffic count for street address): S. Union Ave between E Casa Loma Dr and Watts Dr.) 5,039/2016 (Traffic count for road adjacent to monitoring station: Watts Dr between S. Union Ave and Short St.) Source: Kern Council of Governments.
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Paved

Bakersfield – Muni (1)						
Pollutant	Ozone	CO	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Parameter code	44201	42101	42602	Many	43102	Many
Spatial scale	N	N	N	N	N	R
Site type	HC	PE	HC	HC	PE	GB
Basic monitoring objective(s)	NC, RS, TP	NC	NC, RS	RS	RS	RS, TP
Monitor type	SLAMS	SLAMS	SLAMS	Other	Other	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	PAMS	PAMS	PAMS, RA40	PAMS	PAMS	PAMS
FRM/FEM/ARM/Other	FEM	FEM	FEM	Other	Other	Other
POC	1	1	1	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	N/A	N/A	N/A	N/A	N/A	N/A
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A	N/A	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	Thermo 48i TLE	Teledyne 200E	Xontech 910/ Xontech 925	Synspec Alpha 115	Many
Analysis method	UV Absorption	Non-dispersive IR	Chem.	GC / UV Absorption	TEI 55: Propane	Many
Method code	087	554	099	177 / 202	011	Many
Monitoring start date (MM/DD/YYYY)	06/01/12	07/01/12	07/01/12	06/01/12	10/01/12	07/01/12
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly	1:3	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31	06/01 – 08/31	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	6.0m	6.0m	6.0m	6.3m	6.0m	10m
Distance from supporting structure (meters)	2.1m	2.1m	2.1m	2.4m	2.1m	N/A

Pollutant	Ozone	CO	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A	N/A	N/A	N/A	N/A
Distance from trees (meters)	Over 75 m	Over 75 m	Over 75 m	Over 75 m	Over 75 m	Over 75 m
Distance to furnace or incinerator flue (meters)	N/A	N/A	N/A	N/A	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	350	350	350	350	350	350
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex & Teflon	Pyrex & Teflon	Pyrex & Teflon	Stainless Steel	Pyrex & Teflon	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	11.4	11.1	10.7	4	11	N/A
Frequency of one-point QC check for gaseous instruments	Daily	Daily	Daily	N/A	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A	N/A	N/A	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the level? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A	N/A

Pollutant	Ozone	CO	NO <sub>2</sub>	Speciated VOC	NMH	Meteorology
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A	N/A	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	03/23/16	03/23/16	03/23/16	N/A	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N	N	N	N



<b>Site Name</b>	<b>Bakersfield–Airport (Planz)</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-0016
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	CARB
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	9/19/00
<b>Pollutant Parameters</b>	PM2.5 FRM
<b>Meteorological Parameters</b>	None
<b>Address</b>	401 E. Planz Rd., Bakersfield CA 93307
<b>GPS Coordinates (decimal degrees)</b>	35.3246 N, -118.9976 W
<b>Distance to road</b>	500 m (west)
<b>Traffic Count/Year</b>	17,536/2016 (Traffic count for nearest cross street): S. Union Ave between E. Planz Rd and E White Lane) 5,039/2016 (Traffic count for monitoring station's street address) Source: Kern Council of Governments.
<b>Ground Cover</b>	Paved

Bakersfield–Airport (Planz) (1)	
<b>Pollutant</b>	<b>PM2.5</b>
Parameter code	88101
Spatial scale	N
Site type	PE, HC
Basic monitoring objective(s)	NC, RS
Monitor type	SLAMS
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None
FRM/FEM/ARM/Other	FRM
POC	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as “N/A”.)	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	Y
Instrument manufacturer and model	R&P 2025
Analysis method	Gravimetric
Method code	145
Monitoring start date (MM/DD/YYYY)	09/19/00
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	1:3
Sampling season	01/01 – 12/31
Probe Inlet height above ground (meters)	2.0
Distance from supporting structure (meters)	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None
Distance from trees (meters)	None
Distance to furnace or incinerator flue (meters)	None
Distance between collocated monitors (meters)	None
Unrestricted airflow (degrees)	360
Probe material (Teflon, etc.)	N/A
Residence time (seconds)	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A

Pollutant	PM2.5
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A
Frequency of flow rate verification for manual PM samplers audit	Monthly
Frequency of flow rate verification for automated PM analyzers audit	N/A
Frequency of one-point QC check (gaseous)	N/A
Last Annual Performance Evaluation (gaseous)	N/A
Last two semi-annual flow rate audits for PM monitors	03/22/2016, 09/21/2016
Changes planned within the next 18 months (Y/N)	N

<b>Site Name</b>	<b>Edison</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-0007
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	1/1/80
<b>Pollutant Parameters</b>	Ozone, NO <sub>2</sub>
<b>Meteorological Parameters</b>	Wind speed, wind direction, outside temperature, relative humidity
<b>Address</b>	Johnston Farms-Shed Rd., Edison, CA 93320
<b>GPS Coordinates (decimal degrees)</b>	35.34561 N, -118.85183 W
<b>Distance to road</b>	450 m (south)
<b>Traffic Count/Year</b>	3,830/2016 (Traffic count for nearest roads: Comanche Dr. and Edison Hwy., Source: Kern Council of Governments.)
<b>Ground Cover</b>	Dirt, vegetative

Edison (1)			
Pollutant	Ozone	NO <sub>2</sub>	Meteorology
Parameter code	44201	42602	Many
Spatial scale	N	N	R
Site type	HC, RT	PE	GB
Monitoring objective	NC, RS, TP	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS	Other
Network affiliation	SLAMS	SLAMS	SLAMS
FRM/FEM/ARM/Other	FEM	FRM	Other
POC	1	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A	N/A
Instrument manufacturer and model	API/Teledyne 400	API 200 E	RM Young 81000
Analysis method	UV	CL	Many
Method code	087	099	Many
Monitoring start date (MM/DD/YYYY)	01/01/81	01/01/80	01/01/95
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31	01/01 – 12/31
Probe/Inlet height above ground (meters)	5.4	5.4	10 m (OT 2.1 m)
Distance from supporting structure (meters)	1.5	1.5	None
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None	None
Distance from trees (meters)	16.1 m (11.0 m to dripline)	16.1 m (11.0 m to dripline)	18.5
Distance to furnace or incinerator flue (meters)	None	None	None
Distance between collocated monitors (meters)	N/A	N/A	N/A
Unrestricted airflow (degrees)	360	360	360
Probe material (Teflon, etc.)	Teflon	Teflon	N/A
Residence time (seconds)	11.8	14.5	N/A

Pollutant	Ozone	NO <sub>2</sub>	Meteorology
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A	N/A
Frequency of one-point QC check (gaseous)	Daily	Daily	N/A
Last Annual Performance Evaluation (gaseous)	10/12/16	10/12/16	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N	N

<b>Site Name</b>	<b>Arvin–Di Giorgio</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-5002
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	CARB
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	CARB
<b>Site Start Date</b>	11/16/2009
<b>Pollutant Parameters</b>	Ozone
<b>Meteorological Parameters</b>	Outdoor temperature, wind speed, wind direction, sonic temperature, relative humidity
<b>Address</b>	19405 Buena Vista Blvd, Arvin CA 93203
<b>GPS Coordinates (decimal degrees)</b>	35.2391 N, -118.7886 W
<b>Distance to road</b>	10 m (east)
<b>Traffic Count/Year</b>	581/2016 (Traffic count for Buena Vista Blvd east of Tejon Hwy., Source: Kern Council of Governments.)
<b>Ground Cover</b>	Dirt, vegetative



Arvin–Di Giorgio (1)		
Pollutant	Ozone	Meteorology
Parameter code	44201	Many
Spatial scale	N	R
Site type	HC, PE	GB
Monitor objective	NC, RS, TP	RS, TP
Monitor type	SLAMS	SLAMS (WD, WS), Other (OT, RH)
Network affiliation	PAMS (pending)	PAMS (pending)
FRM/FEM/ARM/Other	FEM	Other
POC	1	2
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Primary
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A
Instrument manufacturer and model	API 400E	RM Young 81000, Vaisala HMP155
Analysis method	UV	Many
Method code	087	Many
Monitoring start date (MM/DD/YYYY)	11/16/2009	11/16/2009
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	4.4	10
Distance from supporting structure (meters)	1.8	N/A
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	None	None
Distance from trees (meters)	>10 m	18.5
Distance to furnace or incinerator flue (meters)	None	None
Distance between collocated monitors (meters)	None	None
Unrestricted airflow (degrees)	360	360
Probe material (Teflon, etc.)	TEFLON	Teflon
Residence time (seconds)	13.02	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	N/A	N/A

<b>Pollutant</b>	<b>Ozone</b>	<b>Meteorology</b>
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
Frequency of flow rate verification for manual PM samplers audit	N/A	N/A
Frequency of flow rate verification for automated PM analyzers audit	N/A	N/A
Frequency of one-point QC check (gaseous)	Daily	N/A
Last Annual Performance Evaluation (gaseous)	10/12/2016	N/A
Last two semi-annual flow rate audits for PM monitors	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N

<b>Site Name</b>	<b>Maricopa</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-0008
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	7/1/1987
<b>Pollutant Parameters</b>	Ozone
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure
<b>Address</b>	755 Stanislaus St., Maricopa, CA 93252
<b>GPS Coordinates (decimal degrees)</b>	35.0515 N, -119.4026 W
<b>Distance to roadways (meters)</b>	500 (northwest)
<b>Traffic Count/Year</b>	255/2016 (Traffic count for nearest roads: Union St. at California St., Source: Kern Council of Governments.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Gravel, dirt, vegetative

Maricopa (1)		
Pollutant	Ozone	Meteorology
Parameter code	44201	Many
Spatial scale	N	N
Site type	HC, RT	GB
Basic monitoring objective(s)	NC, RS, TP	RS, TP
Monitor type	SLAMS	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None
FRM/FEM/ARM/Other	FEM	Other
POC	1	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N/A	N/A
Instrument manufacturer and model	Teledyne 400E	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS-Met One 010C
Analysis method	UV	Many
Method code	087	Many
Monitoring start date (MM/DD/YYYY)	07/01/87	07/01/87
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 – 12/31	01/01 – 12/31
Probe height (meters)	3.0m	10m
Distance from supporting structure (meters)	1.0m	N/A
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	3m H 0.5m V	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	17m H 1m V	N/A
Distance from trees (meters)	18m H 8m V	20m
Distance to furnace or incinerator flue (meters)	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	350	360

Pollutant	Ozone	Meteorology
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	Pyrex & Teflon	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	7.34	N/A
Frequency of one-point QC check for gaseous instruments	Daily	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	N/A	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	10/10/16	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A
Changes planned within the next 18 months (Y/N)	N	N

<b>Site Name</b>	<b>Lebec</b>
<b>AQS ID (XX-XXX-XXXX)</b>	06-029-2009
<b>Representative statistical area Name (i.e. MSA, CBSA, other)</b>	Bakersfield
<b>County</b>	Kern
<b>Collecting (Operating) Agency</b>	SJVAPCD
<b>Analytical Lab (i.e. weigh lab, toxics lab, other)</b>	N/A
<b>Reporting Agency</b>	SJVAPCD
<b>Site Start Date</b>	1/20/2009
<b>Pollutant Parameters</b>	PM2.5 Non-FEM
<b>Meteorological Parameters</b>	Wind speed, wind direction, outdoor temperature, barometric pressure
<b>Address</b>	1277 Beartrap Road, Lebec, CA 93243
<b>GPS Coordinates (decimal degrees)</b>	34.8415N, -118.8610W
<b>Distance to roadways (meters)</b>	300 m (west)
<b>Traffic Count/Year</b>	1,967/2016 (Traffic count for nearest roads: Lebec Rd and Interstate 5, Source: Kern Council of Governments.)
<b>Groundcover (e.g. paved, vegetative, dirt, sand, gravel)</b>	Gravel, vegetative

Lebec		
Pollutant	PM2.5	Meteorology
Parameter code	88502	Many
Spatial scale	N	R
Site type	PE	GB
Basic monitoring objective(s)	TP	RS, TP
Monitor type	SPM	Other
Network affiliation(s), if applicable (a monitor may have none, one, or multiple)	None	None
FRM/FEM/ARM/Other	Non-FEM	Other
POC	3	1
Primary / QA Collocated / Other (provide for all PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>10-2.5</sub> , Pb and NO <sub>2</sub> monitors. Non-PM, Pb, NO <sub>2</sub> monitors should be listed as "N/A".)	Primary	Other
Is it suitable for comparison against the annual PM <sub>2.5</sub> ? (Y/N)	N	N/A
Instrument manufacturer and model	MET One BAM 1020	ITP- Hy-Cal 512AA3B, OT- Met One 060A-2, BP- Met One 092, WD- Met One 020C, WS-Met One 010C
Analysis method	Beta Attenuation	Many
Method code	731	Many
Monitoring start date (MM/DD/YYYY)	01/27/09	OT, WS, WD - 12/09/09; BP – 01/28/10
Required sampling frequency (e.g. 1:3 excluding exceptional events/1:1 including exceptional events)	Hourly	Hourly
Sampling season (MM/DD - MM/DD)	01/01 -12/31	01/01 – 12/31
Probe height (meters)	1.98	10
Distance from supporting structure (meters)	4.62	N/A
Distance from obstructions on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A
Distance from obstructions not on roof. Include horizontal distance + vertical height above probe for obstructions nearby. (meters)	N/A	N/A
Distance from trees (meters)	200m	200m
Distance to furnace or incinerator flue (meters)	N/A	N/A
Distance between monitors fulfilling a QA collocation requirement (meters).	N/A	N/A
Unrestricted airflow (degrees around probe/inlet or percentage of monitoring path)	360	360



Pollutant	PM2.5	Meteorology
Probe material for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A
Residence time for reactive gases NO/NO <sub>2</sub> /NO <sub>y</sub> , SO <sub>2</sub> , O <sub>3</sub> ; PAMS: VOCs, Carbonyls (seconds)	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A
Frequency of flow rate verification for manual PM samplers, including Pb samplers (routine checks)	N/A	N/A
Frequency of flow rate verification for automated PM analyzers (routine checks)	Monthly	N/A
For low volume PM instruments (flow rate < 200 liters/minute), is any PM instrument within 1 m of the lovol? If yes, please list distance (meters) and instrument(s).	No	N/A
For high volume PM instrument (flow rate > 200 liters/minute), is any PM instrument within 2m of the hivol? If yes, please list distance (meters) and instrument(s).	N/A	N/A
Date of Annual Performance Evaluation conducted in the past calendar year for gaseous parameters (MM/DD/YYYY)	N/A	N/A
Date of two semi-annual flow rate audits conducted in the past calendar year for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	04/07/16, 10/25/16	N/A
Changes planned within the next 18 months (Y/N)	N	N

## **APPENDIX C:**

### **San Joaquin Valley Air Pollution Control District Notice of Public Inspection Period on the 2017 Air Monitoring Network Plan**

This page intentionally blank

**SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT  
NOTICE OF PUBLIC INSPECTION PERIOD ON THE  
DRAFT 2017 AIR MONITORING NETWORK PLAN**

NOTICE IS HEREBY GIVEN that a 30-day public inspection period is being held on the San Joaquin Valley Air Pollution Control District's (District) Draft 2017 Air Monitoring Network Plan.

Interested persons may submit comments to:

Jennifer Ridgway  
San Joaquin Valley Unified Air Pollution Control District  
1990 East Gettysburg Avenue  
Fresno, CA 93726  
Email: [jennifer.ridgway@valleyair.org](mailto:jennifer.ridgway@valleyair.org)

The public inspection period begins May 23, 2017 and will end June 21, 2017.

Copies of the Draft 2017 Air Monitoring Network Plan can be obtained by calling (559) 230-6100. You may download a copy of the Draft 2017 Air Monitoring Network Plan from the District's website on or after May 23, 2017 under the Other Notices portion of the Public Notices page:

[http://www.valleyair.org/notices/public\\_notices\\_idx.htm#Other Notices](http://www.valleyair.org/notices/public_notices_idx.htm#Other Notices)

For additional information, contact Jennifer Ridgway by phone at (559) 230-6100.

**APPENDIX D:**  
**Comments and Responses**

This page intentionally blank

## **Appendix D: Comments and Responses**

The District received no public comments on the 2017 Air Monitoring Network Plan.