Webinar Series on the Hazardous Waste Generator Improvements Rule

US EPA
Office of Resource Conservation and Recovery
2019

Module 1: Goals and Background of the Generator Improvements Rule

Contents of Module 1


- Purpose of this Training
- Background
- History of the Rule
- Generator Universe
- Goals of the Final Rule
- Reorganization of the Generator Regulations
- New Definitions
- Revisions to § 262.10


Purpose of this Training

- Spread awareness of this new rule to the states and regulated community
- Describe and explain in more detail the rule's provisions and how this rule may potentially affect generators and states implementing the rule
- Obtain feedback and answer questions from participants about the rule and how it will work
- Discuss what types of training and outreach materials would be most useful for EPA to develop to assist in implementing this rule

• Resource Conservation and Recovery Act (RCRA) was enacted by Congress in 1976 and regulates the management of solid waste (e.g., garbage), hazardous waste, and underground storage tanks holding petroleum or certain other chemicals.

- RCRA Program Goals
 - To protect human health and the environment from the potential hazards of waste disposal.
 - To conserve energy and natural resources.
 - To reduce the amount of waste generated.
- Statutory Authority for Generator Improvements Rule: Sections 2002, 3001, 3002, 3003, 3004, 3007, 3010 of the Solid Waste Disposal Act of 1965, as amended by the Resource Conservation and Recovery Act of 1976, as amended by the Hazardous and Solid Waste Amendments of 1984, 42 U.S.C. 6921, 6922, 6923, 6924.

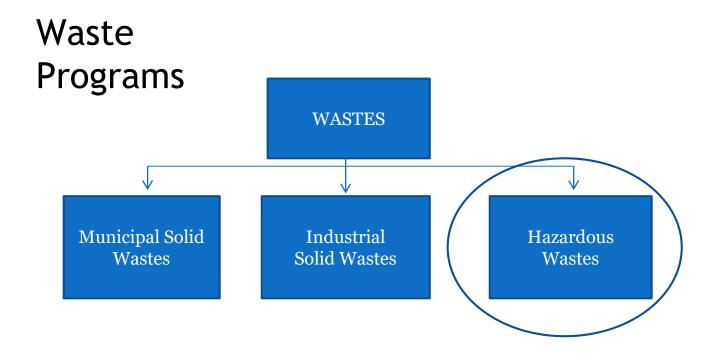

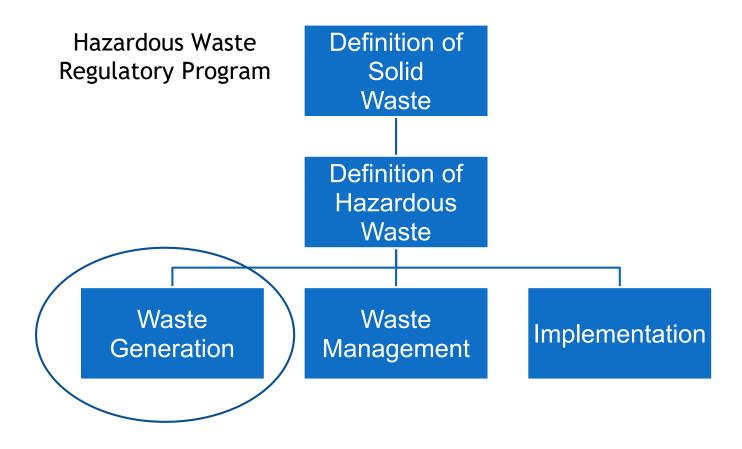

- Waste Generation
- Different levels of regulation for facilities that generate different volumes of hazardous waste on a monthly basis
 - Three categories of Generators:
 - Very small quantity generators (VSQGs) renamed in this rule (previously called "conditionally exempt small quantity generators (CESQGs)")
 - Small quantity generators (SQGs)
 - Large quantity generators (LQGs)

To determine your generator category, count all waste generated <u>in a calendar month:</u>

| Very Small Quantity Generator (VSQG) | Small Quantity Generator (SQG) | Large Quantity Generator (LQG) |
|--|--|---|
| 1/ D | - | - |
| ½ Drum or 27 Gal. Or 220 lbs. Or ≤ 100 Kg | ½ to 5 Drums or 27-275 Gal. Or 220-2200 lbs. Or 100-1000 Kg. | >5 Drums or >275 Gal. or >2200 lbs. or ≥1000 Kg. |

Key: 55 Gallon Drum = 440 lbs. = 200 Kg.

History of the Rule

- Most of the generator rules were promulgated in the 1980s and are over thirty years old
- In 2004, ORCR conducted an evaluation of the generator program to improve program effectiveness, reduce compliance costs, and foster an improved relationship with states and the regulated community, published an ANPRM (April 22, 2004, 69 FR 21800) and held four public meetings soliciting comment on the effectiveness of the generator program
 - Comments received included: simplify the regulations, eliminate cross-referencing, codify guidance, provide flexibility for episodic generators, require re-notification for SQGs, provide one-pager basic information for contingency planning, clarify ambiguities, clarify concepts in satellite accumulation, and more

History of the Rule

- After 2004, ORCR took a number of non-regulatory actions to respond to public comments and to improve the generator program:
 - Improved user-friendliness of generator website
 - Developed online guide to the "Hazardous Waste Generator Regulations"
 - Released "Closed Container" guidance
 - Issued memo for turnover of hazardous waste in tanks
 - Issued a Technical Corrections (direct final) rule
- We also engaged in further program evaluation
 - 2013 Hazardous Waste Determination Program Evaluation
 - 2014 Retail NODA OMB Retrospective Review
- However, EPA determined that many of the existing issues with the generator regulations could only be resolved through rulemaking.
- The September 25, 2015, proposed rule grew out of all of these evaluations and presented more than 60 proposed changes to the generator regulations, plus technical corrections, for public comment.

History of the Rule

- Over 230 public comments were received on the Generator Improvements Proposed Rule
- The commenters included:
 - 25 states
 - 10 local governments
 - More than 50 from academic institutions
 - About a dozen from the energy sector/utilities
 - More than 25 from industry and related trade associations
 - 10 from the waste management industry
- Comments covered all aspects of the rule, particularly waste determinations and marking and labeling; independent requirements and conditions for exclusion; VSQG consolidation; and episodic generation

Generator Universe

| Generator Category | Number of Facilities | Total Hazardous Waste Generated (tons) | Percent of Total Hazardous Waste Generated |
|-----------------------|-----------------------------|--|--|
| VSQGs | 353,400 – 591,800 | 46,000-148,000 | <1% |
| SQGs | 49,900-64,300 | 66,000-141,000 | <1% |
| LQGs | 20,800 | 35.2 million | 99% |
| Total | 424,100– 676,900 | 35.3–35.4 million | 100% |

^{*} Numbers of VSQGs and SQGs are estimates based on Biennial Report (BR) and limited state data. LQG number is derived from 2013 BR.

Goals of the Final Rule

The 2016 HW Generator Improvements Final Rule —

- Over 60 changes to Hazardous Waste Generator Program that:
 - Reorganizes the regulations to make them more user-friendly and thus enables improved compliance by the regulated community
 - Provides greater flexibility for hazardous waste generators to manage waste in a cost-effective manner through episodic generation and VSQG-LQG consolidation provisions
 - Strengthens environmental protection by addressing identified gaps in the regulations
 - Clarifies certain components of the hazardous waste generator program to address ambiguities and foster improved compliance

Reorganization of Generator Regulations

| Provision | Previous Citation | New Citation |
|---|--------------------------------|--------------|
| Generator Category Determination | § 261.5(c)–(e) | § 262.13 |
| VSQG Provisions | § 261.5(a), (b), (f)–(g) | § 262.14 |
| Satellite Accumulation Area Provisions | § 262.34(c) | § 262.15 |
| SQG Provisions | § 262.34(d)–(f) | § 262.16 |
| LQG Provisions | § 262.34(a), (b), (g)–(i), (m) | § 262.17 |

As part of this reorganization, the Agency made conforming changes to citations that reference § 261.5 and § 262.34

Note: See Crosswalk Handout for more details about reorganization.

Definitions of Terms

§ 260.10

- Acute hazardous waste/ Non-acute hazardous waste
- Central accumulation area
- Large quantity Generator/ Small quantity generator/ Very small quantity generator

Revisions to § 262.10

- § 262.10(a)-(l) has been revised in a variety of ways to clarify the structure of the regulations and remove obsolete provisions.
- Obsolete provisions being removed are—
 - § 262.10(c)—outdated provision from the early days of RCRA when the regulations distinguished between generators that shipped off-site for management and those that were also RCRA-designated facilities
 - § 262.10(j)—Laboratory XL regulations
- §§ 262.10(b), (d), and (l) are updated to reflect the new structure of the regulations, but still point generators to counting requirements, import and export requirements, and regulations for academic laboratories
- §§ 262.10(e), (f), (h), & (i) are unchanged

Revisions to § 262.10

- § 262.1 contains definitions of conditions for exemption and independent requirement, used in § 262.10
- § 262.10(a)(1) lists the independent requirements for each generator category
- § 262.10(a)(2) points generators to the conditions for exemption for each generator category
- § 262.10(a)(3) states that hazardous waste must be sent to a designated facility (permitted TSDF or recycler)
- § 262.10(g) is revised to distinguish between independent requirements and conditions for exemption.

Module 2: Independent Requirements for All Generators

Contents of Module 2

- Hazardous Waste Determinations
- Counting and HW Generator Categories
- Mixtures
- Marking and Labeling

Hazardous Waste Determinations

Hazardous Waste Determinations: What Changed

What changed?

- Clarifies and emphasizes that waste determinations must be accurate!
- Confirms <u>when</u> a generator's hazardous waste determination must be made
- Elaborates on <u>how</u> to determine if a solid waste is either a listed and/or characteristic hazardous waste
- Reiterates what waste determination records must be kept
- Requires SQGs and LQGs to identify and mark RCRA waste codes on containers prior to sending hazardous waste off-site per § 262.32

Why did we make these changes?


- To improve generator compliance and therefore program success
- From different Agency analyses, generators consistently fail to make an accurate hazardous waste determination, leading to the mismanagement of hazardous waste
 - Non-compliance rates range from 10 to 30 percent
 - Reasons vary from not understanding RCRA to not even being aware of RCRA
- Making an accurate hazardous waste determination reduces the domino effect
 - Hazardous waste most likely will be managed safely from "cradle to grave"

Where It All Begins

Statutory Definition of Solid Waste - 42 U.S.C. § 6903(27)

"The term "solid waste" means any garbage, refuse, sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility and other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities, but does not include..."

Putting Things in Context

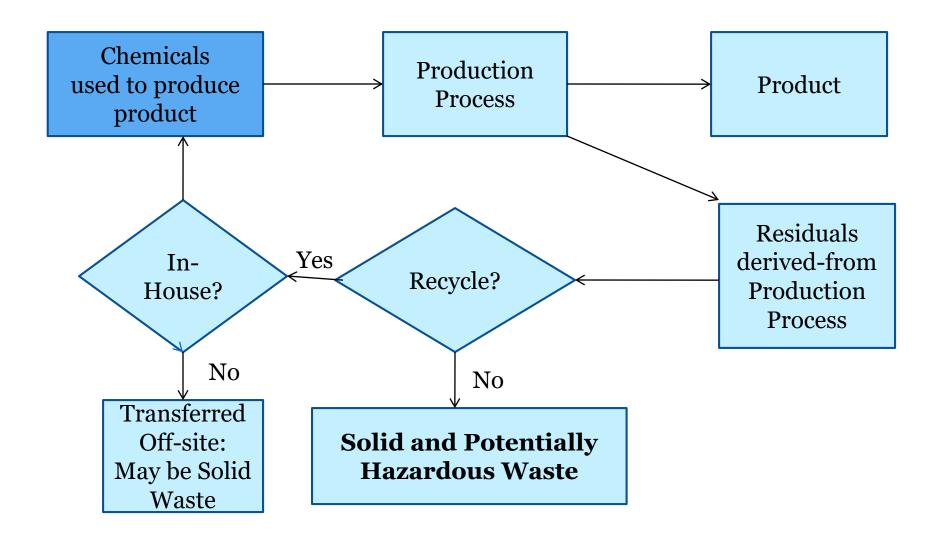

Making a Hazardous Waste Determination

- § 262.11(a) The hazardous waste determination for each solid waste must be made
 - at the point of waste generation,
 - before any dilution, mixing, or other alteration of the waste occurs,
 - and at any time in the course of its management that it has, or may have, changed its properties as a result of exposure to the environment or other factors that may change the properties of the waste such that the RCRA classification of the waste may change.

§ 262.11(a) Hazardous Waste Determination

The hazardous waste determination for each solid waste <u>must be made at the point of waste generation</u>,...

RCRA Statute is clear:

The term "hazardous waste generation" means the act or process of producing hazardous waste. See Solid Waste Disposal Act, Section 1004.

Why at the point of waste generation?

- To Ensure:
 - Proper waste identification
 - Proper handling and management from "cradle to grave"
 - Compliance with LDRs

§ 262.11(a) Hazardous Waste Determination

- The hazardous waste determination for each solid waste must be made at the point of waste generation, before any dilution, mixing, or other alteration of the waste occurs, ...
 - We added this language to make it clear that you need to characterize your waste <u>before</u> dilution, mixing or alteration
 - Alteration of waste: May change waste properties and subsequent handling
 - Example: Letting volatile organic solvents volatilize from an uncovered container

§ 262.11(a) Hazardous Waste Determination

The hazardous waste determination for each solid waste must be made at the point of waste generation, before any dilution, mixing, or other alteration of the waste occurs, and at any time in the course of its management that it has, or may have, changed its properties as a result of exposure to the environment or other factors that may change the properties of the waste such that the RCRA classification of the waste may change.

Why inclusion of this statement?

At any time in the course of its management...

- Generators need to understand the chemistry and chemical properties of their waste.
- A SW determined to be non-hazardous at the point of generation can in some cases become hazardous over time while being managed on-site through exposure to the environment (reactive wastes), settling (bi-phasic solvent waste), etc.
- Note: Opposite also true; hazardous wastes can become non-hazardous so long as not diluted or non-LDR compliance treatment
- Does this mean you need to monitor your waste 24/7?

Hazardous Waste Determinations (continued)

- Generators may also take conservative approach and manage non-HW as HW if they so choose
- For waste where they are awaiting test results, the generator needs to manage as HW until they get confirmation
 - If it's not HW, they can simply remove the labels and manage as non-hazardous solid waste

§262.11(b) A person must determine whether the solid waste is excluded from regulation under 40 CFR 261.4

- 40 CFR 261.4 has three sections that exclude or exempt certain secondary materials from being either a SW or HW*
 - 40 CFR 261.4(a) identifies secondary materials that are not SW
 - 40 CFR 261.4(b) identifies SW but are not HW
 - 40 CFR 261.4(c) identifies HW which are exempted from certain regulations until the HW exits the unit(s) in which it was generated


*This language has not changed

§262.11(c) Have You Generated a Listed Hazardous Waste?

- If the waste is not excluded under 40 CFR 261.4, the person **must then use knowledge** of the waste to determine if the waste meets any of the listing descriptions under subpart D of 40 CFR part 261.
- Acceptable generator knowledge that may be used in making an accurate determination as to whether the waste is listed may include:
 - waste origin
 - composition
 - the process producing the waste
 - feedstock, and
 - other reliable and relevant information; **e.g.**, **the regulatory language of the listing**, **the regulatory intent of the original listing** (as evidenced by Federal Register notices, background documents, etc.)
- If the waste is listed, the person may file a delisting petition under 40 CFR 260.20 and 260.22 to demonstrate to the Administrator that the waste from this particular site or operation is not a hazardous waste.

§262.11(d): Have you generated a characteristically hazardous waste?

• There are four hazardous waste characteristics

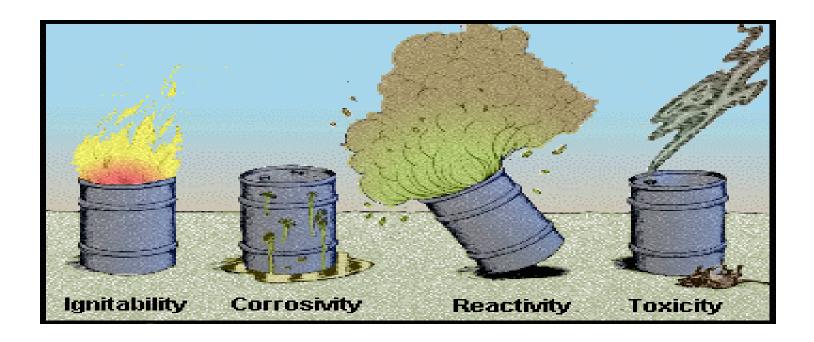

§262.11(d): Have you generated a characteristically hazardous waste?

- The person then must also determine whether the waste exhibits one or more hazardous characteristics as identified in subpart C of 40 CFR part 261 by following the procedures in paragraph (d)(1) or (2) of this section or a combination of both.
- (1) The person must apply knowledge of the hazard characteristic of the waste in light of the materials or the processes used to generate the waste.

Have you generated a characteristically hazardous waste (cont.)?

- Acceptable knowledge may include:
 - process knowledge (e.g., information about chemical feedstocks and other inputs to the production process);
 - knowledge of products, by-products, and intermediates produced by the manufacturing process;
 - chemical or physical characterization of wastes;
 - information on the chemical and physical properties of the chemicals used or produced by the process or otherwise contained in the waste;
 - testing that illustrates the properties of the waste; or other reliable and relevant information about the properties of the waste or its constituents.
 - A test other than a test method set forth in subpart C of 40 CFR part 261, or an equivalent test method approved by the Administrator under 40 CFR 260.21, may be used as part of a person's knowledge to determine whether a solid waste exhibits a characteristic of hazardous waste.

Using "Tests" as part of "Knowledge" for Making a Characteristic HW Determination

- The results of <u>non-regulatory</u> tests may also provide relevant information:
 - Total concentration in the waste may show the waste is not TC hazardous
 - Tests that evaluate properties similar to the characteristic may be relevant,
 even if they do not define the waste as hazardous by themselves.
 - SW-846 includes several guidance tests, including method 1040 for oxidizers, and others.

Have you generated a characteristically hazardous waste (cont.)?

- (2) When available knowledge is inadequate to make an accurate determination, the person must test the waste according to the applicable methods set forth in subpart C of 40 CFR part 261 or according to an equivalent method approved by the Administrator under 40 CFR 260.21 and in accordance with the following:
 - (i) Persons testing their waste must <u>obtain a representative sample of the waste for the testing</u>, as defined at 40 CFR 260.10.
 - (ii) Where a test method is specified in subpart C of 40 CFR part 261, the results of the regulatory test, when properly performed, <u>are definitive for determining the regulatory status of the waste.</u>

Remember: A Hazardous Characteristic Determination Must be Made Regardless of Listing Status

- Even if the waste <u>is listed</u>, the generator must still determine if the waste exhibits a characteristic in order to comply with land disposal restrictions (LDR) in 40 CFR Part 268
 - Need the full list of applicable waste codes to identify all necessary treatment

Note: Under 268.9(b), the treatment standard for the listed code will operate in lieu of the standard for the characteristic (if the constituent causing the characteristic has a treatment standard via the listed code).

§262.11(e): You've determined you have generated a hazardous waste

• (e) If the waste is determined to be hazardous, the generator must refer to parts 261, 264, 265, 266, 267, 268, and 273 of this chapter for other possible exclusions or restrictions pertaining to management of the specific waste.*

*This language has not changed

§262.11(f): Recordkeeping*

- A small or large quantity generator must maintain records supporting its hazardous waste determinations, including records that identify whether a solid waste is a hazardous waste, as defined by 40 CFR 261.3.
- Records must be maintained for at least three years from the date that the waste was last sent to on-site or off-site treatment, storage, or disposal.
- The records must include, but are not limited to, the following types of information:
 - the results of any tests, sampling, waste analyses, or other determinations made in accordance with this section;
 - records documenting the tests, sampling, and analytical methods used to demonstrate the validity and relevance of such tests;
 - records consulted in order to determine the process by which the waste was generated, the composition of the waste, and the properties of the waste; and
 - records which explain the knowledge basis for the generator's determination, as described at 40 CFR 262.11(d)(1).

^{*}Basic recordkeeping requirement copied from existing 262.40

§262.11(g): RCRA Waste Codes

• If the waste is determined to be hazardous, small quantity generators and large quantity generators must identify all applicable EPA hazardous waste numbers (EPA hazardous waste codes) in subparts C and D of part 261. Prior to shipping the waste off site, the generator also must mark its containers with all applicable EPA hazardous waste numbers (EPA hazardous waste codes) or use electronic means (such as bar coding) according to § 262.32.

Comparison of New vs. Old §262.11

| New | Old |
|---|---|
| A person who generates a solid waste, as defined in 40 CFR 261.2 , must make an accurate determination as to whether that waste is a hazardous waste | A person who generates a solid waste, as defined in 40 CFR 261.2 , must determine if that waste is a hazardous waste using the following method: |
| (a) The hazardous waste determination for each solid waste must be made at the point of waste generation, before any dilution, mixing, or other alteration of the waste occurs, and at any time in the course of its managementthat may change the properties of the waste such that the RCRA classification of the waste may change. | |
| (b) A person must determine whether the solid waste is excluded from regulation under 40 CFR 261.4. | (a) He should first determine if the waste is excluded from regulation under 40 CFR 261.4. |
| (c) If the waste is not excluded under 40 CFR 261.4, the person must then use knowledge of the waste to determine if the waste meets any of the listing descriptions under subpart D of 40 CFR part 261. | (b) He must then determine if the waste is listed as a hazardous waste in subpart D of 40 CFR part 261. |

Comparison of New vs. Old §262.11

| NEW | OLD |
|--|-----|
| (c) Continued | |
| Acceptable knowledge that may be used in making an | |
| accurate determination as to whether the waste is | |
| listed may include waste origin, composition, the | |
| process producing the waste, feedstock, and other | |
| reliable and | |
| relevant information. If the waste is listed, the person | |
| may file a delisting petition under 40 CFR 260.20 and | |
| 260.22 to demonstrate to the Administrator that the | |
| waste from this particular site or operation is not a | |
| hazardous waste. | |

Comparison of New vs. Old §262.11 (cont.)

| New | Old |
|---|---|
| (d) The person then must also determine whether the waste exhibits one or more hazardous characteristics as identified in subpart C of 40 CFR part 261 by following the procedures in paragraph (d)(1) or (2) of this section, or a combination of both. (1) The person must apply knowledge of the hazard characteristic of the waste in light of the materials or the processes used to generate the waste. Acceptable knowledge may include | (c) For purposes of compliance with 40 CFR part 268, or if the waste is not listed in subpart D of 40 CFR part 261, the generator must then determine whether the waste is identified in subpart C of 40 CFR part 261 by either: (1) Testing the waste according to the methods set forth in subpart C of 40 CFR part 261, or according to an equivalent method approved by the Administrator under 40 CFR 260.21; or (2) Applying knowledge of the hazard characteristic of the waste in light of the materials or the processes used. |

Comparison of New vs. Old §262.11 (cont.)

| NEW | OLD |
|---|---|
| (e) If the waste is determined to be hazardous, the generator must refer to parts 261, 264, 265, 266, 267, 268, and 273 of this chapter for other possible exclusions or restrictions pertaining to management of the specific waste. | (d) If the waste is determined to be hazardous, the generator must refer to parts 261, 264, 265, 266, 267, 268, and 273 of this chapter for possible exclusions or restrictions pertaining to management of the specific waste. |
| (f) Recordkeeping for small and large quantity generators. | |
| (g) Identifying hazardous waste numbers for small and large quantity generators. | |

Counting and Hazardous Waste Generator Categories

Determining Generator Category and Hazardous Waste Counting (§ 262.13)

- A hazardous waste generator has always had to know what category of generator it is (VSQG, SQG, or LQG).
- The regulations did not previously present requirements about determining generator categories in a clear and succinct way.
- New § 262.13 clarifies the process for a generator to determine its generator category each calendar month for generators of acute hazardous waste, generators of non-acute hazardous waste, and generators that mix acute and non-acute hazardous wastes.
 - "Acute" hazardous waste and "non-acute" hazardous waste
- This provision also discusses how mixing of hazardous waste with non-hazardous waste impacts generator category.

Hazardous Waste Counting

- Introductory language of § 262.13
 - A generator must determine its generator category
 - The category is based on the amount of hazardous waste that is generated in a calendar month.
 - A generator's category can change from month to month.
 - The counting requirements are based on the RCRA statute & are critical to the framework of the generator regulations

Hazardous Waste Counting

- 262.13 (a): Basic procedures for determining generator category if generating only non-acute hazardous waste or only acute hazardous waste
- 262.13(b): Procedures for determining generator category if generating a combination of acute and non-acute hazardous waste
- 262.13 (c) & (d): Those materials that do not need to be included when counting hazardous waste
 - Previous provisions moved from 261.5 (c) & (d) + hazardous waste from an episodic event
- 262.13 (e): Statement that a generator uses its determined category to identify which regulations apply

Generating Acute and Non-Acute Hazardous Waste in the Same Month

- Before the final generator rule, EPA had issued contradictory guidance documents on whether a generator could be one category of generator for acute waste and another for non-acute waste in the same month.
- The Generator final rule provisions make it clear that acute hazardous waste, non-acute hazardous waste, and residues of clean ups of hazardous waste are all considered in making a generator's monthly category determination.

Hazardous Waste Counting

TABLE 1 to § 262.13—Generator Categories Based on Quantity of Waste Generated in a Calendar Month

| Quantity of acute hazardous waste generated in a calendar month | Quantity of non-acute hazardous waste generated in a calendar month | Quantity of residues from a cleanup of acute hazardous waste generated in a calendar month | Generator Category |
|--|---|--|-------------------------------|
| > 1 kg | Any amount | Any amount | Large quantity generator |
| Any amount | ≥ 1,000 kg | Any amount | Large quantity generator |
| Any amount | Any amount | > 100 kg | Large quantity generator |
| ≤ 1 kg | > 100 kg and < 1,000 kg | ≤ 100 kg | Small quantity generator |
| ≤ 1 kg | ≤ 100 kg | ≤ 100 kg | Very small quantity generator |

Comparison of Old § 261.5 vs. New § 262.13

| New | Old |
|---|-----|
| 262.13 Introductory Text A generator must determine its generator category. A generator's category is based on the amount of hazardous waste generated each month and may change from month to month. This section sets forth procedures to determine whether a generator is a very small quantity generator, a small quantity generator, or a large quantity generator for a particular month, as defined in § 260.10 of this chapter. | |
| 262.13 (a) & (b) (a) Generators of either acute hazardous waste or non-acute hazardous waste. A generator who either generates acute hazardous waste or non-acute hazardous waste in a calendar month shall determine its generator category for that month by doing the following: (1) Counting the total amount of hazardous waste generated in the calendar month; (2) Subtracting from the total any amounts of waste exempt from counting as described in paragraphs (c) and (d) of this section; and (3) Determining the resulting generator category for the hazardous waste generated using Table 1 of this section. (b) Generators of both acute and non-acute hazardous wastes. A generator who generates both acute hazardous waste and non-acute hazardous waste in the same calendar month shall determine its generator category for that month by doing the following: (1) Counting separately the total amount of acute hazardous waste and the total amount of non-acute hazardous waste generated in the calendar month; (2) Subtracting from each total any amounts of waste exempt from counting as described in paragraphs (c) and (d) of this section; (3) Determining separately the resulting generator categories for the quantities of acute and non-acute hazardous waste generated using Table 1 of this section; and (4) Comparing the resulting generator categories from paragraph (b)(3) of this section and applying the more stringent generator category to the accumulation and management of both non-acute hazardous waste and acute hazardous waste generated for that month. | |

Comparison of Old § 261.5 vs. New § 262.13

| New | Old |
|---|---|
| (c) When making the monthly quantity-based determinations required by this part, the generator must include all hazardous waste that it generates, except hazardous waste that: (1) Is exempt from regulation under 40 CFR 261.4(c) through (f), 261.6(a)(3), 261.7(a)(1), or 261.8; (2) Is managed immediately upon generation only in on-site elementary neutralization units, wastewater treatment units, or totally enclosed treatment facilities as defined in 40 CFR 260.10; (3) Is recycled, without prior storage or accumulation, only in an on-site process subject to regulation under 40 CFR 261.6(c)(2); (4) Is used oil managed under the requirements of 40 CFR 261.6(a)(4) and 40 CFR part 279; (5) Is spent lead-acid batteries managed under the requirements of 40 CFR part 266 subpart G; (6) Is universal waste managed under 40 CFR 261.9 and 40 CFR part 273; (7) Is a hazardous waste that is an unused commercial chemical product (listed in 40 CFR part 261 subpart D or exhibiting one or more characteristics in 40 CFR part 261 subpart C) that is generated solely as a result of a laboratory clean-out conducted at an eligible academic entity pursuant to § 262.213. For purposes of this provision, the term eligible academic entity shall have the meaning as defined in § 262.200; or (8) Is managed as part of an episodic event in compliance with the conditions of subpart L of this part. | 261.5(c) (c) When making the quantity determinations of this part and 40 CFR part 262, the generator must include all hazardous waste that it generates, except hazardous waste that: (1) Is exempt from regulation under 40 CFR 261.4(c) through (f), 261.6(a)(3), 261.7(a)(1), or 261.8; θΨ (2) Is managed immediately upon generation only in on-site elementary neutralization units, wastewater treatment units, or totally enclosed treatment facilities as defined in 40 CFR 260.10; θΨ (3) Is recycled, without prior storage or accumulation, only in an on-site process subject to regulation under 40 CFR 261.6(c)(2); θΨ (4) Is used oil managed under the requirements of 40 CFR 261.6(a)(4) and 40 CFR part 279; θΨ (5) Is spent lead-acid batteries managed under the requirements of 40 CFR part 266, subpart G; θΨ (6) Is universal waste managed under 40 CFR 261.9 and 40 CFR part 273; (7) Is a hazardous waste that is an unused commercial chemical product (listed in 40 CFR part 261, subpart D or exhibiting one or more characteristics in 40 CFR part 261, subpart C) that is generated solely as a result of a laboratory clean-out conducted at an eligible academic entity pursuant to §262.213. For purposes of this provision, the term eligible academic entity shall have the meaning as defined in §262.200 of Part 262. |

Comparison of Old § 261.5 vs. New § 262.13

| New | Old |
|---|---|
| 262.13(d) (d) In determining the quantity of hazardous waste generated in a calendar month, a generator need not include: (1) Hazardous waste when it is removed from on-site accumulation, so long as the hazardous waste was previously counted once; (2) Hazardous waste generated by on-site treatment (including reclamation) of the generator's hazardous waste, so long as the hazardous waste that is treated was previously counted once; and (3) Hazardous waste spent materials that are generated, reclaimed, and subsequently reused on site, so long as such spent materials have been previously counted once. | 261.5(d) (d) In determining the quantity of hazardous waste generated, a generator need not include: (1) Hazardous waste when it is removed from on-site storage; or (2) Hazardous waste produced by on-site treatment (including reclamation) of his hazardous waste, so long as the hazardous waste that is treated was counted once; or (3) Spent materials that are generated, reclaimed, and subsequently reused onsite, so long as such spent materials have been counted once. |
| 262.13 (e) (e) Based on the generator category as determined under this section, the generator must meet the applicable independent requirements listed in § 262.10. A generator's category also determines which of the provisions of §§ 262.14, 262.15, 262.16 or 262.17 must be met to obtain an exemption from the storage facility permit, interim status, and operating requirements when accumulating hazardous waste. | |

Mixing

Mixing Solid Waste with Hazardous Waste - What changed?

- Reorganization distinguished VSQGs mixing requirements from those for SQGs and LQGs
- Clarified VSQGs mixing solid waste with hazardous wastes and generating characteristic waste must count that waste towards their generator category for that month
- Made clear that SQGs and LQGs mixing solid wastes with hazardous wastes are subject to certain restrictions and requirements.

VSQGs Mixing Solid Waste with Hazardous Waste

- Clarifies that a VSQG mixing hazardous waste with solid waste can remain subject to VSQG requirements (i.e., § 262.14), even though the mixture may exceed the VSQG quantity limits (either 100 kg per month generated or 1,000 kg accumulated on site at any one time) as long as the mixture does not exhibits one or more of the characteristics of a hazardous waste.
- If the resultant mixture does exhibit a hazardous waste characteristic, the mixture is a newly generated hazardous waste.
 - The VSQG must add the quantity from the resulting mixture with any other regulated hazardous waste generated in the calendar month and determine whether the total quantity generated exceeds the generator calendar month quantity identified in the definition of generator categories found in 40 CFR 260.10.

SQGs and LQGs Mixing Solid Waste with Hazardous Waste

- Mixtures of hazardous waste and solid waste at SQGs and LQGs are subject to:
 - The mixture rule in §§ 261.3(a)(2)(iv), (b)(2) and (3), and (g)(2)(i);
 - The prohibition of dilution rule at § 268.3(a);
 - The land disposal restriction requirements of § 268.40 if a characteristic hazardous waste is mixed with a solid waste so that it no longer exhibits the hazardous characteristic; and
 - The hazardous waste determination requirement at § 262.11.

Mixing vs Dilution

- Generators can't dilute their hazardous wastes unless it provides a useful and effective contribution (i.e., possess a unique property to remove the hazardous characteristic from the hazardous waste instead of merely diluting it).
- The prohibition of dilution rule at § 268.3(a) reads:
 - Except as provided in paragraph (b) of this section, no generator, transporter, handler, or owner or operator of a treatment, storage, or disposal facility shall in any way dilute a restricted waste or the residual from treatment of a restricted waste as a substitute for adequate treatment to achieve compliance with subpart D of this part, to circumvent the effective date of a prohibition in subpart C of this part, to otherwise avoid a prohibition in subpart C of this part, or to circumvent a land disposal prohibition imposed by RCRA section 3004.

Mixing: Why the Changes?

- Changes are designed to clarify the language that was found at §§ 261.5(h) and (i) which addressed the mixing of hazardous waste and nonhazardous waste by a VSQG and the implications to its generator category if the mixture is determined to be a hazardous waste.
- The language specifically addressed how the regulations apply when VSQG hazardous waste is mixed with nonhazardous solid waste and the resulting combination exceeds the VSQG quantity limits.
- The previous §§ 261.5(h) and (i) had not evolved with the changes to the SQG and CESQG regulations through the years, leaving ambiguities.
- The previous regulations also did not specifically discuss SQGs and LQGs mixing solid wastes with hazardous wastes in the generator provisions.


- Marking and labeling requirements apply throughout the hazardous waste management regulations.
- Final Rule: What changed?
 - Containers and tanks labels must have the words "Hazardous Waste" and also indicate the hazards of the contents of the accumulation units
 - For containment buildings, the generator must have a sign in a conspicuous place with the words, "Hazardous Waste" and the hazards of the waste
- Added the hazards to improve risk communication for workers, waste handlers, emergency responders, and visitors
- Flexibility in how to comply with this new provision; can indicate the hazards of the contents of the accumulation unit using any of several established methods (e.g., DOT hazard communication, OSHA hazard statement or pictogram, NFPA chemical hazard label, or RCRA characteristic)

• The applicable hazardous waste characteristic (i.e., ignitable, corrosive, reactive, toxic)







• Hazard communication consistent with DOT (49 CFR part 172 subpart E – labeling or subpart F – placarding)

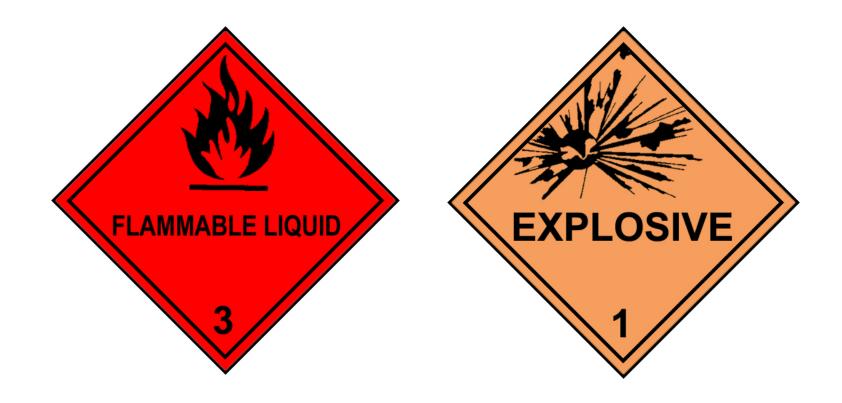

• Hazard statement or pictogram consistent with OSHA (29 CFR 1910.1200)

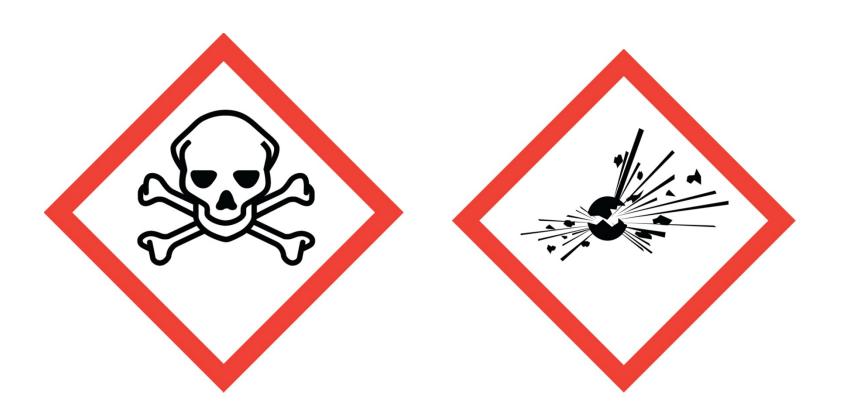


• Chemical hazard label consistent with the National Fire Protection Association code 704

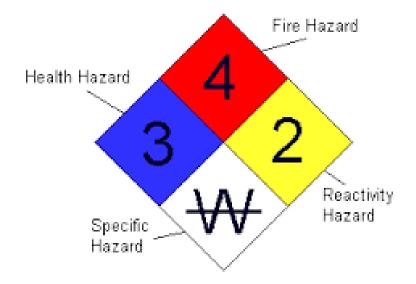

- EPA is providing flexibility on how to indicate the hazards of the contents of the containers
- Some clarifications:
 - Labeling should occur at the initial point of generation
 - For containers that have small containers inside (e.g., tubes, vials, etc.), generators can mark the outer/secondary container or attach a tag with the required information
 - For wastes that are in a container that already has appropriate marking and labeling (e.g., a commercial chemical product (CCP) in its original container with an intact label), the existing marking and labeling is sufficient, provided it indicates the hazards of the chemical
 - In that case, the generator would just add the words "Hazardous Waste"

- Per §262.32, Generators must add the RCRA waste codes before shipping waste off-site
 - This allows receiving TSDFs to know how to treat the wastes to meet land disposal restriction requirements
 - Generators must mark their containers with the applicable RCRA waste codes or use a barcoding system that performs the same function

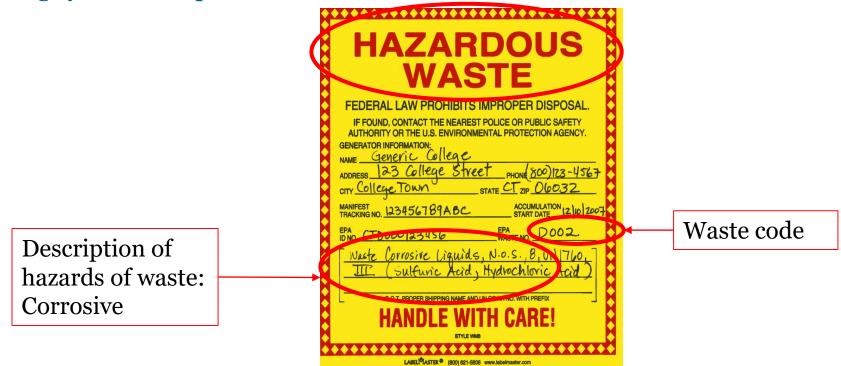

- Areas affected by the new Marking and Labeling standards include:
 - Generator satellite accumulation areas and central accumulation areas
 - Transfer facilities consolidating hazardous wastes from different generators
 - Generator container and tank storage areas at TSDFs
- Did not change the accumulation start date for central accumulation areas

Module 3: Revisions that Apply to Very Small Quantity Generators

Contents of Module 3

- VSQGs
- Episodic Generation
- VSQG Consolidation

Very Small Quantity Generators (VSQG)

- Limited Requirements under both the previous regulations and the new final rule
 - Same basic standards but they are now located in § 262.14
- The new final rule provides new options for flexibility for VSQGs
 - Episodic Generation
 - Consolidation at an LQG under the same company

Episodic Generation





Episodic Generation

- Previous RCRA rules lacked flexibility to address an "episodic" change in a generator's regulatory category:
 - Planned event (i.e., periodic maintenance such as tank cleanouts)
 - Unplanned event (i.e., production upset conditions, spill, acts of nature)
- Generators had to comply with a more comprehensive set of regulations for short period of time when they were not regular generators of higher levels of hazardous waste.

- Applicable to VSQGs and SQGs.
- New part 262 subpart L allows generators that temporarily change their generator category as a result of an episodic event to operate under streamlined regulations.
- All hazardous waste from episodic events must be shipped by hazardous waste transporter with a hazardous waste manifest to a RCRA-designated facility (TSDF or recycler).

Where do I find the Episodic Generation Regulations?

- § 262.13(c)(8) states that hazardous waste managed as part of an episodic event does not have to be counted toward a generator's category
- Part 262 subpart L (§§ 262.230-262.233) contains the conditions for the episodic generation provision.

What is an Episodic Event?

- Episodic event means an activity or activities, either planned or unplanned, that does not normally occur during generator operations, resulting in an increase in the generation of hazardous wastes that exceeds the calendar month quantity limits for the generator's usual category.
- *Planned episodic event* means an episodic event that the generator planned and prepared for, including regular maintenance, tank cleanouts, short-term projects, and removal of excess chemical inventory
- *Unplanned episodic event* means an episodic event that the generator did not plan or reasonably did not expect to occur, including production process upsets, product recalls, accidental spills, or "acts of nature," such as tornado, hurricane, or flood.

(§ 262.231)

Events Per Year

- One episodic event per year + one opportunity to petition EPA/ authorized state for a second event
- A generator can complete multiple projects during the time limit for the episodic event
- Petition process allows a total of 1 unplanned and 1 planned event per year
 - For example:
 - A generator conducts a clean out in the spring and then has an unexpected recall in October
 - A generator plans a small episodic project for the fall but a hurricane causes facility damage in July

Duration of an Episodic Event

- The first day of an episodic event is the first day of generation of waste for the event—for an unplanned event, this is the first day of the storm, spill, other unexpected event
- An episodic event can last 60 days
- All hazardous waste must be shipped off site by the end of 60 days or that waste counts toward the generator's category and must be managed under the regulations for that category of generator
- Time frame should allow waste from unplanned events to be characterized and allow arrangements for disposal to be made
- If a generator doesn't know if the event is going to be episodic, we recommend notification

Notification

- Both VSQGs and SQGs must notify about episodic events using Site ID form (EPA form 8700-12)
- Planned event: notify 30 or more days prior to the episodic event on Site ID form
- Unplanned event: notify within 72 hours of the event by phone or email and follow up with Site ID form

Notification elements

- A VSQG must get an EPA ID number (automatic upon submitting the Site ID form)
- Start and end dates of the episodic event (no more than 60 calendar days)
- Reason for the event
- Types of hazardous waste
- Estimated quantities of hazardous waste
- Emergency coordinator contact information

Hazardous Waste Accumulation Standards

- Necessary to ensure protective management of larger quantities of hazardous waste <u>VSQGs</u>
 - Marking and labeling:
 - "Episodic hazardous waste;"
 - An indication of the hazards of the contents; and the date the episodic event began
 - For tanks, inventory logs or other records are appropriate, but must be accessible
 - Manage the hazardous waste in a manner that minimizes the possibility of an accident or release
 - Containers should be in good condition, chemically compatible with contents, and kept closed
 - Part 265 subpart I would satisfy this condition
 - Tanks must have procedures in place to prevent overflow (*e.g.*, a means to stop inflow such as a waste feed cutoff system or bypass system to a standby tank when hazardous waste is continuously fed into the tank). Tanks must be inspected at least once each operating day.
 - Treatment is not allowed by VSQGs (except in an on-site elementary neutralization unit).
 - Hazardous wastes on drip pads and in containment buildings cannot be managed under subpart L

Hazardous Waste Accumulation Standards

SQGs

- Marking and labeling:
 - "Episodic Hazardous Waste;"
 - · An indication of the hazards of the contents and the date the episodic event began
 - For tanks, inventory logs or other records are appropriate, but must be accessible
- All conditions of 262.16 (e.g., container and tank standards, employee training, emergency preparedness and prevention)
- Hazardous wastes on drip pads and in containment buildings cannot be managed under subpart L

Recordkeeping

- Cradle to grave management of hazardous waste is required
- Records must be maintained for 3 years from the completion of each event

Elements

- Beginning and end date of the episodic event
- A description of the episodic event
- Types of hazardous wastes generated
- Quantities of hazardous wastes generated
- How the hazardous waste was ultimately managed and the name of the RCRAdesignated facility or facilities that received the hazardous waste
- Name of the hazardous waste transporter(s)
- Approval letter from EPA if a petition was submitted and approved for a second event
- Copies of the notification form and the hazardous waste manifest cover most of the elements.

Petition for a Second Event

• If petition is approved, total of one planned and one unplanned event per calendar year

Petition requirements

- Made in writing
- Include reason for the event; nature of the event; estimated amount of hazardous waste to be managed; how the waste will be managed; estimated length of the episodic event; and information about the previous event in the calendar year

Planned event

- Petition submitted to EPA/authorized state 30 or more days prior to the event
- Generator may not manage hazardous waste from a planned second episodic event under subpart L until approval is received on its petition

<u>Unplanned event</u>

- EPA/authorized state must be notified within 72 hours by phone or email, followed by submittal of 8700-12 and an indication that this is a petition for a second event
- Generators can manage hazardous waste from an unplanned second episodic event under subpart
 L while waiting for approval of its petition
- If a petition is denied, generator must start managing hazardous waste under the conditions for the applicable generator category.

Episodic Generation - Example 1

- **Planned event**: In early 2019, an SQG plans a maintenance project in the fall and anticipates they are likely to exceed the SQG limit of 1000 kg in October 2019.
- The event starts September 17, 2019, and is scheduled to be completed by November 5, 2019. Sixty days are over on November 16, 2019.
 - This CAN be an EPISODIC EVENT!
- Preparation:
 - SQG identifies waste codes for waste to be generated and estimates waste amounts
 - SQG notifies state before August 18, 2019, using the Site ID form (30 days before the event begins)
 - SQG sets up contracts and plans for waste transport and management. All waste must be off site by November 16th.

Episodic Generation - Example 1 (continued)

• **Planned event**: In early 2019, an SQG plans a maintenance project in the fall and anticipates they are likely to exceed the SQG limit of 1000 kg in October 2019.

• Event:

- SQG completes maintenance project, manages the hazardous waste under 262.16 standards and sends all waste for hazardous waste management.
- (If the event or waste management runs past November 16th, the SQG must begin operating as an LQG)

• After Event:

- SQG maintains records for the event for 3 years (a description of the event and notifications & manifests).
- If SQG has ANOTHER episodic event in 2019 after the maintenance project is over and it is unplanned, it can petition the state for a second event.

Episodic Generation - Example 2

- **Unplanned event**: In March 2019, a VSQG experiences a storm that causes a spill of product, and they expect the clean up will cause them to exceed the 100 kg limit for March and April, 2019.
- The storm occurs on March 8. This is the first day of the event. The VSQG isn't sure if spilled chemicals are hazardous waste but they suspect they may be. Sixty days are over on May 7, 2019.
 - This CAN be an EPISODIC EVENT!

Episodic Generation - Example 2 (continued)

• **Unplanned event**: In March 2019, a VSQG experiences a storm that causes a spill of product, and they expect the clean up will cause them to exceed the 100 kg limit for March and April, 2019.

• Event:

- VSQG notifies state within 72 hours by call or email & follows up with a Site ID form; if the VSQG already had a planned event in 2019, it must submit a petition and can operate under the episodic standards while waiting for approval from the state
- VSQG samples hazardous waste and sets up hazardous waste transportation and disposal
 - If the clean up material is not hazardous waste or does not exceed the VSQG threshold, the generator can work with the state to cancel the event
- VSQG completes cleanup, manages the hazardous waste under VSQG episodic generator standards and sends all waste for HW management by May 7th.
- (If the event or waste management runs past May 7th, the VSQG must begin operating as an SQG or LQG, as appropriate)

• After Event:

- VSQG maintains records for the event for 3 years (notifications and manifests)
- If VSQG has ANOTHER episodic event (planned) in 2019 after the clean up is over, it has to petition the state for a second event.



Issue that the New Consolidation Provision Addresses

- Some companies would like to be able to consolidate wastes from their own VSQG sites for more efficient shipping and hazardous waste management
 - Reduces liability for company as a whole by ensuring proper management of hazardous waste
 - Sending to a RCRA-designated facility is the most environmentally sound option
 - Previously, an LQG needed a RCRA permit to receive VSQG wastes

New Consolidation Provision

- Consolidate waste at an LQG under the control of the same person:
 - Person as defined under RCRA in § 260.10 means an individual, trust, firm, joint stock company, Federal Agency, corporation (including a government corporation), partnership, association, State, municipality, commission, political subdivision of a State, or any interstate body
 - Control means the power to direct policies at the facility
- VSQG standards
 - Marks and labels waste containers with "Hazardous Waste" and the hazards (as discussed in Module 2)
- No hazardous waste manifest is required and hazardous waste transporters do not have to be used

LQG standards

- Notifies state on Site ID Form that it is participating in this activity and identifies which
 VSQGs are participating
- Recordkeeping for each shipment normal business records
- Adds accumulation start date to VSQG HW labels when arrives at LQG
- Manages consolidated waste as LQG hazardous waste including ensuring final treatment or disposal is at a RCRA-designated facility (TSDF or recycler)
- Reports in Biennial Report there is a different source code (G51) for the VSQG consolidated waste to distinguish from the LQG's own generated waste
- We did not extend this provision to allow SQGs to consolidate VSQG HW due to more complicated implementation issues but an SQG can participate <u>if</u> they notify and act as an LQG (meeting all LQG standards including getting the VSQG HW off-site in 90 days)

FAQs about New Consolidation Provision

- When does the 90-day clock start for VSQG consolidated waste?
 - When the VSQG waste gets to the LQG, the 90-day clock to accumulate the waste starts
- Is there any accumulation limit for how much waste can be consolidated at an LQG?
 - No, there is no overall accumulation limit but the waste must be sent off-site to a RCRA TSDF or recycler within 90 days
- Does the LQG add the VSQG waste to its annual generation amount?
 - The LQG would report both its own generated waste and the waste consolidated from its VSQGs on the Biennial Report. However, there is a different source code (G51) for the VSQG waste so they can distinguish between their own HW and the consolidated waste

FAQs about New Consolidation Provision

- When transporting the waste from the VSQG to the LQG, what requirements must be met?
 - There are no specific RCRA requirements for the transport but any applicable DOT requirements would continue to apply
- Is there a quantity limit for shipments from the VSQG?
 - No, but the VSQG has to stay within its own accumulation limit
- Can the VSQG and the LQG be in different states?
 - Yes, if both states have adopted the consolidation provision. If the HW is transported through other states, the generator should check with the transit state to see if they can pass through

FAQs about New Consolidation Provision

- What marking and labeling should be on the containers?
 - At the VSQG, the words "Hazardous Waste" and the hazards
 - At the LQG, the words "Hazardous Waste," the hazards, and the accumulation start date
- Can the LQG consolidate VSQG HW with in the same container with their own LQG HW?
 - Yes, if the waste is compatible. The LQG would need to use the earlier accumulation state date on the combined HW to determine how long the combined HW can remain on-site.

VSQG Waste Consolidation at LQGs - Example

- Army reserve facilities that are VSQGs could consolidate their HW at an Army base that is an LQG (assuming they are in states that have adopted the consolidation provision)
 - They could transport the waste themselves and would not need to manifest it as long as the LQG has notified, including listing the participating VSQGs on the Site ID form
 - The Army reserve sites (the VSQGs) would need to mark the containers with the words "Hazardous Waste" and the hazards of the waste in the containers. For example, if they generate spent solvents that are ignitable, the containers could be marked:



VSQG Waste Consolidation at LQGs - Example

- Once the VSQG waste arrives at the Army base, the LQG would add the accumulation start date and manage the waste as LQG waste, including getting it off-site to a TSDF in 90 days
- The LQG would also keep the shipping records of the waste received from the VSQG for 3 years
 - These records would include:
 - the name, address, and contact info for the VSQG, and
 - a description of the waste received, including the quantity and date the VSQG waste was received
- The LQG would report the VSQG waste consolidated at their site on their BR using the new source code (G51) on the GM form

Module 4: Changes to SQG and LQG Standards

Contents of Module 4

- Satellite Accumulation Areas
- Waiver to 50-Ft Requirement
- Waste Accumulation in Drip Pads and Containment Buildings
- Personnel Training for LQGs
- Emergency Preparedness and Planning
- Closure

Satellite Accumulation Areas (SAAs)

- SAA standards are now found in their own part of the generator regulations §262.15
- What is a Satellite Accumulation Area (SAA)?
 - A location at a generator's facility where the generator accumulates up to 55 gallons of hazardous waste (or 1 quart of acute hazardous waste) in containers that are 1) at or near any point of generation, and 2) under the control of the operator
 - SAAs have fewer requirements than central accumulation areas, provided the generator complies with the regulations in section 262.15

Revisions to SAA Standards

- Changes include:
 - Explicitly state that hazardous wastes not be mixed or placed in a container with other hazardous wastes that are incompatible – applying the same storage standard for SAAs as CAAs in regard to incompatible wastes
 - Allow containers to remain open temporarily under limited circumstances, when necessary for safe operations
 - Provides maximum weight (1 kg) in addition to volume (1 quart) for acute hazardous waste limit

Revisions to SAA Standards (continued)

- Clarifies that "three days" means three consecutive calendar days for when waste must be moved to CAA or permitted TSDF
- Rescinds memo allowing reactive hazardous waste to be stored away from the point of generation
 - If waste is so dangerous it needs to be stored separately, then it needs to go directly to the
 CAA
- Makes marking and labeling regulations consistent with central accumulation areas
 - Labeled with the words "Hazardous Waste" and the hazards
 - Do not need an accumulation start date but do need to move in 3 calendar days when accumulation limit is reached – either to the CAA or TSDF and mark the date the accumulation limit is reached

Preamble Clarifications re: SAAs

"Under the Control of the Operator" means:

- The operator is someone familiar with the operations generating the HW
- Is aware of and able to attend to these operations, if needed
- Provides some measure of controlled access

Some examples of demonstrating the SAA is under the control of an operator:

- The operator controls access to SAA by access card, key, or lock box
- The operator accumulates waste in a locked cabinet and controls access to the key (even if access to the room is not controlled)
- The operator is regularly in view of the SAA during the course of their job
- The operator is able to see if anyone enters or exits the SAA
- * There can be more than one operator having control of the SAA

Waiver to 50-Foot Requirement

What changed?

• Final rule allows LQGs to apply for a site-specific waiver from this requirement from the authority having jurisdiction (AHJ) over the fire code (e.g., fire marshal or fire department) if the AHJ believes that the precautions taken by the facility make the waiver appropriate and safe (§262.17(a)(1)(vi)). The AHJ will help the LQG determine a safe and practical location. The LQG is then required to keep the written approved waiver in their records.

Why the change?

• The generator regulations previously required that containers holding ignitable or reactive waste be located at least 15 m (50 feet) from the facility's property line, with no exceptions. Meeting this requirement could be impossible, especially in urban areas where properties are sometimes less than 100 feet wide

Drip Pads and Containment Buildings

What changed?

- Clarifies that SQGs may accumulate hazardous waste on drip pads and in containment buildings, provided they:
 - Meet the standards found in Part 265, subparts W and DD, for drip pads and containment buildings, respectively
 - Meet all of the conditions specified in § 262.16 for SQGs accumulating hazardous wastes in these units (§ 262.16(b)(4-5))
- Restated Agency technical guidance and clarified in preamble that VSQGs may accumulate hazardous wastes on drip pads provided they comply with 40 CFR part 265 subpart W standards.
- Note: SQGs only have 90 days to accumulate hazardous wastes in containment buildings

Why the change?

- Drip pads and containment building regulations only addressed LQGs and TSDFs not SQGs accumulating hazardous wastes
- Therefore, it appeared that SQGs must comply with LQG regulations when generating SQG quantities of hazardous wastes monthly

Personnel Training for LQGs

- Maintains existing regulatory framework/standards, but explicitly allows the use of computer-based tools:
 - "Facility personnel must successfully complete a program of classroom instruction, online training (*e.g.*, computer-based or electronic), or on-the-job training that teaches them to perform their duties in a way that ensures compliance with this part."

(§ 262.17(a)(7)(i)(A))

- Generator Rule made a wide variety of revisions to the emergency planning and preparedness standards.
 - SQG regulations—§§262.16(b)(8) & (9)
 - LQG regulations—§ 262.17(a)(6) refers generators to part 262 subpart M
- Revisions are designed to improve emergency responders' ability to respond to events, improving compliance with existing standards, and clarifying ambiguous regulations.
 - Scope of regulations
 - Contingency Plan Quick Reference Guide
 - Documentation of Arrangements
 - Technical Changes

Scope of the Emergency Preparedness and Planning Regulations

- Previous emergency preparedness regulations in part 262.34 stated that generators must comply "with the standards for owners and operators in subparts C and D in 40 CFR part 265" for LQGs and "the standards of subpart C of part 265" for SQGs
- Subparts C and D of part 265 do not include applicability statements relevant to generators of hazardous waste, making it unclear where these standards apply at a generator's site
- Revised regulations clearly specify that the emergency planning and preparedness standards apply where hazardous waste is being generated or accumulated at the generator's site—includes points of generation, satellite accumulation areas, and central accumulation areas (90-day areas)
- One-Plan is still applicable for generators under multiple statutes

Contingency Plan Quick Reference Guide

- The Quick Reference Guide is a new part of an LQG's contingency plan designed to provide easy access for emergency responders to the most critical information for an immediate response to an event
- New LQGs submitting contingency plans must also include a Quick Reference Guide
- Existing LQGs to include a Quick Reference Guide when they otherwise update and submit their contingency plan

(§ 262.262)

Contingency Plan Quick Reference Guide

- Contents of the Quick Reference Guide (eight elements)
 - Types/names of hazardous waste and associated hazards
 - Estimated maximum amounts of hazardous wastes
 - Hazardous wastes requiring unique/special treatment
 - Map showing where hazardous wastes are generated, accumulated or treated at the facility
 - Map of facility and surroundings to identify routes of access and evacuation
 - Location of water supply
 - Identification of on-site notification systems
 - Name of emergency coordinator(s) or listed staffed position(s) and 7/24-hour emergency telephone number(s)
- EPA encourages generators to work with local emergency authorities and others to identify additional information that could be included

Quick Reference Guide Example (pg 1)

EXAMPLE QUICK REFERENCE GUIDE

This example was created by EPA Region 7 to be used as a guide to assist the regulated community with compliance. It does not substitute for or replace any regulatory requirements.

Contingency plan quick reference guide

ABC FACILITY

1000 SW Main Street

Anytown, Iowa 50000

Facility Contacts:


Primary Emergency Coordinator: George Washington Mobile Number (24/7): 515-555-0000
Secondary Emergency Coordinator: Abraham Lincoln Mobile Number (24/7): 515-555-0001
Tertiary Emergency Coordinator: Martha Washington Mobile Number (24/7): 515-555-0002

Note: ABC Facility operates 3 shift, 24/7, but the order of contact during an emergency is listed above.

Hazardous Waste Information:

| Name of Waste | Waste Codes/Hazards | Location Accumulated | Maximum Amounts Present | Response Notes | Special Notes to |
|---------------------------|--------------------------------------|---------------------------|------------------------------|---------------------------------------|---------------------------|
| | | | | | Hospital/Treatment |
| | | | | | personnel |
| Paint Related Wastes | D001 (ignitability, flash point <140 | NW corner of | Five, 55-gallon drums (2,065 | If personnel come into direct contact | None |
| (liquid) | °F); F003, F005 (Benzene, Methyl | Warehouse, hazardous | pounds) | with material, decontamination at the | |
| | Ethyl Ketone, Toluene, Toxicity) | waste storage area | | hospital may be required prior to | |
| | | | | treatment. | |
| Paint Related Wastes | D001 (ignitability, flash point <140 | Two Satellite | One, 55-gallon drum (440 | If personnel come into direct contact | None |
| (liquid) | °F); F003, F005 (Benzene, Methyl | Accumulation Areas as | pounds) | with material, decontamination at the | |
| | Ethyl Ketone, Toluene, Toxicity) | noted with blue asterisks | | hospital may be required prior to | |
| | | on the attached map. | | treatment. | |
| Off-specification 2, 4-D, | D016 (toxicity); Flashpoint 190 °F. | SW corner of warehouse | Off-Spec – 1 tank, 1,000 | Use PPE to prevent contact with skin | Contact Chemtrac for |
| a herbicide, (brand | | near new product | gallons | and eyes. Immediately prevent spills | emergency medical |
| name is Amine 4) | | storage of Amine 4. | New product – 1 tank (same | from entering drains and waterways. | treatment information at |
| (liquid) | | | tank as off-spec), 1,000 | Prevent sources of ignition and open | 1-800-424-9300. |
| | | | gallons | flames. | If in eyes, wash eyes for |
| | | | | | several minutes. |

Quick Reference Guide Example (pg 2)

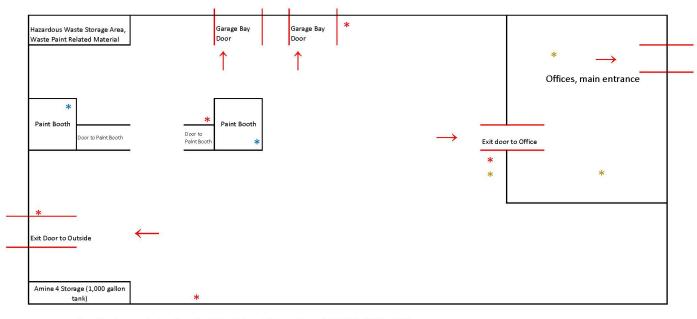

- * Satellite Accumulation Area for Paint Related Waste Material (D001, F003, F005)
- * Fire Alarms (ring on-site only, there are no fire alarms that notify off-site personnel)
- * Telephone for off-site notification of emergency


Indicates evacuation route out of the building.

Note 1: Hazardous waste (paint related waste) is generated and accumulated inside each of the two paint booths, and is accumulated in the hazardous waste storage area. Amine 4 can be a hazardous waste if it is off-specification and it is generated and accumulated in the SW corner at the Amine 4 tank.

Note 2: Smoke detectors are located throughout the office and main warehouse on the ceiling, in a grid about every 25 feet. Smoke detectors are connected to an automatice sprinkler system.

Quick Reference Guide Example (pg 3)

Street Map

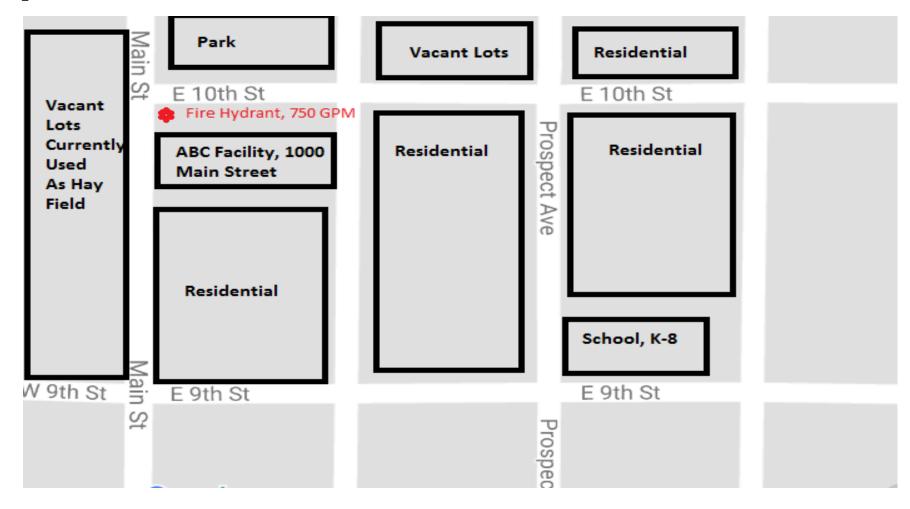

Emergency Preparedness and Planning

Making and Documenting Arrangements with Local Emergency Responders

- The standard requiring generators to make arrangements with local emergency responders is found in the previous regulations in part 265 subpart C (§ 265.37), applicable to both SQGs and LQGs.
- § 262.37(b) stated that when the state or local authorities refused to enter into agreements, it must be documented.
- Under the revisions, generators must document that they have attempted to make arrangements with local emergency responders (or that arrangements were sought but not obtained) and keep the documentation in the facility's operating record
- No specific form or type of documentation is required and additional flexibility is provided regarding where documentation can be retained

(§ 262.16(b)(8)(vi) & § 262.256)

Emergency Preparedness and Planning

- LQGs can eliminate unnecessary employee personal information in the contingency plan (§ 262.261(d))
 - Replacing addresses and phone numbers of employees with an emergency telephone number and, where applicable, a position title, as long as the number is staffed at all times
- SQGs and LQGs may determine the most appropriate locations for emergency equipment, when it is not possible or unsafe to have the equipment located immediately next to the generating equipment (§ 262.16(b)(8)(ii)/§ 262.252)
- Add "direct or unimpeded access" as a meaning for the term "immediate access" in SQG and LQG regulations (§ 262.16(b)(8)(iv)/§ 262.254)
- Stating that SQGs the location relevant emergency response information should be posted is "next to the telephone" (§ 262.16(b)(9)(ii))
- Clarify that SQGs have the option to use contractors to address releases (containment/cleanup) (§ 262.16(b)(9)(iv)(B))
- Large facilities with internal response capabilities may seek a waiver from entering into arrangements with local authorities (§ 262.16(b)(8)(vi)(C)/§ 262.256(c)

Closure: What Changed?

- Consolidates closure standards in one place
- Requires LQGs to notify EPA or the implementing state when closing a facility and/or accumulation unit
- Requires LQGs accumulating hazardous wastes in containers to close as a landfill if unable to meet closure performance standards (i.e., they can't clean close)
- Clarifies that closure does not apply to SAAs

Why did we make changes?

- Previous regulations confusing and contradictory
- Consolidates and streamlines regulations to improve user-friendliness
- Closes important gaps:
 - Prior to this rule, EPA and most states had no idea when an LQG closed its facility or waste accumulation unit
 - LQGs accumulating hazardous wastes in tanks, containment buildings and drip pads must close as landfill (or equivalent) if unable to meet closure performance standards
 - LQGs accumulating hazardous wastes in containers had no such requirements
 - Yet, numerous damage cases found where LQGs accumulating hazardous wastes in containers abandoned their facility leaving EPA and/or states to clean up as Superfund removal action – often costing millions

Closure Notification

- Requires LQGs to notify EPA or state when closing a facility via Site ID form
 - 30 days *prior* to closing facility and
 - 90 days *after* closing facility to certify that they met closure performance standards
 - Extension requests must be submitted within 75 days after closing
- Provides option of LQG closing waste accumulation unit to:
 - Place a notice in operating record within 30 days *after* closing waste accumulation unit and address closure when facility closes (notice can be removed from the operating record if unit going back into service), OR
 - Notify EPA or state they have met closure performance standards for their waste accumulation units
 - 90 days *after* closure via Site ID form 8700-12

Closure Standards

- Consolidates performance standards found in § 265.111 and §265.114 into LQG section (§262.17(a)(8)) and clarifies that these units are subject to clean closure standards
- LQGs for containers, tanks, and containment buildings must:
 - 1. Minimize and control post-closure care releases of hazardous waste and constituents to the environment
 - 2. Remove or decontaminate all contaminated structures, equipment, and soils
 - 3. Manage any hazardous waste generated in the process of performing closure according to Subtitle C
 - 4. If the LQG cannot clean close, then they must close as a landfill and meet the requirements of Subparts G and H of 40 CFR 265
- Note: LQG drip pad operators are subject to 1 and 3 above and 265 Subpart W in lieu of 40 CFR 265 Subparts G and H

Closure: Comparison of New vs. Old Requirements

| NEW | OLD |
|---|---|
| § 262.17 (a) (8) (i) Notification for closure of a waste accumulation unit. (ii) Notification for closure of the facility. | |
| (iii) Closure performance standards for containers, tank systems, and containment building waste accumulation units. | |
| (A) At closure, the generator must close the waste accumulation unit or facility in a manner that: | § 265.111 The owner or operator must close the facility in a manner that: |
| (1) Minimizes the need for further maintenance by controlling, minimizing, or eliminating, to the extent necessary to protect human health and the environment, the post-closure escape of hazardous waste, hazardous constituents, leachate, contaminated run-off, or hazardous waste decomposition products to the ground or surface waters or to the atmosphere, | (a) Minimizes the need for further maintenance, and (b) Controls, minimizes or eliminates, to the extent necessary to protect human health and the environment, post-closure escape of hazardous waste, hazardous constituents, leachate, contaminated runoff, or hazardous waste decomposition products to the ground or surface waters or to the atmosphere, and (c) Complies with the closure requirements of this subpart, including, but not limited to, the requirements of §§265.197, 265.228, 265.258, 265.280, 265.310, 265.351, 265.381, 265.404, and 265.1102. |

Closure: Comparison of New vs. Old Requirements

(2) Removes or decontaminates all contaminated equipment, structures and soil and any remaining hazardous waste residues from waste accumulation units including containment system components (pads, liners, etc.), contaminated soils and subsoils, bases, and structures and equipment contaminated with waste, unless § 261.3(d) of this chapter applies.

NEW

(3) Any hazardous waste generated in the process of closing either the generator's facility or unit(s) accumulating hazardous waste must be managed in accordance with all applicable standards of parts 262, 263, 265 and 268 of this chapter, including removing any hazardous waste contained in these units within 90 days of generating it and managing these wastes in a RCRA Subtitle C hazardous waste permitted treatment, storage and disposal facility or interim status facility.

§265.114 Disposal or decontamination of equipment, structures and soils.

OLD

During the partial and final closure periods, all contaminated equipment, structures and soil must be properly disposed of, or decontaminated unless specified otherwise in §§265.197, 265.228, 265.258, 265.280, or 265.310. By removing all hazardous wastes or hazardous constituents during partial and final closure, the owner or operator may become a generator of hazardous waste and must handle that hazardous waste in accordance with all applicable requirements of part 262 of this chapter.

Closure: Comparison of New vs. Old Requirements

NEW OLI

(4) If the generator demonstrates that any contaminated soils and wastes cannot be practicably removed or decontaminated as required in paragraph (a)(8)(ii)(A)(2) of this section, then the waste accumulation unit is considered to be a landfill and the generator must close the waste accumulation unit and perform post-closure care in accordance with the closure and post-closure care requirements that apply to landfills (§ 265.310 of this chapter). In addition, for the purposes of closure, post-closure, and financial responsibility, such a waste accumulation unit is then considered to be a landfill, and the generator must meet all of the requirements for landfills specified in subparts G and H of part 265 of this chapter.

(iv) Closure performance standards for drip pad waste accumulation units.

not apply to satellite accumulation areas.

At closure, the generator must comply with the closure requirements of paragraphs (a)(8)(ii) and (a)(8)(iii)(A)(1) and (3) of this section, and § 265.445(a) and (b) of this chapter. (v) The closure requirements of paragraph (a)(8) of this section do

§ 265.197 (b) If the owner or operator demonstrates that not all contaminated soils can be practicably removed or decontaminated as required in paragraph (a) of this section, then the owner or operator must close the tank system and perform post-closure care in accordance with the closure and post-closure care requirements that apply to landfills (§265.310). In addition, for the purposes of closure, postclosure, and financial responsibility, such a tank system is then considered to be a landfill, and the owner or operator must meet all of the requirements for landfills specified in subparts G and H of this part.

Comparable text found for containment buildings.

Module 5 - Recordkeeping and Reporting

Contents of Module 5

- Recordkeeping
- Reporting
- Site ID Walk Through

Summary of New Recordkeeping Requirements

- New Recordkeeping Requirements
 - Episodic generation
 - VSQG consolidation
 - Tanks
 - Closure waste accumulation unit(s)
 - 50-foot waiver
 - Arrangements with local authorities

New Recordkeeping Requirements

- Episodic generation
 - Maintain records of episodic event and any approved petitions in operating record for 3 years
- VSQG consolidation at same-company LQG
 - LQG is required to keep records of shipments from the VSQG for 3 years
 - These can be normal business records
 - Must identify the name, site address, and contact information for the VSQG
 - Must include a description of the hazardous waste received, including the quantity and the date the waste was received

New Recordkeeping Requirements (continued)

- Tanks
 - SQGs and LQGs may use logs, monitoring equipment or other records to demonstrate that hazardous waste is either emptied or removed from the tank within 180 or 90 days (SQGs 262.16(b)(6)(ii)(C) and LQGs 262.17(a)(5)(ii)(C))
 - Regulations address both batch and continuous flow processes
- Records must be kept on site and readily available for inspections
 - Ideally these records will be in close proximity to where hazardous waste is being accumulated in the tank, or if not practical (i.e., exposure to weather, physically infeasible, etc.) in a control room, or other central location at the facility
- Bottom Line: Methods used to demonstrate that a tank has been emptied must be reasonable and easily discernible.

New Recordkeeping Requirements (continued)

- Closure of waste accumulation unit
 - Maintain information of closed units as part of operating record
- 50-Foot Waiver
 - Maintain approval of waiver as part of operating record
- Arrangements with local authorities
 - Maintain record of arrangements or attempt to make arrangements as part of operating record

Summary of New Reporting Requirements

- New Reporting Requirements
 - SQG Re-notification (Site ID form)
 - LQGs receiving wastes from VSQGs under control of same company (Site ID form & GM form of BR)
 - Episodic generation (Site ID form)
 - Biennial Reporting for Facilities Not Storing (WR form of BR)
 - Closure facility and/or waste accumulation units (Site ID form)
 - Quick response guide (Summary of contingency plan)

Site ID Form (8700-12)

- The Form has been updated to account for several changes related to notification
- It's on our website here:
- https://www.epa.gov/hwgenerators/instructions-and-form-hazardous-waste-generators-transporters-and-treatment-storage-and
- EPA has electronic reporting options available for the 8700-12/Site ID form in states that have opted in to using the electronic system
 - Check with your state to see if reporting electronically is an option

New Reporting Requirements

SQG Re-notification

- § 262.18(d) Re-notification.
 - (1) A small quantity generator must re-notify EPA starting in 2021 and every four years thereafter using EPA Form 8700–12. This re-notification must be submitted by September 1st of each year in which re-notifications are required.
- We expect many states to allow electronic reporting. EPA made the timeframe off-cycle with the Biennial Report to reduce the impact on state programs.
- Note: SQGs located in states with more frequent re-notification should comply with the state's timeframe. The more frequently state-collected data should be transferred into the national RCRA information management system or RCRAInfo by the state on the timetable above.

SQG Re-Notification (continued)

- Previously, SQGs were only required to notify once when obtaining a RCRA Identification number.
- EPA and many states have outdated information since SQGs may have gone out of business, changed regulatory category, etc.
 - Many notifications occurred over 30 years ago
- Without accurate and up-to-date generator universe information, both EPA and states cannot conduct necessary oversight and program management activities.

United States Environmental Protection Agency RCRA SUBTITLE C SITE IDENTIFICATION FORM



1. Reason for Submittal (Select only one.)

| | V | Obtaining or updating an EPA ID number for an on-going regulated activity that will continue for a period of time. (Includes HSM activity) | | |
|---|---|--|--|--|
| | | Submitting as a component of the Hazardous Waste Report for (Reporting Year) | | |
| SQG must check this box to re- notify | | Site was a TSD facility and/or generator of > 1,000 kg of hazardous waste, > 1 kg of acute hazardous waste, or > 100 kg of acute hazardous waste spill cleanup in one or more months of the reporting year (or State equivalent LQG regulations) | | |
| | | Notifying that regulated activity is no longer occurring at this Site | | |
| | | Obtaining or updating an EPA ID number for conducting Electronic Manifest Broker activities | | |
| | | Submitting a new or revised Part A Form | | |

New Reporting Requirements (continued)

LQGs Receiving Wastes from VSQGs

- LQGs must submit Site ID form:
 - 1. Notifying EPA/state that they are receiving hazardous waste from VSQGs under the control of same company, and
 - 2. Identifying in addendum each VSQG they are receiving waste from, including name and address of facility and contact name and telephone number.
- See next slides for how to fill out the Site ID form

LQG Notification for Consolidation of VSQG waste

14. LQG Consolidation of VSQG Hazardous Waste



Are you an LQG notifying of consolidating VSQG Hazardous Waste Under the Control of the Same Person pursuant to 40 CFR 262.17(f)? If "Yes", you must fill out the Addendum for LQG Consolidation of VSQGs hazardous waste.

Check "Y" if LQG consolidating VSQG waste

ADDENDUM TO THE SITE IDENTIFICATION FORM: LQG CONSOLIDATION OF VSQG HAZARDOUS WASTE



ONLY fill out this form if:

You are an LQG receiving hazardous waste from VSQGs under the control of the same person. Use additional
pages if more space is needed.

| VSQG 1 | | | | | |
|---------------------------------|--------------------|---------------------------|------------|-------------|-------|
| 1. EPA ID Number (if assign | ned) 123456 | 2. Name | Facility X | | |
| 3. Street Address 123 Main St. | | | | | |
| 4. City, Town, or Village | Nowheresville | 5. State | Someplace | 6. Zip Code | 11111 |
| 7. Contact Phone Number | 555-555-5555 | 8. Contact Name Mr. Jones | | | |
| 9. Email Jones.Mr@facilityx.com | | | | | |

New Reporting Requirements (continued)

LQGs Receiving Wastes from VSQGs

- Reporting requirements provide oversight capability on part of EPA/states
 - Allows EPA/States to determine if LQG is complying with rule's provisions and capable of managing additional amounts of hazardous waste
- EPA plans to monitor this program and see if it should be expanded in the future

New Reporting Requirements (continued)

Episodic Generation

- When holding an episodic event, a generator must notify EPA/authorized state that they are doing so at least 30 days before the event (if planned) or within 72 hours (if unplanned)
 - Start and end date of episodic event
 - Reason for the event
 - Types of hazardous waste generated (federal and state waste codes)
 - Estimated amounts of hazardous waste to be generated
 - Emergency contact
 - Emergency phone number

SQG or VSQG Notification of Episodic Generation Event

13. Episodic Generation



Are you an SQG or VSQG generating hazardous waste from a planned or unplanned episodic event, lasting no more than 60 days, that moves you to a higher generator category. If "Yes", you must fill out the Addendum for Episodic Generator.

Check "Y" if VSQG or SQG holding an episodic event

ADDENDUM TO THE SITE IDENTIFICATION FORM: EPISODIC GENERATOR



| Episodic Event | | type of | | | |
|--|----------------|--|----------------------------------|------------|--|
| 1. Planned | event be | eing held | 2. Unplanned | | |
| Excess chemical inv | entory removal | | Accidental spills | | |
| Tank cleanouts | | | Production process upsets | | |
| Short-term construction or demolition | | Product recalls | | | |
| Equipment maintenance during plant shutdowns | | "Acts of nature" (Tornado, hurricane, flood, etc.) | | | |
| Other | | | Other | | |
| Emergency Contact Phone 4. Emergency Contact | | tact Name | | | |
| (202) 555-5555 | | Jane Smith | 20. | | |
| 5. Beginning Date | 7/15/19 | (mm/dd/yyyy) | 6. End Date 9/01/19 (mm/dd/yyyy) | | |
| Waste 1 | | | | | |
| 7. Waste Description | | 8. Estimated Quantity (in pounds) | | | |
| Removing old chemicals from a laboratory | | | | | |
| 9. Federal and/or State Hazardous Waste Codes Insert relevant waste codes | | | | | |
| D001 | D008 🧲 | IIISC | | iste codes | |

New Reporting Requirements (continued)

Biennial Reporting

- Clarifies in regulation that LQGs must complete and submit BR
- Requires LQGs to provide specific information found in EPA Form 8700–13 A/B rather than citing outdated information previously found at § 262.41 (a)(1)-(8)
 - Agency will issue FR notice, inform key stakeholders and place notice on EPA website if and when it modifies EPA Form 8700–13 A/B.
- Requires in regulation that LQGs identify all of the hazardous wastes they generated throughout the year, not just for months generator was LQG
- Requires LQGs consolidating VSQG waste to identify volumes and types of wastes but with new source code (G51) on GM form
- Requires facilities not storing hazardous wastes prior to recycling to complete BR

Recycler Who Needs to Report

United States Environmental Protection Agency RCRA SUBTITLE C SITE IDENTIFICATION FORM



1. Reason for Submittal (Select only one.)

Obtaining or updating an EPA ID number for an on-going regulated activity that will continue for a period of time. (Includes HSM activity)

Submitting as a component of the Hazardous Waste Report for 2019 (Reporting Year)

Site was a TSD facility and/or generator of > 1,000 kg of hazardous waste, > 1 kg of acute hazardous waste, or > 100 kg of acute hazardous waste spill cleanup in one or more months of the reporting year (or State equivalent LQG regulations)

Notifying that regulated activity is no longer occurring at this Site

Obtaining or updating an EPA ID number for conducting Electronic Manifest Broker activities

Submitting a new or revised Part A Form

Facilities Not Storing HW Prior to Recycling: Changes to the Site ID form as part of BR Submission

10. Type of Regulated Waste Activity (at your site)

Mark "Yes" or "No" for all current activities (as of the date submitting the form); complete any additional boxes as instructed.

| YN | 6. Recy | 6. Recycler of Hazardous Waste | | |
|--------|---------|---|--|--|
| 0 N | | a. Recycler who stores prior to recycling | | |
| | | b. Recycler who does not store prior to recycling | | |

Check both boxes if you are a recycler who doesn't store

New Reporting Requirements (continued)

Closure

- Closure of waste accumulation area Require LQGs to place notice in their operating record within 30 days after closure identifying location of unit within facility; or meet closure performance standards and notify EPA.
- Closure of facility
 - Notify EPA or authorized state no later than 30 days prior to closing facility, and
 - Notify EPA or authorized state within 90 days after closing facility that it has complied with closure performance standards or notify if it can't clean close
 - LQG can request extension but must notify EPA or authorized state within 75 days after closing facility

LQG Notification of Closure

15. Notification of LQG Site Closure for a Central Accumulation Area (CAA) (optional) OR Entire Facility (required)

| | Y N LQG Site Closure of a Central Accumulation Area (CAA) or Entire Facility. | | |
|---|---|--|--|
| 70" | _1 | A. Central Accumulation Area (CAA) Entire Facility | |
| | yes," select propriate B. Expected closure date: 07/04/2019 mm/dd/yyyy | | |
| option for A. C. Requesting new closure date: mm/dd/yyyy | | | |
| | | D. Date closed: mm/dd/yyyy 1. In compliance with the closure performance standards 40 CFR 262.17(a)(8) 2. Not in compliance with the closure performance standards 40 CFR 262.17(a)(8) | |

For B, C, and D, only fill out *ONE* depending on your closure stage

New Reporting Requirements (continued)

Emergency Response

As part of regulations, requires LQGs to submit Contingency Plan Quick Reference Guide to local emergency responders

Contents of the Quick Reference Guide (eight elements)

- Types/names of hazardous waste and associated hazards
- Estimated maximum amounts of hazardous wastes
- Hazardous wastes requiring unique/special treatment
- Map showing where hazardous wastes are generated, accumulated or treated at the facility
- Map of facility and surroundings to identify routes of access and evacuation
- Location of water supply
- Identification of on-site notification systems
- Name of emergency coordinator(s) or listed staffed position(s) and 7/24-hour emergency telephone number(s)

Module 6 - Implementation and State Adoption

Contents of Module 6

- Rule Process and Schedule
- State Adoption
- Stringency of the Final Rule
- EPA Resources
- Contacts

Rule Process & Schedule

- Rule signed on October 28, 2016
- Publication in Federal Register—November 28, 2016 (81 FR 85732)
- Effective Date 6 months from publication—May 30, 2017
- Rule went into effect in Iowa, Alaska, most territories, and tribal lands on the effective date
 - EPA runs the RCRA program in those states, most territories, and tribal lands

State Adoption

- Authorized states run the RCRA program in their state and thus, go through the state adoption & authorization process for this RCRA rule
 - Authorized states have to pick up the more stringent provisions, typically by
 July 1, 2018 (or July 1, 2019 if state law change is needed)
 - Authorized states can choose to pick up the less stringent provisions and those provisions that are considered equally stringent

Stringency of Final Rule

- More stringent provisions:
 - SQG re-notification
 - SAAs subject to incompatibility and emergency preparedness & prevention requirements
 - Identifying hazards of wastes being accumulated on labels and RCRA waste codes added prior to shipment
 - Notification of closure
 - Closure as a landfill for LQGs accumulating hazardous wastes in containers that cannot meet closure performance standards
 - Biennial reporting for whole year, not just months the generator is an LQG
 - Biennial reporting for recyclers who don't store prior to recycling
 - Quick Reference guide for contingency plans
- Less stringent provisions:
 - VSQG consolidation
 - Episodic generation
 - Waiver from 50-foot rule

EPA resources

Main generator website: https://www.epa.gov/hwgenerators


Generator Improvements Rule website: https://www.epa.gov/hwgenerators/final-rule-hazardous-waste-generator-improvements

Link to the map of states that have adopted the new rule: https://www.epa.gov/hwgenerators/where-hazardous-waste-generator-improvements-rule-effect

FAQs for implementing the new rule: https://www.epa.gov/hwgenerators/frequent-questions-about-implementing-hazardous-waste-generator-improvements-final-rule

We also plan to update existing guidance and resources as much as possible with new terms and citations

Where the HW Generator Improvements Rule is in Effect

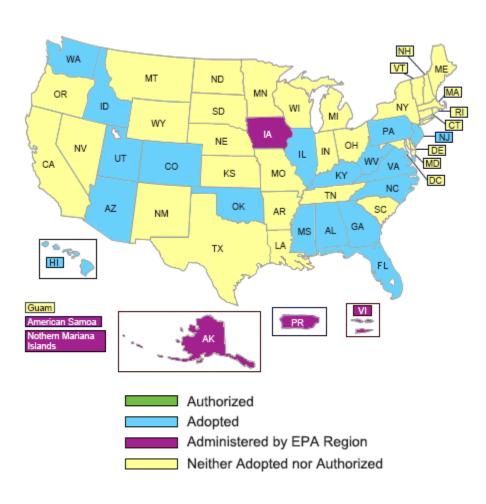

What resources would be helpful

- What new resources would you like to see?
- What materials on our website do you use the most and want us to update with new terms and citations?
- Email us your suggestions!

Points of Contact

- Kathy Lett
 - · 703-605-0761
 - Lett.Kathy@epa.gov
- Mary Beth Sheridan
 - · 703-308-4941
 - Sheridan.MaryBeth@epa.gov
- Brian Knieser
 - 703-347-8769
 - Knieser.Brian@epa.gov