
Renewable Energy Fact Sheet: Solar Cells

DESCRIPTION

Solar power is one of the most promising renewable energy sources today. Solar cells, also known as photovoltaic (PV) cells, can be used as Auxiliary and Supplemental Power Sources (ASPSs) for wastewater treatment plants (WWTPs). When photons in sunlight randomly impact the surface of solar cells, free electrons are generated, which flow to produce electricity.



Figure 1: Solar panels (or arrays) installed on the roof of an office building..


Solar cells are often assembled into flat plate systems that can be mounted on rooftops (Figure 1) or placed at other sunny locations (Figure 2). A solar cell is composed of several layers of different materials. The top layer is a glass cover or other encapsulating material designed to protect the cell from weather conditions.



Figure 2: Solar “tree” placed out in the open where sunshine is abundant, Styria, Austria.

Beneath the glass layer is an anti-reflecting layer that prevents the cell from reflecting sunlight away. Below this layer are two semiconductor layers that are typically made from *n*- and *p*- silicon (Figure 3).

A set of metallic grids or electrical contacts is placed around the semiconductor material, one above the material and the other below. The energy of the absorbed light is transferred to the semiconductor. The energy knocks electrons loose from the semiconductor, allowing them to flow freely. An electric field within the solar cell forces the freed electrons to move in a certain direction. The top grid, or contact, collects the flowing electrons from the semiconductor. The bottom contact layer is connected to the top contact layer to complete the circuit.

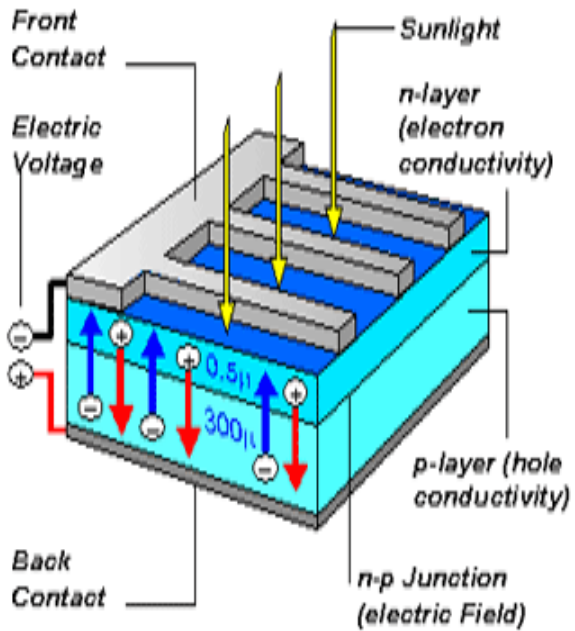

Back contact solar cell (Courtesy: ECN, The Netherlands)

Figure 3: Photovoltaic Solar Cell Diagram

This flow of electrons is the current, and by placing metal contacts on the top and bottom of the solar cell, that current can be drawn off to be used externally. This current, together with the cell's voltage (which is a result of the strength of its built-in electric field), defines the power (or wattage) that the solar cell can produce.

Solar cell efficiency varies and is determined by the material from which it is made and by the production technology used to make it. Commercially available solar modules are between 5 to 17 percent efficient at converting sunlight into electrical energy¹ and in some cases can be as high as 40%². Research is always underway to produce cost-effective solar panels with improved efficiency and higher wattage. In 2006, SunPower Corporation announced the company's newly developed SPR-315 solar panel which is 19.3% efficient and carries a rated power output of 193 kilowatts. The new SPR-315 solar panel is designed to generate more power with fewer panels, thus maximizing energy production while reducing installation cost.

SunPower also claims that the new SPR-315 solar panel performs better than most other solar panels during cloudy or hot weather. The SPR-315 solar panel is now commercially available^{3,4}.

Solar modules generally can produce electric energy in the range of 1 to 160 kilowatts (kW). An individual solar cell will typically produce between one and two watts. To increase the power output, several cells can be interconnected to form a module (Figure 4). Similarly, modules can be connected to form an array (Figures 1 and 2). A solar array with a surface area roughly the size of two football fields could produce 1,000 kW of peak power. Ideally, a backup storage system should be included with the solar system to store power so that it can be used during low light conditions, or at night.


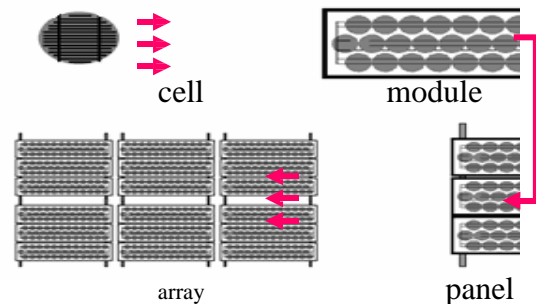


Figure 4: Solar Module Composed of Individual Solar Cells.

ADVANTAGES & DISADVANTAGES

There are several advantages to using solar cells. Solar cells can generate electricity with no moving parts, they can be operated quietly with no emissions, they require little maintenance, and they are therefore ideal for remote locations.

There are also disadvantages associated with the use of solar cells. Good weather and location are essential since solar cells require adequate sunlight

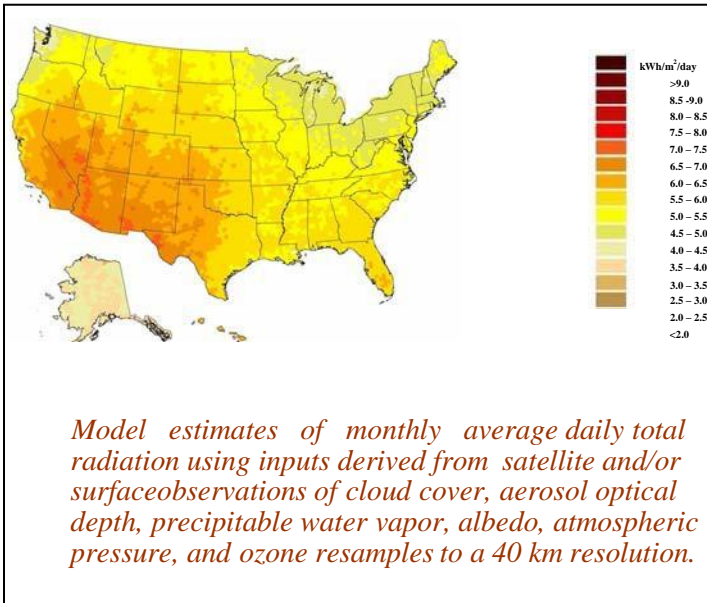

Source: Electricand HydrogenTechnologies and Systems Center, May 2004.⁵

Figure 5: Annual Solar Radiation in the U.S. (Flat Face, Facing South, Latitude Tilt).

to recharge. Some geographic locations do not receive adequate levels of sunlight throughout the year (Figure 5) and large areas are needed to generate power in regions that require considerable amounts of power. Although solar cells require very little maintenance, they can be difficult to repair when maintenance is needed. Additionally, the initial cost of solar cells is very high.

COST

Currently, installed solar systems cost from \$6.00 per kW to \$10,000 per kW. The cost of a solar system depends on the system's size, equipment options and installation labor costs. The average factory price of a solar panel is about \$5 per watt, excluding balance-of-system (BOS) costs. BOS costs can result in an additional 30% to 100% increase to the factory costs. Major BOS cost items include control equipment (maximum power point trackers, inverters, battery charge, and controllers), solar array support structures, battery storage (if included), installation and associated

fees, insurance, and data acquisition system and sensors.

Solar Energy prices have declined on average 4% per annum over the past 15 to 20 years. In the early 1980's, system costs were more than \$25 per watt. Costs are expected to decrease 40% by 2010. Improvements in conversion efficiencies and manufacturing economies of scale are the underlying drivers⁵.

APPLICATIONS OF SOLAR POWER AT WASTEWATER TREATMENT PLANTS

Several wastewater treatment plants have installed solar cells to generate electricity for process controls. Oroville, a town in Northern California, operates a 6.5 MGD WWTP which services 15,000 households and many industrial users. In 2002, amidst an energy crisis that saw the price of utilities rise 41 percent, the Oroville Sewage Commission (SC-OR) decided to pursue solar power as a solution to reduce costs and increase energy self-reliance. That same year, the utility installed a 520 kW ground-mounted solar array capable of being manually adjusted seasonally to maximize the solar harvest. The solar array consists of 5,184 solar panels covering three acres of land adjacent to the WWTP. The total cost of the solar system, which is the fifth-largest solar energy system in the United States, was \$4.83 million, with a rebate to the utility of \$2.34 million from the Self-Generation Incentive Program of Pacific Gas and Electric (PG&E) and managed through the California Public Utilities Commission (CPUC). SC-OR was able to see an 80% reduction in power costs.

The SC-OR solar array is designed to produce more power than the utility needs during peak hours, and because the system is connected to the local energy grid, it can feed all of the excess energy back to the power utility so that SC-OR can receive credit on their power bill. This credit goes toward paying for the off-peak power that the treatment plant uses at night. SC-OR saved \$58,000 in the first year and expects the solar array to pay for itself in 9 years.

In addition to using wind power, the 40 MGD Atlantic County Utilities Authority (ACUA) Wastewater Treatment Facility in Atlantic City, New Jersey, installed five solar arrays totaling 500 kilowatts for the facility⁶. The five solar arrays were placed at different locations throughout the facility and include two “ground-mount” arrays, two “roof-mount” arrays, and a “canopy” array. The roof-mount arrays are mounted such that they could withstand hurricane force winds.

The solar array can generate electricity at rates lower than 5 ¢ per kWh for the next 20 years. This is the second largest solar array in the state producing over 660,000 kWh of electricity annually or about 3% of the facility’s 20 gigawatt hours (GWh) annual electricity needs. This equivalent amount of energy displaces 388 barrels of oil and over 400,000 pounds of carbon dioxide. Energy rebates of \$1.9 M were obtained from the New Jersey Board of Public Utilities and an additional anticipated savings of over \$35,000 is expected each year. The total cost of the project was about \$3.9 million.

In 2001, SolarBee Inc. developed the SolarBee®, which is a floating solar-powered circulator that is capable of moving up to 10,000 gallons of water per minute for long distances (Figure 6). The SolarBee® possesses battery storage for up to 24-hour operation, which is beneficial during low sunlight conditions. A single SolarBee® unit can effectively aerate a 35 acre lake or treat a 25 million gallon drinking water reservoir or tank.



Figure 6: SolarBee® Surface Aerator manufactured by SolarBee,® Inc.

Since its creation, over 1,000 units have been installed in many treatment applications including wastewater lagoons. Use of the SolarBee® circulator can effectively improve biochemical

oxygen demand and sludge reductions, control odor, and reduce total solids and ammonia concentrations in the effluent.

Benefits of using solar-power aerators not only include energy savings, but also reduces odor, greenhouse gas emissions, and biosolids volume at the bottom of a pond or basin that would otherwise have to be dredged and disposed.

In 2005, the City of Myrtle Beach in South Carolina installed five SolarBees® into the first three cells of the city’s 50-acre wastewater lagoon (Figure 7). Improvements in dissolved oxygen and H₂S levels within the lagoon after a few months prompted the city to budget for five additional SolarBees® for the following year. Once installed, electrical savings is expected to average \$100,000 per year.



Figure 7: SolarBee® Installed in City of Myrtle Beach, South Carolina, 50-Acre Wastewater Lagoon

The City of Somerton, in southwest Arizona replaced a 40-horsepower wastewater lagoon aeration motor with four solar-power aerators. The project cost was about \$100,000 with an annual expected electric energy cost savings of \$25,000. Other applications of solar-powered aerators include the Wastewater Treatment Facility in Bennett, Colorado and the Town of Discovery Bay Community Services District (TDBCSD) Wastewater Treatment Plant,

California.

REFERENCES

1. Technical Information on Photovoltaics.

http://www.ece.gatech.edu/research/UCEP/papers/solarfaq_v2.pdf.

Retrieved September 26, 2007.

2. Renewable Energy Access.Com. 2006. Solar Cell Breaks the 40% Efficiency Barrier.

<http://www.renewableenergyaccess.com/rea/news/story?id=46765>.

Retrieved September 26, 2007.

3. SunPower Corporation. 2007. SunPower announces high power, higher efficiency solar panels.

<http://investors.sunpowercorp.com/releasedetail.cfm?ReleaseID=214653>.

Retrieved September 26, 2007.

4. Solar Panel Efficiency and Performance Information. http://www.sunpowercorp.com/Products-and-Services/~media/Downloads/for_products_services/SPWR315_DS.ashx.

Retrieved September 26, 2007.

5. National Renewable Energy Lab. Solar Maps.

<http://www.nrel.gov/gis/solar.html#csp>.

Retrieved September 26, 2007.

6. Atlantic County Utilities Authority (ACUA). Atlantic City Solar Array Project.

<http://www.acua.com/about/pressrelease1.cfm?id=93>.

Retrieved July 9, 2007.

7. Shelly, P. City of Myrtle Beach Cleaned Up by "Bees". http://www.solarbee.com/news/SC_EnergyConnectionWinter2006.pdf

Retrieved September 26, 2007.

Some of the information presented in this fact sheet was provided by the manufacturer or vendor and could not be verified by the EPA.

The mention of trade names, specific vendors, or products does not represent an actual or presumed endorsement, preference, or acceptance by the EPA or federal government. Stated results, conclusions, usage, or practices do not necessarily represent the views or policies of the EPA.

**Environmental Protection Agency
Office of Wastewater
Management
EPA 832-F-13-019
August 2013**