



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
REGION 3  
1650 Arch Street  
Philadelphia, Pennsylvania 19103-2029

**AUTHORIZATION TO DISCHARGE UNDER THE  
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM**

**NPDES Permit No. DC0000175**

In compliance with the provisions of the Clean Water Act, 33 U.S.C. §§ 1251 *et seq.*, as amended by the Water Quality Act of 1987, P.L. 100-4, the “Act”,

**Bardon, Inc**  
**(d/b/a Aggregate Industries, aka Super Concrete)**

is authorized to discharge from a facility located at

**Bardon, Inc (d/b/a Aggregate Industries, aka Super Concrete)**  
**5001 Fort Totten Drive, NE**  
**Washington, D.C. 20011**

to receiving waters named

**Unnamed tributary to Northwest Branch of the Anacostia River**

in accordance with discharge point(s), effluent limitation, monitoring requirements and other conditions set forth herein.

This permit shall become effective October 1, 2020.

This permit and the authorization to discharge shall expire at midnight on September 30, 2025.

This permit and the authorization to discharge shall expire five (5) years from effective date, unless the permittee has submitted a complete and timely application for a new permit, and the U.S. Environmental Protection Agency (EPA), through no fault of the permittee, does not issue a new permit before the expiration date of this permit. In such a case, the permit will be administratively extended until EPA issues a new permit.

The permittee shall apply for permit reissuance on or before April 3, 2025, 180 days before the expiration of this permit if the permittee intends to continue operations and discharges at the facility beyond the term of this permit.


Signed this \_\_\_\_ day of \_\_\_\_\_

\_\_\_\_\_  
Catherine A. Libertz, Director  
Water Division

## TABLE OF CONTENTS

PART I. LIMITATIONS AND MONITORING REQUIREMENTS .....	5
Section A. Authorized Discharges .....	5
Section B. Interim Effluent Limitations and Monitoring Requirements – Outfall 004, Northwest Branch of the Anacostia River.....	5
Section C. Final Effluent Limitations and Monitoring Requirements – Outfall 004, Northwest Branch of the Anacostia River.....	6
Section D. The Use of Sufficiently Sensitive Test Methods .....	7
Section E. Special Reporting Requirements .....	7
PART II. STANDARD CONDITIONS .....	8
Section A. General Conditions.....	8
1. Duty to Comply .....	8
2. Permit Actions .....	8
3. Duty to Provide Information.....	9
4. Reopener Clause .....	9
5. Oil and Hazardous Substance Liability.....	9
6. Property Rights .....	9
7. Confidentiality of Information.....	9
8. Duty to Reapply.....	10
9. State Authorities .....	10
10. Other Laws.....	10
Section B. Operation & Maintenance of Pollution Controls.....	10
1. Proper Operation and Maintenance.....	10
2. Need to Halt or Reduce Not a Defense .....	10
3. Duty to Mitigate.....	11
4. Bypass.....	11
5. Upset.....	12
Section C. Monitoring Requirements.....	12
Section D. Reporting Requirements.....	14
Section E. Definitions and Abbreviations .....	16
Section F. Commonly Used Abbreviations.....	21
Section G. Best Management Practices .....	22
1. Applicability .....	22
2. Best Management Practices Plan .....	22
3. Implementation .....	22
4. General Requirements.....	22
5. Specific Requirements .....	23
6. Hazardous Waste Management.....	23
7. Documentation.....	24

8. BMP Plan Modification .....	24
9. Modification for Effectiveness.....	24
<b>PART III. SPECIAL CONDITIONS.....</b>	<b>24</b>
Section A. Whole Effluent Toxicity (WET) .....	24
Section B. Additional Monitoring Requirements.....	28
Section C. Considerations under Federal Law [40 CFR §122.49] .....	29
1. Endangered Species.....	29
2. National Historic Preservation Act of 1966.....	29
Section D. Clean Water Act Section 401 Water Quality Certification .....	30

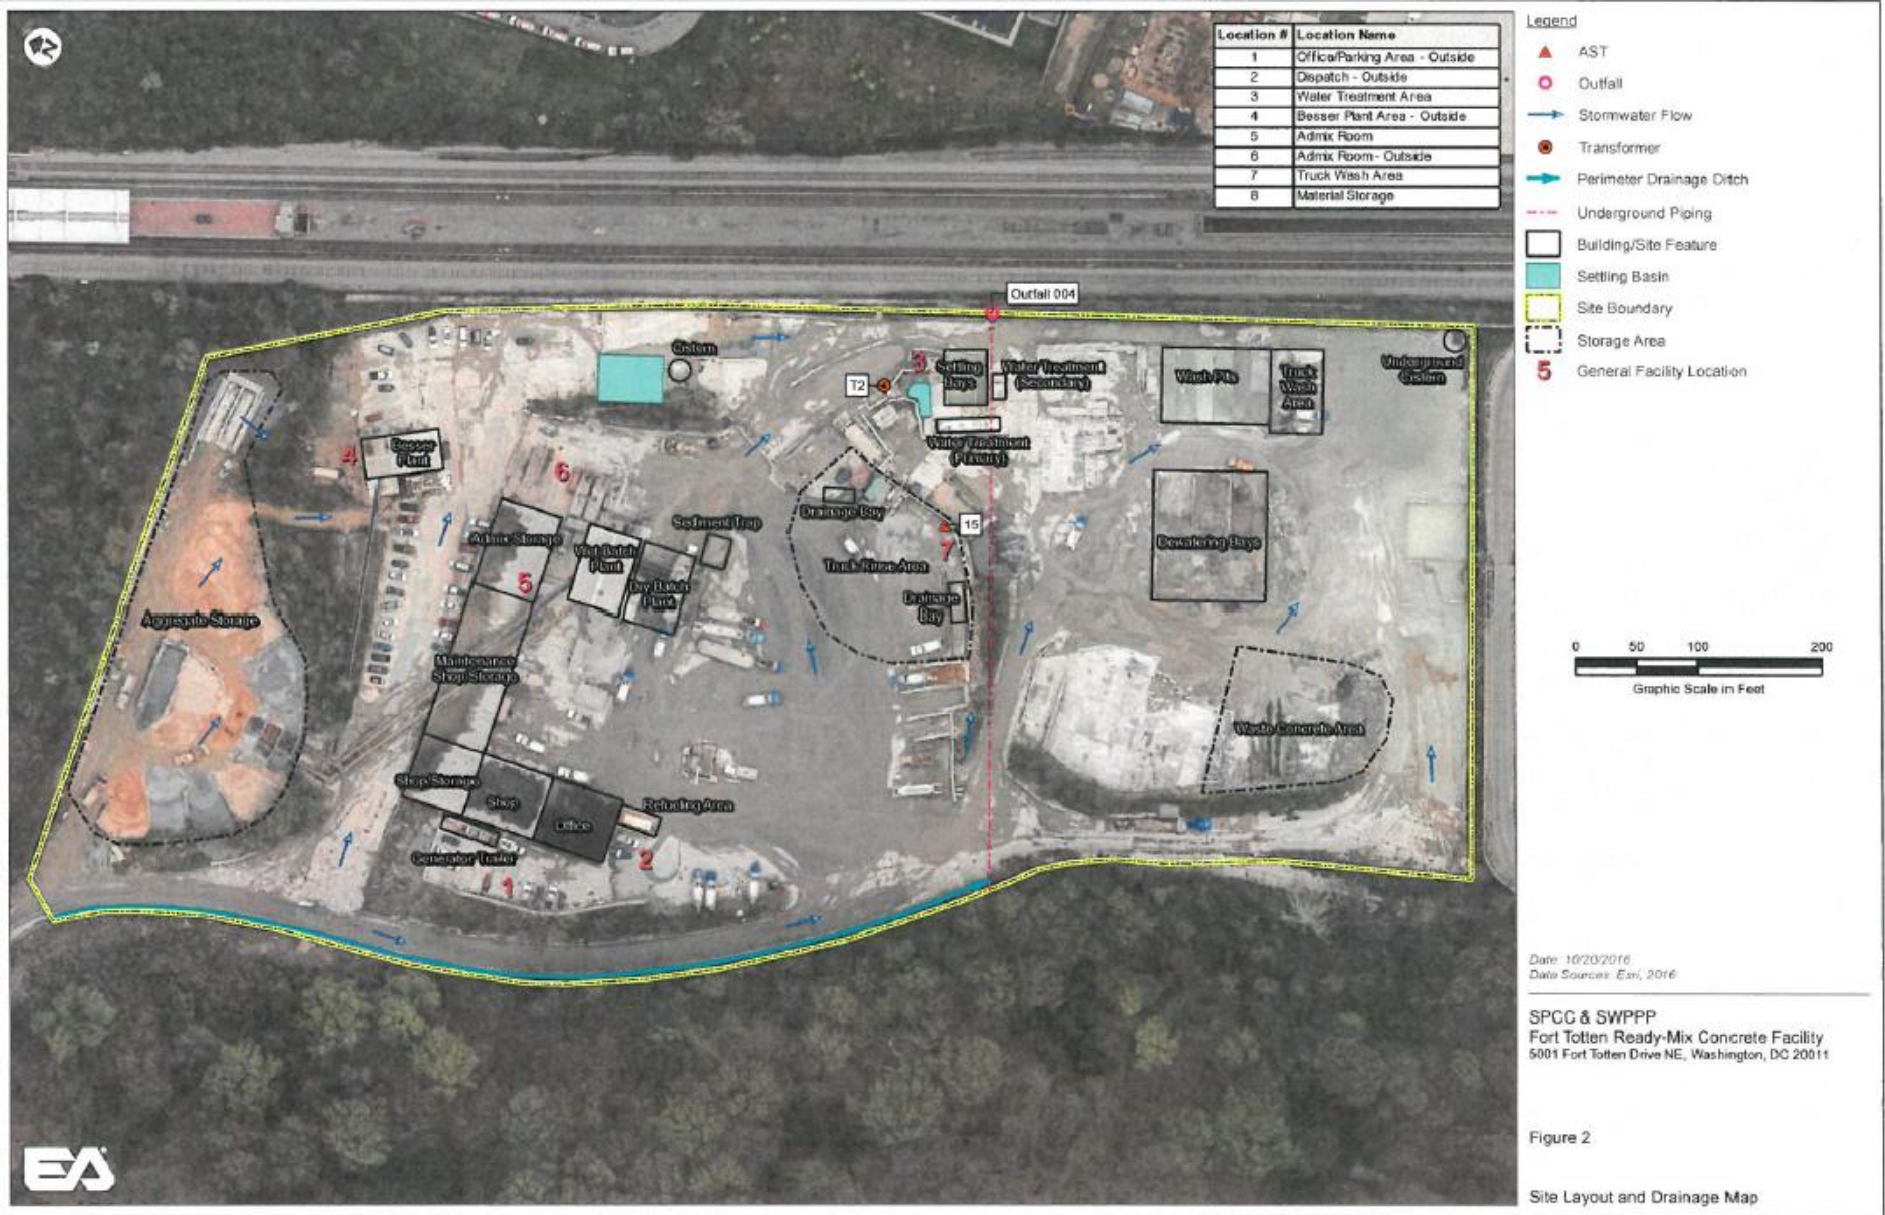

## PART I. LIMITATIONS AND MONITORING REQUIREMENTS

### Section A. Authorized Discharges

This permit authorizes the discharge of process water from truck washings and facility sweeping activities, and stormwater from stock piles, production area and paved areas. This permit does not authorize or approve discharges associated with the construction of any onshore or offshore physical structures or facilities or the undertaking of any work in any navigable waters. Samples taken in compliance with the monitoring requirements specified below shall be taken at the compliance site located at the valve before water enters a pipe which outfalls to the Northwest Branch of the Anacostia River.

### Section B. Interim Effluent Limitations and Monitoring Requirements – Outfall 004, Northwest Branch of the Anacostia River

During the period **beginning with the permit effective date lasting to 24 months past the effective date**, the permittee is authorized to discharge from Outfall 004 to the Northwest Branch of the Anacostia River subject to the Terms and Conditions of this permit, including but not limited to the effluent limitations below. As specified below, the discharge shall be monitored and sampled at the sampling port after the treatment unit. Outfall No. 004 is located at N 38° 56' 58" latitude, W 77° 00' 05" longitude.

Parameter	Discharge Limitation					Sample Frequency	Sample Type
	Mass Units (lbs/day)		Concentration Units (mg/L)				
	Average Monthly	Maximum Daily	Average Monthly	Maximum Daily			
Flow (MGD)	Report					per/discharge	Estimate
Total Suspended Solids	N/A	N/A	23.4	46.8		per/discharge	Composite
Oil and Grease	N/A	N/A	10	15		per/discharge	Grab
Biological Oxygen Demand	N/A	N/A	15	30		per/discharge	Composite
Chronic Toxicity – Pimephales promelas – Survival, Growth (TU <sub>c</sub> )	N/A	N/A	6.6	9.6		See special condition in Part III.A.2	Composite
Chronic Toxicity – Ceriodaphnia Dubia – Survival, Reproduction (TU <sub>c</sub> )	N/A	N/A	6.6	9.6		See special condition in Part III.A.2	Composite
Total Nitrogen <sup>1</sup>	N/A	N/A	Report	Report		per/discharge	Composite
Total Phosphorus <sup>1</sup>	N/A	N/A	Report	Report		per/discharge	Composite
pH (Std units)	6.0 - 8.5					per/discharge	Grab
The discharge shall be free from floating solids, sludge deposits, and debris in other than trace amounts.							

If the sampling results require the discharge to be re-circulated through the treatment system for additional treatment, another sample must be taken after the discharge leaves the treatment unit and before it enters the discharge pipe.

<sup>1</sup> If the TN and TP data show they are not consistent with the assumptions of the Bay TMDL, this permit may be modified to establish appropriate effluent limitations, schedules of compliance, or other permit conditions authorized under the CWA to ensure this discharge is consistent with the TMDL.

### Section C. Final Effluent Limitations and Monitoring Requirements – Outfall 004, Northwest Branch of the Anacostia River

During the period **beginning with 24 months from the permit effective date lasting through the expiration date**, the permittee is authorized to discharge from Outfall 004 to the Northwest Branch of the Anacostia River. As specified below, the discharge shall be monitored and sampled at the sampling port after the treatment unit. Outfall No. 004 is located at N 38° 56' 58" latitude, W 77° 00' 05" longitude.

Parameter	Discharge Limitation					
	Mass Units (lbs/day)		Concentration Units (mg/L)		Sample Frequency	Sample Type
	Average Monthly	Maximum Daily	Average Monthly	Maximum Daily		
Flow (MGD)	Report				per/discharge	Estimate
Total Suspended Solids	N/A	N/A	23.4	46.8	per/discharge	Composite
Oil and Grease	N/A	N/A	10	15	per/discharge	Grab
Biological Oxygen Demand	N/A	N/A	15	30	per/discharge	Composite
Chronic Toxicity – Pimephales promelas – Survival, Growth (TU <sub>c</sub> )	N/A	N/A	1.1	1.6	See special condition in Part III.A.2	Composite
Chronic Toxicity – Ceriodaphnia Dubia – Survival, Reproduction (TU <sub>c</sub> )	N/A	N/A	1.1	1.6	See special condition in Part III.A.2	Composite
Total Nitrogen <sup>2</sup>	N/A	N/A	Report	Report	per/discharge	Composite
Total Phosphorus <sup>2</sup>	N/A	N/A	Report	Report	per/discharge	Composite
pH (Std units)	6.0 - 8.5				per/discharge	Grab
The discharge shall be free from floating solids, sludge deposits, and debris in other than trace amounts.						

If the sampling results require the discharge to be re-circulated through the treatment system for additional treatment, another sample must be taken after the discharge leaves the treatment unit and before it enters the discharge pipe.

<sup>2</sup> If the TN and TP data show they are not consistent with the assumptions of the Bay TMDL, this permit may be modified to establish appropriate effluent limitations, schedules of compliance, or other permit conditions authorized under the CWA to ensure this discharge is consistent with the TMDL

## Section D. The Use of Sufficiently Sensitive Test Methods

In accordance with 40 C.F.R. § 122.44(i)(1)(iv), the permittee shall use sufficiently sensitive test procedures (i.e., methods) approved under 40 C.F.R. Part 136 or required under 40 C.F.R. Chapter I, Subchapter N or O, for the analysis of pollutants or pollutant parameters limited in this permit. A method is considered “sufficiently sensitive” when either: (1) the method minimum level (ML) is at or below the level of the effluent limit established in this permit for the measured pollutant or pollutant parameter; or (2) the method has the lowest ML of the analytical methods approved under 40 C.F.R. Part 136 or required under 40 C.F.R. Chapter I, Subchapter N or O for the measured pollutant or pollutant parameter. The ML is not the minimum level of detection, but rather the lowest level at which the test equipment produces a recognizable signal and acceptable calibration point for a pollutant or pollutant parameter, representative of the lowest concentration at which a pollutant or pollutant parameter can be measured with a known level of confidence. For the purposes of this permit, the detection limit is the lowest concentration that can be reliably measured within specified limits of precision and accuracy for a specific laboratory analytical method during routine laboratory operating conditions (i.e., the level above which an actual value is reported for an analyte, and the level below which an analyte is reported as non-detect).

## Section E. Special Reporting Requirements

### 1. Submittal of DMRs Using NetDMR

Beginning the effective date of the permit the permittee must submit its monitoring data in discharge monitoring reports (DMRs) to EPA **no later than the 28<sup>th</sup> day of the month following the completed monitoring period** using EPA’s NetDMR electronic reporting tool found at: (<https://netdmr.epa.gov/netdmr/public/login.htm>). The permittee must also submit analytical data sheets from any laboratory it uses through the NetDMR system as attachments to the DMR.

All reports and forms submitted in compliance with this section must be submitted electronically by the Permittee to the Director or initial recipient, as defined in 40 CFR § 127.2(b), in compliance with this section and 40 CFR Part 3 (including, in all cases, subpart D to Part 3), 40 CFR § 122.22, and 40 CFR Part 127. Part 127 is not intended to undo existing requirements for electronic reporting.

### 2. Submittal of Attachments in NetDMR

The permittee shall electronically submit any additional reports and studies to EPA as NetDMR attachments rather than as hard copies. Because the due dates for these additional submissions may not coincide with the due date for submitted DMRs (which is no later than the 28<sup>th</sup> day of the month following the completed monitoring period), reports or studies that are submitted electronically as a NetDMR attachment

shall be considered timely if it is electronically submitted to EPA with the next DMR due following the due date for any reports or studies specified in this permit.

## **PART II. STANDARD CONDITIONS**

### **Section A. General Conditions**

This permit is issued subject to all applicable federal regulations. Failure to set forth the full language of any applicable regulation or requirement below, however, does not change or waive its applicability in any way.

#### **1. Duty to Comply**

The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act (CWA) and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application.

- a. The permittee shall comply with effluent standards or prohibitions established under Section 307(a) of the CWA for toxic pollutants and with standards for sewage sludge use or disposal established under Section 405(d) of the CWA within the time provided in the regulations that establish these standards or prohibitions or standards for sewage sludge use or disposal, even if the permit has not yet been modified to incorporate the requirement.
- b. The CWA provides that any person who violates Section 301, 302, 306, 307, 308, 318, or 405 of the CWA, or any permit condition or limitation implementing any such sections in a permit issued under Section 402, or any requirement imposed in a pretreatment program approved under Sections 402 (a)(3) or 402 (b)(8) of the CWA, is subject to a civil penalty. Any person who negligently or knowingly violates such sections of the CWA or such permit requirements is subject to criminal penalties or by imprisonment, or both.
- c. Any person may be assessed an administrative penalty by the Administrator for violating Section 301, 302, 306, 307, 308, 318, or 405 of the CWA, or any permit condition or limitation implementing any of such sections in a permit issued under Section 402 of the CWA.

Note: See 40 CFR §122.41(a) for “Duty to Comply” regulations.

#### **2. Permit Actions**

This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or notification of planned change or anticipated noncompliance does not stay any permit condition. [40 CFR § 122.41(f)]



### 3. Duty to Provide Information

The permittee shall furnish to the Regional Administrator, within a reasonable time, any information which the Regional Administrator may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. The permittee shall also furnish to the Regional Administrator, upon request, copies of records required to be kept by this permit. [40 CFR § 122.41(h)]

### 4. Reopener Clause

The effluent limitations in this permit are based on the District of Columbia's water quality standards and TMDL documents prepared in accordance with the Clean Water Act and applicable regulations. In the event of a revision of the District of Columbia's water quality standards and/or the TMDLs, this permit may be modified by EPA to reflect this revision. The Regional Administrator reserves the right to make appropriate revisions to this permit in order to establish any appropriate effluent limitations, schedules of compliance, or other provisions which may be authorized under the CWA in order to bring all discharges into compliance with the CWA.

Federal regulations pertaining to permit modification, revocation and reissuance, and termination are found at 40 CFR §§ 122.62, 122.63, 122.64, and 124.5.

### 5. Oil and Hazardous Substance Liability

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from responsibilities, liabilities or penalties to which the permittee is or may be subject under Section 311 of the CWA, or Section 106 of the Comprehensive Environmental Response, Compensation and Liability Act of 1980 (CERCLA).

### 6. Property Rights

The issuance of this permit does not convey any property rights of any sort, or any exclusive privileges. [40 CFR § 122.41(g)]

### 7. Confidentiality of Information

a. In accordance with 40 CFR Part 2, any information submitted to EPA pursuant to these regulations may be claimed as confidential by the submitter. Any such claim must be asserted at the time of submission in the manner prescribed on the application form or instructions or, in the case of other submissions, by stamping the words "confidential business information" on each page containing such information. If no claim is made at the time of submission, EPA may make the information available to the public without further notice. If a claim is asserted, the information will be treated in accordance with the procedures in 40 CFR Part 2 (Public Information).

b. Claims of confidentiality for the following information will be denied:

- (1) The name and address of any permit applicant or permittee;
- (2) Permit applications, permits, and effluent data as defined in 40 CFR §2.302(a)(2).

- c. Information required by NPDES application forms provided by the Regional Administrator under 40 CFR § 122.21 may not be claimed confidential. This includes information submitted on the forms themselves and any attachments used to supply information required by the forms.

Note: See 40 CFR §122.7 for “Confidentiality of Information” regulations.

#### 8. Duty to Reapply

If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must apply for and obtain a new permit. The Permittee shall submit a new application at least 180 days before the expiration date of the existing permit, unless permission for a later date has been granted by the Regional Administrator. (The Regional Administrator shall not grant permission for applications to be submitted later than the expiration date of the existing permit.) [40 CFR § 122.41(b)]

#### 9. State Authorities

Nothing in 40 CFR Parts 122, 123, or 124 precludes more stringent State regulation of any activity covered by these regulations, whether or not under an authorized State program. [40 CFR § 122.1(a)(5)]

#### 10. Other Laws

The issuance of a permit does not authorize any injury to persons or property or invasion of other private rights, nor does it relieve the permittee of its obligation to comply with any other applicable Federal, State, or local laws and regulations. [40 CFR §122.5(c)]

### **Section B. Operation & Maintenance of Pollution Controls**

#### 1. Proper Operation and Maintenance

The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by a permittee only when the operation is necessary to achieve compliance with the conditions of the permit. [40 CFR § 122.41(e)]

#### 2. Need to Halt or Reduce Not a Defense

It shall not be a defense for a permittee in an enforcement action that it would have been

necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. [40 CFR § 122.41(c)]

### 3. Duty to Mitigate

The permittee shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment. [40 CFR § 122.41(d)]

### 4. Bypass

#### a. Definitions

- (1) *Bypass* means the intentional diversion of waste streams from any portion of a treatment facility.
- (2) *Severe property damage* means substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.

#### b. Bypass not exceeding limitations

The permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to assure efficient operation. These bypasses are not subject to the provisions of Paragraphs B.4.c. and 4.d. of this section.

#### c. Notice

- (1) Anticipated bypass. If the permittee knows in advance of the need for a bypass, it shall submit prior notice, if possible at least ten days before the date of the bypass.
- (2) Unanticipated bypass. The permittee shall submit notice of an unanticipated bypass as required in paragraph D.1.e of this part (Twenty-four hour reporting).

#### d. Prohibition of bypass

- (1) Bypass is prohibited, and the Regional Administrator may take enforcement action against a permittee for bypass, unless:
  - (A) Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;
  - (B) There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment

downtime or preventative maintenance; and  
 (C) The permittee submitted notices as required under Paragraph 4.c. of this section.

(2) The Regional Administrator may approve an anticipated bypass, after considering its adverse effects, if the Regional Administrator determines that it will meet the three conditions listed above in paragraph 4.d(1). of this section.

Note: See 40 CFR §122.41(m) “Bypass” for regulations.

5. Upset

- a. Definition. *Upset* means an exceptional incident in which there is an unintentional and temporary noncompliance with technology-based permit effluent limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
- b. Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology-based permit effluent limitations if the requirements of paragraph B.5.c. of this section are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.
- c. Conditions necessary for a demonstration of upset. A permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:
  - (1) An upset occurred and that the permittee can identify the cause(s) of the upset;
  - (2) The permitted facility was at the time being properly operated;
  - (3) The permittee submitted notice of the upset as required in paragraph D.1.e. (Twenty-four hour notice); and
  - (4) The permittee complied with any remedial measures required under B.3. above.
- d. Burden of proof. In any enforcement proceeding the permittee seeking to establish the occurrence of an upset has the burden of proof.

Note: See 40 CFR §122.41(n) “Upset” for regulations.

**Section C. Monitoring Requirements**

1. Monitoring and Records

- a. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.

- b. Except for records of monitoring information required by this permit related to the permittee's sewage sludge use and disposal activities, which shall be retained for a period of at least five years (or longer as required by 40 CFR Part 503), the permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least 3 years from the date of the sample, measurement, report or application except for the information concerning storm water discharges which must be retained for a total of 6 years. This retention period may be extended by request of the Regional Administrator at any time.
- c. Records of monitoring information shall include:
  - (1) The date, exact place, and time of sampling or measurements;
  - (2) The individual(s) who performed the sampling or measurements;
  - (3) The date(s) analyses were performed;
  - (4) The individual(s) who performed the analyses;
  - (5) The analytical techniques or methods used; and
  - (6) The results of such analyses.
- d. Monitoring results must be conducted according to test procedures approved under 40 CFR Part 136 unless another method is required under 40 CFR Subchapters N or O.
- e. The CWA provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by a fine or by imprisonment, or both.

Note: See 40 CFR §122.41(j)(5) for "Monitoring and records" regulations.

## 2. Inspection and Entry

The permittee shall allow the Regional Administrator or an authorized representative (including an authorized contractor acting as a representative of the Regional Administrator), upon presentation of credentials and other documents as may be required by law, to:

- a. Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
- b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
- c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
- d. Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the CWA, any substances or parameters at any location.

Note: See 40 CFR §122.41(i) for "Inspection and Entry" regulations.

## Section D. Reporting Requirements

### 1. Reporting Requirements

#### a. Planned Changes.

The permittee shall give notice to the Regional Administrator as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is only required when:

- (1) The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in 40 CFR § 122.29(b); or
- (2) The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants which are subject neither to effluent limitations in the permit, nor to notification requirements under 40 CFR § 122.42(a)(1).
- (3) The alteration or addition results in a significant change in the permittee's sludge use or disposal practices, and such alteration, addition or change may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan.

#### b. Anticipated noncompliance.

The permittee shall give advance notice to the Regional Administrator of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements. [40 CFR §122.41(1)(2)]

#### c. Transfers.

This permit is not transferable to any person except after notice to the Regional Administrator. The Regional Administrator may require modification or revocation and reissuance of the permit to change the name of the permittee and incorporate such other requirements as may be necessary under the CWA. (See 40 CFR § 122.61; in some cases, modification or revocation and reissuance is mandatory.)

#### d. Monitoring reports.

Monitoring results shall be reported at the intervals specified elsewhere in this permit.

- (1) Monitoring results must be reported on a Discharge Monitoring Report (DMR) or forms provided or specified by the Regional Administrator for reporting results of monitoring of sludge use or disposal practices.

- (2) If the permittee monitors any pollutant more frequently than required by the permit using test procedures approved under 40 CFR Part 136 or, another method required for an industry-specific waste stream under 40 CFR subchapters N or O, the results of the monitoring shall be included in the calculation and reporting of the data submitted in the DMR or sludge reporting form specified by the Regional Administrator.
- (3) Calculations for all limitations which require averaging or measurements shall utilize an arithmetic mean unless otherwise specified by the Regional Administrator in the permit.

e. Twenty-four hour reporting

- (1) The permittee shall report any noncompliance which may endanger health or the environment. Any information shall be provided orally within 24 hours from the time the permittee becomes aware of the circumstances.

A written submission shall also be provided within 5 days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.

- (2) The following shall be included as information which must be reported within 24 hours under this paragraph.
  - (a) Any unanticipated bypass which exceeds any effluent limitation in the permit. (See 40 CFR § 122.41(g).)
  - (b) Any upset which exceeds any effluent limitation in the permit.
  - (c) Violation of a maximum daily discharge limitation for any of the pollutants listed by the Regional Administrator in the permit to be reported within 24 hours. (See 40 CFR § 122.44(g).)
- (3) The Regional Administrator may waive the written report on a case-by-case basis for reports under Paragraph D.1.e. if the oral report has been received within 24 hours.

f. Compliance Schedules.

Reports of compliance or noncompliance with, any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than 14 days following each schedule date.

g. Other noncompliance.

The permittee shall report all instances of noncompliance not reported under Paragraphs D.1.a, D.1.d., D.1.e., and D.1.f. of this section, at the time monitoring reports are submitted. The reports shall contain the information listed in Paragraph D.1.e. of this section.

h. Other information.

Where the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Regional Administrator, it shall promptly submit such facts or information.

Note: See 40 CFR §122.41(l) for “Reporting Requirements” regulations

2. Signatory Requirement

- a. All applications, reports, or information submitted to the Regional Administrator shall be signed and certified. (See 40 CFR § 122.22)
- b. The CWA provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or noncompliance shall, upon conviction, be punished by a fine or by imprisonment, or by both.

Note: See 40 CFR 122.41(k) for complete “Signatory Requirement” regulations

3. Availability of Reports

Except for data determined to be confidential under Paragraph A.7 above, all reports prepared in accordance with the terms of this permit shall be available for public inspection at the offices of the State water pollution control agency and the Regional Administrator. As required by the CWA, effluent data shall not be considered confidential. Knowingly making any false statements on any such report may result in the imposition of criminal penalties as provided for in Section 309 of the CWA. [40 CFR § 2.302(f)]

**Section E. Definitions and Abbreviations**

*Administrator* means the Administrator of the United States Environmental Protection Agency, or an authorized representative.

*Applicable standards and limitations* means all, State, interstate, and Federal standards and limitations to which a “discharge”, a “sewage sludge use or disposal practice”, or a related activity is subject to, including “effluent limitations”, water quality standards, standards of performance, toxic effluent standards or prohibitions, “best management practices”, pretreatment standards, and “standards for sewage sludge use and disposal” under Sections 301, 302, 303, 304, 306, 307, 308, 403, and 405 of the CWA.



*Application* means the EPA standard national forms for applying for a permit, including any additions, revisions, or modifications to the forms; or forms approved by EPA for use in “authorized States”, including any approved modifications or revisions.

*Average* means the arithmetic mean of values taken at the frequency required for each parameter over the specified period. For total and/or fecal coliforms and *Escherichia coli*, the average shall be the geometric mean.

*Average monthly discharge limitation* means the highest allowable average of “daily discharges” over a calendar month calculated as the sum of all “daily discharges” measured during a calendar month divided by the number of “daily discharges” measured during that month.

*Best Management Practices (BMPs)* means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the pollution of “waters of the United States.” BMPs also include treatment requirements, operating procedures, and practices to control plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

*Best Professional Judgment (BPJ)* means a case-by-case determination of Best Practicable Treatment (BPT), Best Available Treatment (BAT), or other appropriate technology-based standard based on an evaluation of the available technology to achieve a particular pollutant reduction and other factors set forth in 40 CFR §125.3 (d).

*Composite Sample* means a sample consisting of a minimum of eight grab samples of equal volume collected at equal intervals during a 24-hour period (or lesser period as specified in the section on Monitoring and Reporting) and combined proportional to flow, or a sample consisting of the same number of grab samples, or greater, collected proportionally to flow over that same time period.

*Construction activities* – the following definitions apply to construction activities:

- (a) *Commencement of construction* is the initial disturbance of soils associated with clearing, grading, or excavating activities or other construction activities.
- (b) *Dedicated portable asphalt plant* is a portable asphalt plant located on or contiguous to a construction site and that provides asphalt only to the construction site that the plant is located on or adjacent to. The term portable asphalt plant does not include facilities that are subject to the asphalt emulsion effluent limitation guideline at 40 CFR Part 443.
- (c) *Dedicated portable concrete plant* is a portable concrete plant located on or contiguous to a construction site and that provides concrete only to the construction site that the plant is located on or adjacent to.
- (d) *Final stabilization* means that all soil disturbing activities at the site have been complete, and that a uniform perennial vegetative cover with a density of 70% of the cover for unpaved areas and areas not covered by permanent structures has been established or equivalent permanent stabilization measures (such as the use of riprap, gabions, or geotextiles) have been employed.
- (e) *Runoff coefficient* means the fraction of total rainfall that will appear at the conveyance as runoff.

*Contiguous zone* means the entire zone established by the United States under Article 24 of the Convention on the Territorial Sea and the Contiguous Zone.

*Continuous discharge* means a “discharge” which occurs without interruption throughout the operating hours of the facility except for infrequent shutdowns for maintenance, process changes, or similar activities.

*CWA* means the Clean Water Act (formerly referred to as the Federal Water Pollution Control Act or Federal Water Pollution Control Act Amendments of 1972) Pub. L. 92-500, as amended by Pub. L. 95-217, Pub. L. 95-576, Pub. L. 96-483, and Pub. L. 97-117; 33 USC §§1251 et seq.

*Daily Discharge* means the discharge of a pollutant measured during the calendar day or any other 24-hour period that reasonably represents the calendar day for purposes of sampling. For pollutants with limitations expressed in units of mass, the “daily discharge” is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurements, the “daily discharge” is calculated as the average measurement of the pollutant over the day.

*Director* normally means the person authorized to sign NPDES permits by EPA or the State or an authorized representative. Conversely, it also could mean the Regional Administrator or the State Director as the context requires.

*Discharge Monitoring Report Form (DMR)* means the EPA standard national form, including any subsequent additions, revisions, or modifications for the reporting of self-monitoring results by permittees. DMRs must be used by “authorized States” as well as by EPA. EPA will supply DMRs to any authorized State upon request. The EPA national forms may be modified to substitute the State Agency name, address, logo, and other similar information, as appropriate, in place of EPA’s.

*Discharge of a pollutant* means:

- (a) Any addition of any “pollutant” or combination of pollutants to “waters of the United States” from any “point source”, or
- (b) Any addition of any pollutant or combination of pollutants to the waters of the “contiguous zone” or the ocean from any point source other than a vessel or other floating craft which is being used as a means of transportation (See “Point Source” definition).

This definition includes additions of pollutants into waters of the United States from: surface runoff which is collected or channeled by man; discharges through pipes, sewers, or other conveyances owned by a State, municipality, or other person which do not lead to a treatment works; and discharges through pipes, sewers, or other conveyances leading into privately owned treatment works.

This term does not include an addition of pollutants by any “indirect discharger.”

*Effluent limitation* means any restriction imposed by the Regional Administrator on quantities, discharge rates, and concentrations of “pollutants” which are “discharged” from “point sources” into “waters of the United States”, the waters of the “contiguous zone”, or the ocean.

*Effluent limitation guidelines* means a regulation published by the Administrator under Section 304(b) of CWA to adopt or revise “effluent limitations”.

*EPA* means the United States Environmental Protection Agency.

*Grab Sample* – An individual sample collected in a period of less than 15 minutes.

*Hazardous Substance* means any substance designated under 40 CFR Part 116 pursuant to Section 311 of the CWA.

*Maximum daily discharge limitation* means the highest allowable “daily discharge” concentration that occurs only during a normal day (24-hour duration).

*Municipality* means a city, town, borough, county, parish, district, association, or other public body created by or under State law and having jurisdiction over disposal of sewage, industrial wastes, or other wastes, or an Indian tribe or an authorized Indian tribe organization, or a designated and approved management agency under Section 208 of the CWA.

*National Pollutant Discharge Elimination System (NPDES)* means the national program for issuing, modifying, revoking and reissuing, terminating, monitoring and enforcing permits, and imposing and enforcing pretreatment requirements, under Sections 307, 318, 402, and 405 of the CWA. The term includes an “authorized program”.

*Owner or operator* means the owner or operator of any “facility or activity” subject to regulation under the NPDES programs.

*Pass through* means a “discharge” which exits the POTW into waters of the United States in quantities or concentrations which, alone or in conjunction with a discharge or discharges from other sources, is a cause of a violation of any requirement of the POTW’s NPDES permit (including an increase in the magnitude or duration of a violation).

*Permit* means an authorization, license, or equivalent control document issued by EPA or an “authorized” State.

*Person* means an individual, association, partnership, corporation, municipality, State or Federal agency, or an agent or employee thereof.

*Point Source* means any discernible, confined, and discrete conveyance, including but not limited to any pipe ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, vessel, or other floating craft, from which pollutants are or may be discharged. This term does not include return flows from irrigated agriculture or agricultural storm water runoff (see 40 CFR §122.2).

*Pollutant* means dredged spoil, solid waste, incinerator residue, filter backwash, sewage, garbage, sewage sludge, munitions, chemical wastes, biological materials, radioactive materials (except those regulated under the Atomic Energy Act of 1954, as amended (42 U.S.C. §§2011 et seq.)), heat, wrecked or discarded equipment, rock, sand, cellar dirt and industrial, municipal, and agricultural waste discharged into water. It does not mean:

- (a) Sewage from vessels; or
- (b) Water, gas, or other material which is injected into a well to facilitate production of oil or gas, or water derived in association with oil and gas production and disposed of in a well, if the well is used either to facilitate production or for disposal purposes is approved by the authority of the State in which the well is located, and if the State determines that the injection or disposal will not result in the degradation of ground or surface water resources.

*Process wastewater* means any water which, during manufacturing or processing, comes into direct contact with or results from the production or use of any raw material, intermediate product, finished product, byproduct, or waste product.

*Regional Administrator* means the Regional Administrator, EPA, Region 3, Philadelphia, Pennsylvania.

*Significant spills* include, but is not limited to, releases of oil or hazardous substances in excess of reportable quantities under Section 311 of the CWA (see 40 CFR §110.10 and §117.21) or Section 102 of CERCLA (see 40 CFR § 302.4).

*State* means any of the 50 States, the District of Columbia, Guam, the Commonwealth of Puerto Rico, the Virgin Islands, American Samoa, the Trust Territory of the Pacific Islands.

*Stormwater* means storm water runoff, snow melt runoff, and surface runoff and drainage.

*Stormwater discharge associated with industrial activity* means the discharge from any conveyance which is used for collecting and conveying stormwater and which is directly related to manufacturing, processing, or raw materials storage areas at an industrial plant. (See 40 CFR § 122.26 (b) (14) for specifics of this definition).

*Time-weighted composite* means a composite sample consisting of a mixture of equal volume aliquots collected at a constant time interval.

*Toxic pollutants* mean any pollutant listed as toxic under Section 307 (a)(1) or, in the case of “sludge use or disposal practices” any pollutant identified in regulations implementing Section 405(d) of the CWA.

*Runoff* is rainwater, leachate, or other liquid that drains overland on any part of a land surface and runs off the land surface.

*State* is one of the United States of America, the District of Columbia, the Commonwealth of Puerto Rico, the Virgin Islands, Guam, American Samoa, the Trust Territory of the Pacific Islands, the Commonwealth of the Northern Mariana Islands, and an Indian tribe eligible for treatment as a State pursuant to regulations promulgated under the authority of section 518(e) of the CWA.

## **Section F. Commonly Used Abbreviations**

AML	average monthly limit
CFR	code of federal regulations
CFS	cubic feet per second
CV	coefficient of variation
DO	dissolved oxygen
EC	effects concentration
kg/day	kilograms per day
IC	inhibition concentration
lbs/day	pounds per day
IWC	instream waste concentration
MDL	maximum daily limit
mg/L or mg/l	milligram(s) per liter
ml/L or ml/l	milliliters per liter
MGD	million gallons per day
N/A	means not applicable
NELAP	National Environmental Laboratory Accreditation Program
O&G	oil and grease
PCB	polychlorinated biphenyl
pH	a measure of hydrogen ion concentration. A measure of acidity or alkalinity of a liquid or material
PMSD	percent minimum significant difference
RP	reasonable potential
RPA	reasonable potential analysis
RTT	reference toxicant test
°C	temperature in degrees Centigrade
°F	temperature in degrees Fahrenheit

TAC	test acceptability criteria
TBEL	technology-based effluent limit
TIE	toxicity identification evaluation
TRE	toxicity reduction evaluation
TUc	chronic toxic unit
TSD	technical support document for water-quality based toxics control
TSS	total suspended solids
µg/L or µg/l	microgram(s) per liter
WET	whole effluent toxicity
WLA	wasteload allocation
WQBEL	water-quality based effluent limit
ZID	zone of initial dilution

## **Section G. Best Management Practices**

### **1. Applicability**

These conditions apply to all permittees who use, manufacture, store, handle or discharge any pollutant listed as toxic under Section 307(a)(1) of the Clean Water Act or any pollutant listed as hazardous under Section 311 of the Act and who have ancillary manufacturing operations which could result in significant amounts of these pollutants reaching waters of the United States. These operations include material storage areas; plant site runoff; in-plant transfer, process and material handling areas; loading and unloading operations and sludge and waste disposal areas.

### **2. Best Management Practices Plan**

The permittee shall review and update its Best Management Practices (BMP) plan which prevents, or minimizes the potential for the release of toxic substances from ancillary activities to the waters of the United States through plant site runoff; spillage or leaks; sludge or waste disposal; or drainage from raw material storage.

### **3. Implementation**

Improvements identified pursuant to section 2 above shall be implemented as soon as possible but not later than one year after the effective date of the permit.

### **4. General Requirements**

The BMP plan shall:

1. Be documented in narrative form, and shall include any necessary plot plans, drawings or maps.
  2. Establish specific objectives for the control of toxic and hazardous pollutants
    - a. Each facility component or system shall be examined for its potential for causing a release of significant amounts of toxic or hazardous pollutants to waters of the United States due to equipment failure, improper operation, natural phenomena such as rain or snowfall, etc.
    - b. Where experience indicates a reasonable potential for equipment failure, e.g., tank overflow or leakage, natural phenomena such as rain or snowfall, etc.
  3. Establish specific best management practices to meet the objectives identified under Subparagraph 2 of this Paragraph, addressing each component or system capable of causing a release of significant amounts of toxic or hazardous pollutants to the waters of the United States.
  4. Include any special conditions established in Part III of this permit.
  5. Be reviewed by plant engineering staff and plant manager.
5. Specific Requirements

The plan shall be consistent with the general guidance contained in the publication entitled “NPDES Best Management Practices Guidance Document” and shall, at minimum, include the following baseline BMPs:

- a. BMP committee
- b. Reporting of BMP incidents
- c. Risk identification and assessments
- d. Employee training
- e. Inspections and records
- f. Preventive maintenance
- g. Good housekeeping
- h. Materials compatibility
- i. Security
- j. Materials inventory

6. Hazardous Waste Management

The permittee shall assure the proper management of solid and hazardous waste in accordance with regulations promulgated under the Solid Wastewater Disposal Act, as amended by the Resource Conservation and Recovery Act of 1978 (RCRA) (40 U.S.C. 6901 et seq.) Management practices required under RCRA regulations shall be referenced in the BMP plan.

## 7. Documentation

The permittee shall maintain a description of the BMP plan at the facility and shall make the plan available to the Director upon request.

## 8. BMP Plan Modification

The permittee shall amend the BMP plan whenever there is a change in the facility or change in the operation of the facility which materially increased the potential for the ancillary activities to result in a discharge of significant amount of hazardous or toxic pollutants.

## 9. Modification for Effectiveness

If the BMP plan proves to be ineffective in achieving the general objective of preventing the release of significant amounts of toxic or hazardous pollutants to surface waters and the specific objectives and requirements under Part II, Section G, Paragraph 4, Subparagraphs 2 and 3, of the permit and/or the BMP plan shall be subject to modification to incorporate revised BMP requirements.

# PART III. SPECIAL CONDITIONS

## Section A. Whole Effluent Toxicity (WET)

### 1. General Requirements

- a. The permittee shall conduct chronic toxicity testing in accordance with procedures outlined in EPA-821-R-02-013 *Short-term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Freshwater Organisms* (Fourth Edition) October 2002, EPA Test Methods 1000.0 and 1002.0
- b. The laboratory performing the toxicity testing must be a NELAP certified laboratory in EPA Test Method 1000.0 and 1002.0.
- c. The test shall provide a measure of the chronic toxicity as determined by the wastewater concentration which causes a 50 percent mortality and/or causes a 25 percent sublethal effect (i.e. reproductive, growth) of the organisms over the testing period. Test results will be expressed in Lethal Concentration (LC) and/or Inhibition Concentration (IC) and converted to Toxic Units (TU) for reporting purposes.
- d. Samples shall be 24-hour composite samples collected at the discharge point located at the treatment unit sampling port where compliance samples are taken. Samples shall be taken in accordance with 40 C.F.R. Part 136. Toxicity testing shall begin within 36 hours of sample collection.
- e. The permittee shall perform static renewal chronic testing of the effluent using the following dilution series: 4%, 9%, **17%**, 34%, and 68% effluent, with a control, where **17%** is the facility specific In-Stream Waste Concentration (IWC).



- f. The Limitations and Monitoring section of this permit (Part I.B.) requires monitoring for certain parameters at Outfall 004 for which chronic toxicity testing is required. These parameters shall be analyzed on samples taken on the same day as the samples used for toxicity testing, during those months the toxicity testing is required.

## 2. Test Frequency

- a. WET testing shall be conducted quarterly, beginning within 30 days of the permit effective date and continuing until four tests have been completed with passing results. Tests shall be completed within calendar quarters, i.e., one test each during the periods of January 1 – March 31, April 1 – June 30, July 1 – September 30, and October 1 – December 31.
- b. If no endpoint failures occur in the initial four quarterly tests, the permittee may reduce WET monitoring to semi-annually during the period January 1 – December 31 with the approval of the permitting agency. This minimum WET monitoring frequency will remain in place until the permit is reissued, unless more frequent monitoring is triggered in accordance with paragraph 2.e. The permittee must continue annual WET monitoring, at a minimum, during the permit renewal review period and during any period of administrative extension of this permit.
- c. If a test failure is determined for any endpoint the permittee shall initiate a re-test for the test species with the failure, at a minimum, within 45 days of test completion. All testing endpoints, lethal and sublethal, for the species shall be evaluated in the re-test. The results shall be submitted to EPA.
- d. If a passing result is determined for all endpoints in a re-test, the permittee may resume quarterly or annual monitoring, as applicable.
- e. If there is a failure for one or more endpoints in a re-test, the permittee shall initiate or continue quarterly WET testing for both species until there are four consecutive passing results for all endpoints. The results of all tests shall be submitted to EPA.
- f. In addition, if there is confirmed toxicity the permittee shall initiate a Phase I Toxicity Reduction Evaluation (TRE) as specified in Part III.A.5.a, below.

3. Toxicity Testing

- a. The permittee shall conduct and report chronic toxicity testing in accordance with procedures outlined in EPA-821-R-02-013 “Short-term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Freshwater Organisms” (Fourth Edition) October 2002, EPA Test Methods 1000.0 and 1002.0.
- b. The permittee shall conduct chronic toxicity tests on composite effluent samples that are representative of the daily discharge.
- c. The exact age range of the test organism at the initiation of the test shall be reported on the laboratory report.
- d. A concentration/response evaluation is required for test endpoint determination. The test report is to include documentation of this evaluation in support of the endpoint values reported (*Method Guidance and Recommendations for WET Testing. July 2000. EPA 821-B-00-004*).
- e. The test report shall include the calculation of test percent minimum significant difference (PMSD) values to determine the adequacy of test organism sensitivity. The test report shall include quality control charts from reference toxicant tests (RTTs) used to evaluate test organism sensitivity that include hypothesis, point estimates, and PMSD values from the laboratory’s previous twenty reference toxicant tests.
- f. The method Test Acceptability Criteria (TAC) must be achieved to be accepted as a valid WET test under this permit. If the test does not meet TAC the test must be repeated with fresh effluent samples within 30 days of the initial test completion date.

Test Acceptability Criteria- Chronic WET Test EPA-821-R-02-013 <i>Short-term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Freshwater Organisms</i> ” (Fourth Edition) October 2002	
Ceriodaphnia dubia	Pimephales promelas
≥ 80% survival of all control organisms	≥ 80% survival in control treatment
Average of 15 or more neonates per surviving control female	Average dry weight of surviving control organism must be ≥0.25 mg
≥ 60% of surviving control females must have produced 3 broods	

4. Toxicity Reporting Requirements

- a. The permittee must report the results of each test endpoint that has a WET limit in Part I of this permit on the Discharge Monitoring Report (DMR). Test results shall be reported on the DMR in Toxicity Units (TUC) for chronic tests.

- b. When the effluent demonstrates no toxicity at 100% effluent (no observed effect), the permittee may report zero TU rather than a TU  $\leq 1.0$ .

- c. WET Permit Limits

The WET permit limits are 9.6 TUC maximum daily or 6.6 TUC average monthly. Toxicity test results shall be submitted with the corresponding monthly DMR. The lab data sheets shall be submitted with the DMRs as attachments (see Part I.C.2).

## 5. Toxicity Reduction Evaluation (TRE)

- a. The TRE is triggered when one WET endpoint failure followed by a re-test confirms the toxicity for the same species. When the TRE process is triggered, Phase I of the TRE begins and quarterly WET testing shall be initiated for both species. The Phase I TRE may include a Toxicity Identification Evaluation (TIE) if the permittee cannot immediately identify the possible causes of the effluent toxicity and the possible sources of the causative agents.
- b. The permittee shall, within one year following the TRE trigger, submit a TRE report to EPA. The TRE shall be conducted in accordance with EPA's guidance, *Generalized Methodology for Conducting Industrial Toxicity Reduction Evaluations* (EPA/600/2-88/070) and other relevant EPA guidance, as applicable. If a TIE is conducted as part of the TRE, it shall conform to EPA's guidance, *Methods for Aquatic Toxicity Identification Evaluations Phase I* (EPA/600/6-91/003), *Phase II* (EPA/600/R-92/080), *Phase III* (EPA/600/R-92/081) and other relevant EPA guidance. The TRE report shall include all activities undertaken to identify the cause(s) and source(s) of toxicity and any control efforts.
- c. If all four quarterly WET tests produce passing results for all endpoints during the Phase I TRE process, performance of a Phase II TRE is not required, and annual WET testing in accordance with paragraph 2.b may be initiated or resumed.
- d. If the four WET tests produce at least one failing result during the Phase I TRE process, the permittee shall continue quarterly WET monitoring for both species and initiate a Phase II and Phase III TRE. In this case, the Phase I TRE must include a schedule for completion of the Phase II and Phase III TRE. The schedule must include interim milestones and a final completion date not to exceed two years from the initiation of the Phase II TRE. The permittee shall implement the Phase II TRE in accordance with the schedule unless EPA issues written approval to modify the schedule or cease performance of the Phase II and/or III TRE.
- e. Re-tests during the TRE process are required for invalid tests but are optional and at the discretion of the permittee for valid tests. The results of all tests must be submitted to the EPA.

## Section B. Additional Monitoring Requirements

When more than one type of monitoring for the same pollutant applies (e.g. monitoring for a TMDL pollutant and a pollutant listed in 40 C.F.R. Part 122 Appendix J), the permittee may use a single sample to satisfy both monitoring requirements.

### 1. TMDL Pollutant Monitoring Requirements

To ensure consistency with the assumptions and requirements of the Anacostia River TMDLs for organics and metals, the permittee shall submit quarterly sampling results to EPA for the TMDL parameters listed below. The sampling must occur such that the preceding thirty (30) day period is within normal precipitation range. The data shall be submitted with the DMRs in accordance with Part I.E.1 of the permit. In accordance with 40 C.F.R. § 122.44(i)(1)(iv) the permittee shall use sufficiently sensitive test methods approved under 40 C.F.R. Part 136 for the analysis of pollutants. The results shall be submitted to EPA in accordance with the reporting requirements under Part I Section I of this permit.

Arsenic	DDE
Total Copper	DDT
Lead	Dieldrin
Zinc	Total Heptachlor Epoxide
Chlordane	Total PAH
DDD	Total PCBs

### 2. TMDL Source Pollutant Source Tracking

If any of the pollutants listed in Part III.B.1 above are shown to be at or above the District's most stringent water quality standard for that pollutant, the permittee must take measures to determine the source of the pollutant and enact controls to reduce levels to below the most stringent water quality standard. The permittee must sample for that pollutant each time a discharge occurs until the sampling results show concentrations are below the most stringent water quality standard.

### 3. Reopener

In accordance with 40 CFR Part 122.44(d), the permit may be reopened and modified during the life of the permit if relevant portions of the District of Columbia's Water Quality Standards are revised, and/or EPA's approval of one or more of the TMDLs for the pollutants identified in Paragraph III.B.1 is vacated, and/or one or more of the TMDLs for the pollutants identified in Paragraph III.B.1 is withdrawn, replaced or superseded.

#### 4. Application Requirements for next permit reissuance

Within 180 days of the expiration date of this permit, the permittee shall submit sampling results for WET as outlined in Part III.A.1 of this permit and all TMDL pollutants as outlined in Part III.B.1 of this permit. The results may be submitted in conjunction with the permit application at the next permit reissuance or in accordance with the reporting requirements under Part I Section I of this permit. The samples shall be collected and tested in accordance with 40 C.F.R. Part 136. In accordance with 40 C.F.R. § 122.44(i)(1)(iv) the permittee shall use sufficiently sensitive test methods approved under 40 C.F.R. Part 136 for the analysis of pollutants.

#### 5. Water Quality Modeling Study

At any time, the permittee can submit to EPA a modeling study to quantify the dilution of the discharge at Outfall 004 to the receiving stream. The purpose of the modeling study is to get a better understanding of how the effluent and receiving water mix under critical conditions so a maximum dilution allowance or mixing zone based on the District's regulations can be established. The modeling study shall include, but is not limited to, a bathymetry survey and water modeling of the receiving stream, a plume mapping survey, and any other information required to meet the District's mixing zone regulations in Chapter 21-1105.7.

#### 6. Additional Notifications

The permittee shall notify EPA prior to making changes the treatment system, including changes to the flocculent and chemicals added for pH adjustment.

### **Section C. Considerations under Federal Law [40 CFR §122.49]**

#### 1. Endangered Species

Per the requirements under Section 7 of the Endangered Species Act (50 C.F.R. Part 402; 16 U.S.C. § 1536(c)) EPA has made "no effect" determination for this discharge. A "no effect" determination means there will be no direct or indirect effects to listed species or critical habitat from this proposed action.

#### 2. National Historic Preservation Act of 1966

The National Historic Preservation Act of 1966, and implementing regulations (36 C.F.R. Part 800) requires federal agencies to take into account the effects of their undertakings on historic properties and afford the Advisory Council on Historic Preservation, or designee, the opportunity to comment on such undertakings. See Section 106, 54 U.S.C. § 306108. EPA notified the District of Columbia State Historic Preservation Office (DC SHPO) that it is proposing to reissue NPDES permit no. DC0000175 and that EPA has determined that this permit does not have the potential to affect historic properties. See 36 C.F.R § 800.3(1).

**Section D. Clean Water Act Section 401 Water Quality Certification**

Pursuant to Clean Water Act Section 401, a federal agency may not issue a license or permit to conduct any activity that may result in any discharge into waters of the United States, unless the State or authorized Tribe where the discharge would originate either issues a Clean Water Act Section 401 water quality certification or certification is waived. The Government of the District of Columbia (the District) issued a water quality certification of this permit via the District's Department of Energy and Environment under Section 401(a) of the Clean Water Act and 40 C.F.R §124.53. The District has certified that the final permit is consistent with its surface water quality standards. All of the conditions contained in the District's water quality certification are hereby incorporated into this permit as follows:

1. The permittee shall allow DOEE Director or an authorized representative upon presentation of credentials and other documents as may be required by law to:
  - (i) Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
  - (ii) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
  - (iii) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
  - (vi) Sample or monitor at reasonable times, for the purposes of assuring permit compliance.
2. The permittee shall report to the Associate Director, Inspection and Enforcement Division any noncompliance which may endanger health or the environment. Any information shall be provided orally within 24 hours from the time the permittee becomes aware of the circumstances.
3. A written submission of any noncompliance shall also be provided within 5 days of the time the permittee becomes aware of the circumstances. The written report shall be submitted to:

Associate Director  
Inspection and Enforcement Division  
Department of Energy & Environment  
Government of the District of Columbia  
1200 First Street, NE, 5th floor  
Washington, DC 20002