



Ground-Water Issue

CHARACTERIZING SOILS FOR HAZARDOUS WASTE SITE ASSESSMENTS

R. P. Breckenridge¹, J. R. Williams², and J. F. Keck¹

INTRODUCTION

The Regional Superfund Ground Water Forum is a group of ground-water scientists representing EPA's Regional Offices, organized to exchange up-to-date information related to ground-water remediation at hazardous waste sites. Soil characterization at hazardous waste sites is an issue identified by the forum as a concern of CERCLA decision-makers.

To address this issue, this paper was prepared through support from EMSL-LV and RSKERL, under the direction of R. P. Breckenridge, with the support of the Superfund Technical Support Project. For further information contact Ken Brown, EMSL-LV Center Director, at FTS 545-2270 or R. P. Breckenridge at FTS 583-0757.

Site investigation and remediation under the Superfund program is performed using the CERCLA remedial investigation/feasibility study (RI/FS) process. The goal of the RI/FS process is to reach a Record of Decision (ROD) in a timely manner. Soil characteriza-

tion provides data types required for decision making in three distinct RI/FS tasks:

1. Determination of the nature and extent of soil contamination.
2. Risk assessment, and determination of risk-based soil clean-up levels.
3. Determination of the potential effectiveness of soil remediation alternatives.

Identification of data types required for the first task, determination of the nature and extent of contamination, is relatively straight forward. The nature of contamination is related to the types of operations conducted at the site. Existing records, if available, and interviews with personnel familiar with the site history are good sources of information to help determine the types of contaminants potentially present. This information may be used to shorten the list of target analytes from the several hundred contaminants of concern in the 40 CFR Part 284 list (Date 7-1-89). Numerous guidance documents are available for planning all


¹Idaho National Engineering Laboratory, Environmental Science and Technology Group, Idaho Falls, ID 83415.

²Soil Scientist, U.S. EPA/R.S. Kerr Environmental Research Laboratory, Ada, OK 74820



Superfund Technology Support Center for Monitoring and Site Characterization, Environmental Monitoring Systems Laboratory Las Vegas, NV

Superfund Technology Support Center for Ground-Water Fate and Transport, Robert S. Kerr Environmental Research Laboratory Ada, OK

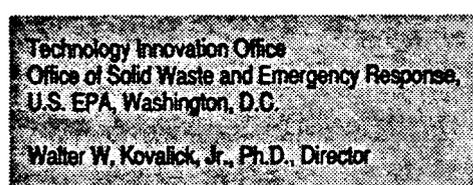

aspects of the subsequent sampling effort (US EPA 1987a, 1988a, 1988b, and Jenkins et al., 1988).

The extent of contamination is also related to the types of operations conducted at the site. Existing records, if available, and interviews with personnel familiar with the site history are also good sources of information to help determine the extent of contamination potentially present. The extent of contamination is dependent on the nature of the contaminant source(s) and the extent of contaminant migration from the source(s). Migration routes may include air, via volatilization and fugitive dust emissions; overland flow; direct discharge; leachate migration to ground water and surface runoff and erosion. Preparation of a preliminary site conceptual model is therefore an important step in planning and directing the sampling effort. The conceptual model should identify the most likely locations of contaminants in soil and the pathways through which they move.

The data type requirements for tasks 2 and 3 are frequently less well understood. Tasks 2 and 3 require knowledge of both the nature and extent of contamination, the environmental fate and transport of the contaminants, and an appreciation of the need for quality data to select a viable remedial treatment technique.

Contaminant fate and transport estimation is usually performed by computer modeling. Site-specific information about the soils in which contamination occurs, migrates, and interacts with, is required as input to a model. The accuracy of the model output is no better than the accuracy of the input information.

The purpose of this paper is to provide guidance to Remedial Project Managers (RPM) and On-Scene Coordinators (OSC) concerning soil characterization data types required for decision-making in the CERCLA RI/FS process related to risk assessment and remedial alternative evaluation for contaminated soils. Many of the problems that arise are due to a lack of understanding the data types required for tasks 2 and 3 above. This paper describes the soil characterization data types required to conduct model based risk assessment for task 2 and the selection of remedial design for task 3. The information presented in this paper is a compilation of current information from the literature and from experience combined to meet the purpose of this paper.

EMSL-Las Vegas and RSKERL-Ada convened a technical committee of experts to examine the issue and provide technical guidance based on current scientific information. Members of the committee were Joe R. Williams, RSKERL-Ada; Robert G. Baca, Robert P. Breckenridge, Alan B. Crookett and John F. Keck from the Idaho National Engineering Laboratory, Idaho Falls, ID; Gretchen L Rupp, PE, University of Nevada-Las Vegas; and Ken Brown, EMSL-LV.

This document was compiled by the authors and edited by the members of the committee and a group of peer reviewers.

Characterization of a hazardous waste site should be done using an integrated investigative approach to determine quickly and cost effectively the potential health effects and approach response measures at a site. An integrated approach involves consideration of the different types and sources of contaminants, their fate as they are transported through and are partitioned, and their impact on different parts of the environment.

Concerns

This paper addresses two concerns related to soil characterization for CERCLA remedial response. The first concern is the applicability of traditional soil declassification methods to CERCLA soil characterization. The second is the identification of soil characterization data types required for CERCLA risk assessment and analysis of remedial alternatives. These concerns are related, in that the Data Quality Objective (DQO) process addresses both. The DQO process was developed, in part, to assist CERCLA decision-makers in identifying the data types, data quality, and data quantity required to support decisions that must be made during the RI/FS process. *Data Quality Objectives for Remedial Response Activities: Development Process* (US EPA 1987b) is a guidebook on developing DQOs. This process as it relates to CERCLA soil characterization is discussed in the Data Quality Objective section of this paper.

Data types required for soil characterization must be determined early in the RI/FS process, using the DQO process. Often, the first soil data types related to risk assessment and remedial alternative selection available during a CERCLA site investigation are soil textural descriptions from the borehole logs prepared by a geologist during investigations of the nature and extent of contamination. These boreholes might include installation of ground-water monitoring wells, or soil boreholes. Typically, borehole logs contain soil lithology and textural descriptions, based on visual analysis of drill cuttings.

Preliminary site data are potentially valuable, and can provide modelers and engineers with data to begin prepare conceptual model and perform scoping calculations. Soil texture affects movement of air and water in soil, infiltration rate, porosity, water holding capacity, and other parameters. Changes in lithology identify heterogeneities in the subsurface (i.e., low permeability layers, etc.). Soil textural declassification is therefore important to contaminant fate and transport modeling, and to screening and analysis of remedial alternatives. However, unless collected properly, soil textural descriptions are of limited value for the following reasons:

1. There are several different systems for classification of soil particles with respect to size. To address this problem it is important to identify which system has been or will be used to classify a soil so that data can be properly compared. Figure 1 can be used to compare the different systems (Gee and Bauder, 1986). *Keys to Soil Taxonomy* (Soil Survey Staff, 1990) provides details to one of the more useful systems that should be consulted prior to classifying a site's soils.
2. The accuracy of the field classification is dependent on the skill of the observer. To overcome this concern RPMs and OSCs should collect soil textural data that are quantitative rather than qualitative. Soil texture can be determined from a soil sample by sieve analysis or hydrometer. These data types are superior to qualitative description based on visual analysis and are more likely to meet DQOs.
3. Even if the field person accurately classifies a soil (e.g., as a silty sand or a sandy loam), textural descriptions do not afford accurate estimations of actual physical properties required for modeling and remedial alternative evaluation,

such as hydraulic conductivity. For example, the hydraulic conductivity of silty-sand can range from 10^{-5} to 10^{-1} cm/sec (four orders of magnitude).

These ranges of values maybe used for bounding calculations, or to assist in preparation of the preliminary conceptual model. These data may therefore meet DQOs for initial screening of remedial alternatives, for example, but will likely not meet DQOs for detailed analysis of alternatives.

DATA QUALITY OBJECTIVES

EPA has developed the Data Quality Objective (DQO) process to guide CERCLA site characterization. The relationship between CERCLA RI/FS activities and the DQO process is shown in Figure 2 (US EPA 1988c, 1987a). The DQO process occurs in three stages:

• **Stage 1. Identify Decision Types.** In this stage the types of decisions that must be made during the RI/FS are identified.

The types of decisions vary throughout the RI/FS process, but in general they become increasingly quantitative as the process proceeds. During this stage it is important to identify and involve the data users (e.g. modelers, engineers, and scientists), evaluate available data, develop a conceptual site model, and specify objectives and decisions.

• **Stage 2. Identify Data Uses/Needs.** In this stage data uses are defined. This includes identification of the required data types, data quality and data quantity required to make decisions on how to:

- Perform risk assessment
- Perform contaminant fate and transport modeling
- Identify and screen remedial alternatives

• **Stage 3. Design Data Collection Program.** After Stage 1 and 2 activities has been defined and reviewed, a data collection program addressing the date types, data quantity (number of samples) and data quality required to make these decisions needs to be developed as part of a sampling and analysis plan.

Although this paper focuses on data types required for decision-making in the CERCLA RI/FS process related to soil contamination, references are provided to address date quantity quality issues.

Data Types

The OSC or RPM must determine which soil parameters are needed to make various RI/FS decisions. The types of decisions to be made therefore drive selection of data types. Data types required for RI/FS activities including risk assessment, contaminant fate and transport modeling and remedial alternative selection are discussed in Soil characteristics Data Types Required for Modeling Section, and the Soil Characterization Data Type Required for Remedial Alternative Selection Section.

Data Quality

The RPM or OSC must decide "How good does the data need to be in order for me to make a given decision?". EPA has assigned quality levels to different RI/FS activities as a guideline. *Data Quality Objectives for Remedial Response Activities* (US EPA, 1987a) offers guidance on this subject and contains many useful references.

Data Quantity

The RPM or OSC must decide "How many samples do I need to determine the mean and standard deviation of a given parameter at a given site?, or "How does a given parameter vary spatially across the site?-. Decisions of this type must be addressed by statistical design of the sampling effort. The *Soil Sampling Quality Assurance Guide* (Barth et al., 1989) and *Data Quality Objectives for Remedial Response* (US EPA, 1987a) offer guidance on this subject and contain many useful references.

		PARTICLE SIZE LIMIT CLASSIFICATION			
		USDA	CSSC	ISSS	STM (unified)
0.0002	ASTM SIEVE NUMBER OR SIZE (Openings/inch)	CLAY	FINE CLAY	COARSE CLAY	FINES (SILT AND CLAY)
0.001			COARSE CLAY		
0.002		SILT	FINE SILT	SILT	
0.003			MEDIUM SILT		
0.004			COARSE SILT		
0.006			VERY FINE SAND	FINE SAND	
0.008		VERY FINE SAND			
0.01		FINE SAND	FINE SAND		
0.02			MEDIUM SAND	MEDIUM SAND	
0.03		COARSE SAND	COARSE SAND		
0.04	VERY COARSE SAND	COARSE SAND			
0.06	FINE GRAVEL		GRAVEL	GRAVEL	
0.08					
0.1	COARSE GRAVEL	GRAVEL	GRAVEL		
0.2					
0.3	COARSE GRAVEL	GRAVEL	GRAVEL		
0.4					
0.5	COARSE GRAVEL	GRAVEL	GRAVEL		
0.8					
1.0	COARSE GRAVEL	GRAVEL	GRAVEL		
2.0					
3.0	COARSE GRAVEL	GRAVEL	GRAVEL		
4.0					
6.0	COARSE GRAVEL	GRAVEL	GRAVEL		
10					
20	COARSE GRAVEL	GRAVEL	GRAVEL		
40					
60	COARSE GRAVEL	GRAVEL	GRAVEL		
80					
100	COBBLES	COBBLES	COBBLES	COBBLES	

USDA-U.S. DEPARTMENT OF AGRICULTURE, (SOIL SURVEY STAFF, 1975)
 CCS - CANADA SOIL SURVEY COMMITTEE (McKEAGUE 1979)
 ISSS-INTERNATIONAL SOIL SCI. SOC. (YONG AND WARKENTIN, 1966)
 ASTM-AMERICAN SOCIETY FOR TESTING & MATERIALS (ASTM, D-2487, 1985a)

Figure 1. Particle size limits according to several current classification schemes (Gee and Bauder, 1986).

IMPORTANT SOIL CHARACTERISTICS IN SITE EVALUATION

Tables 1 and 2 identify methods for collecting and determining data types for soil characteristics either in the field, laboratory or by calculation. Soil characteristics in Table 1 are considered the primary indicators that are needed to complete Phase I of the RI/FS process. This is a short but concise list of soil data types that are needed to make CERCLA decisions and should be planned for and collected early in the sampling effort. These primary types should allow for the initial screening of remedial treatment alternatives and preliminary modeling of the site for risk assessment. Many of these characteristics can be obtained relatively inexpensively during periods of early field work when the necessary drilling and sampling equipment are already on site. Investigators should plan to collect data for all the soil characteristics at the same locations and times soil boring is done or install monitoring wells. Geophysical logging of the well should also be reconsidered as a cost effective method for collecting lithologic information prior to casing the well. Data quality and quantity must also be considered before beginning collection of the appropriate data types.

The soil characteristics in Table 2 are considered ancillary only because they are needed in the later stages and tasks of the DQO process and the RI/FS process. If the site budget allows, collection of these data types during early periods of field work will improve the database available to make decisions on remedial treatment selection and model-based risk assessments. Advanced planning and knowledge of the need for the ancillary soil characteristics should be factored into early site work to reduce overall costs and the time required to reach a ROD. A small additional investment to collect ancillary data during early site visits is almost always more cost effective than having to send crews back to the field to conduct additional soil sampling.

Further detailed descriptions of the soil characteristics in Tables 1 and 2 can be found in *Fundamentals of Soil Physics and Applications of Soil Physics* (Hillel, 1980) and in a series of articles by Dragun (1988, 1988a, 1988b). These references provide excellent discussions of these characteristics and their influence on water movement in soils as well as contaminant fate and transport.

SOIL CHARACTERISTICS DATA TYPES REQUIRED FOR MODELING

The information presented here is not intended as a review of all data types required for all models, instead it presents a sampling of the more appropriate models used in risk assessment and remedial design.

Uses of Vadose Zones Models for CERCLA Remedial Response Activities

Models are used in the CERCLA RI/FS process to estimate contaminant fate and transport. These estimates of contaminant behavior in the environment are subsequently used for:

- **Risk assessment.** Risk assessment includes contaminant release assessment, exposure assessment, and determining risk-based clean-up levels. Each of these activities requires estimation of the rates and extents of contaminant movement

in the vadose zone, and of transformation and degradation processes.

- **Effectiveness assessment of remedial alternatives.** This task may also require determination of the rates and extents of contaminant movement in the vadose zone, and of rates and extents of transformation and degradation processes. Technology-specific data requirements are cited in the Soil Characterization Data Type Required for Remedial Alternative selection Section.

The quantities, and quality of site characterization data required for modeling should be carefully considered during RI/FS scoping. Several currently available vadose zone fate and transport models are listed in Table 3. Soil characterization data types required for each model are included in the table. Model documentation should be consulted for specific questions concerning uses and applications.

The Superfund Exposure Assessment Manual discusses various vadose zone models (US EPA, 1988e). This document should be consulted to select codes that are EPA-approved.

Data Types Required for Modeling

Soil characterization data types required for modeling are included in Tables 1 and 2. Most of the models are one- or two-dimensional solutions to the advection dispersion equation, applied to unsaturated flow. Each is different in the extent to which transformation and degradation processes may be simulated; various contaminant release scenarios are accommodated; heterogeneous soils and other site-specific characteristics are accounted for. Each, therefore, has different data type input requirements.

All models require physicochemical data for the contaminants of concern. These data are available in the literature, and from EPA databases (US EPA, 1988c,d). The amount of physicochemical data required is generally related to the complexity of the model. The models that account for biodegradation of organics, vapor phase diffusion and other processes require more input data than the relatively simpler transport models.

Data Quality and Quantity Required for Modeling

DQOs for the modeling task should be defined during RI/FS scoping. The output of any computer model is only as valid as the quality of the input data and code itself. Variance may result from the data collection methodology or analytical process, or as a result of spatial variability in the soil characteristic being measured.

In general, the physical and chemical properties of soils vary spatially. This variation rarely follows well defined trends; rather it exhibits a stochastic (i.e., random) character. However, the stochastic character of many soil properties tends to follow classic statistical distributions. For example, properties such as bulk density and effective porosity of soils tend to be normally distributed (Campbell, 1985). Saturated hydraulic conductivity, in contrast, is often found to follow a log-normal distribution. Characterization of a site, therefore, should be performed in such a manner as to permit the determination of the statistical characteristics (i.e., mean and variance) and their spatial correlations. "

(Continued on page 8)

TABLE 1. MEASUREMENT METHODS FOR PRIMARY SOIL CHARACTERISTICS
NEEDED TO SUPPORT CERCLA DECISION-MAKING PROCESS

Soil Characteristic*	Measurement Technique/Method (w/Reference)		
	Field	Laboratory	Calculation or Lookup Method
Bulk density	Neutron probe (ASTM, 1985), Gamma radiation (Blake and Hartage, 1986, Blake, 1965).	Coring or excavation for lab analysis (Blake and Hartage, 1986).	Not applicable.
Soil ph	Measured in field in same manner as in laboratory.	Using a glass electrode in an aqueous slurry (ref. EPRI EN-6637) Analytical Method – Method 9045, SW-846, EPA.	Not applicable.
Texture	Collect composite sample for each soil type. No field methods are available, except through considerable experience of "feeling" the soil for an estimation of % sand, silt, and clay.	ASTM D 522-63 Method for Particle Analysis of Soils. Sieve analysis better at hazardous waste sites because organics can effect hydrometer analysis (Klute, 1986).	Not applicable.
Depth to ground water	Ground-water monitoring wells or piezometers using EPA approved methods (EPA 1985a).	Not applicable.	Not applicable.
Horizons or stratigraphy	Soil pits dug with backhoes are best. If safety and cost are a concern, soil bores can be collected with either a thin wall sample driver and veilmayer tube (Brown et al., 1990).	Not applicable.	May be possible to obtain information from SCS soil survey for the site.
Hydraulic conductivity (saturated)	Auger-hole and piezometer methods (Amoozeger and Warrick, 1986) and Guelph permeameter (Reynolds & Erick, 1985; Reynolds & Erick, 1986).	Constant head and falling head methods (Amoozeger and Warrick, 1986).	Although there are tables available that list the values for the saturated hydraulic conductivity, it should be understood that the values are given for specific soil textures that may not be the same as those on the site.
Water retention (soil water characteristic curves)	Field methods require a considerable amount of time, effort, and equipment. For a good discussion of these methods refer to Bruce and Luxmoore (1986).	Obtained through wetting or drainage of core samples through a series of known pressure heads from low to high or high to low, respectively (Klute, 1986).	Some look-up and estimation methods are available, however, due to high spatial variability in this characteristic they are not generally recommended unless their use is justified.
Air permeability and water content relationships	None	Several methods have been used, however, all use disturbed soil samples. For field applications the structure of soils are very important, For more information refer to Corey (1986).	Estimation methods for air permeability exist that closely resemble the estimation methods for unsaturated hydraulic conductivity. Example models those developed by Brooks and Corey (1964) and van Genuchten (1980).
Porosity (pore volume)		Gas pycnometer (Danielson and Sutherland, 1986).	Calculated from particle and bulk densities (Danielson and Sutherland, 1986).
Climate	Precipitation measured using either Sacramento gauge for accumulated value or weighing gauge or tipping bucket gauge for continuous measurement (Finkelstein et al., 1983; Kite, 1979). Soil temperature measured using thermocouple.	Not applicable.	Data are provided in the Climatic Atlas of the United States or are available from the National Climatic Data Center, Asheville, NC Telephone (704) 259-0682.

* Soil characteristics are discussed in general except where specific cases relate to different waste types (i.e., metals, hydrophobic organics or polar organics).

**TABLE 2. MEASUREMENT METHODS FOR ANCILLARY SOIL PARAMETERS
NEEDED TO SUPPORT CERCLA DECISION-MAKING PROCESS**

Soil Characteristic*	Measurement Technique/Method (w/Reference)		
	Field	Laboratory	Calculation or Lookup Method
Organic carbon	Not applicable.	High temperature combustion (either wet or dry) and oxidation techniques (Powell et al., 1989) (Powell, 1990).	Not applicable.
Capacity Exchange Capacity (CEC)	See Rhoades for field methods.	(Rhoades, 1982).	
Erodibility			Estimated using standard equations and graphs (Israelsen et al., 1980) field data for slope, field length, and cover type required as input. Soils data can be obtained from the local Soil Conservation Service (SCS) office.
Water erosion Universal Soil Loss Equation (USLE) or Revised USLE (RUSLE)	Measurement/survey of slope (in ft rise/ft run or %), length of field, vegetative cover.	Not applicable	A modified universal soil loss equation (USLE) (Williams, 1975) presented in Mills et al., (1982) and US EPA (1988d) source for equations.
Wind erosion	Air monitoring for mass of containment. Field length along prevailing wind direction.	Not applicable.	The SCS wind loss equation (Israelsen et al., 1980) must be adjusted (reduced) to account for suspended particles of diameter $\leq 10\mu\text{m}$ Cowherd et al., (1985) for a rapid evaluation (≤ 24 hr) of particle emission from a Superfund site.
Vegetative cover	Visual observation and documented using map. USDA can aid in identification of unknown vegetation.	Not applicable.	
Soil structure	Classified into 10 standard kinds – see local SCS office for assistance (Soil Survey Staff, 1990) or Taylor and Ashcroft (1972), p. 310.	Not applicable.	See local soil survey for the site.
Organic carbon partition coefficient (K_{oc})	<i>In situ</i> tracer tests (Freeze and Cherry, 1979).	(ASTM E 119547, 1938)	Calculated from K_{oc} , water solubility (Mills et al., 1985; Sims et al., 1986).
Redox couple ratios of waste/soil system	Platinum electrode used on lysimeter sample (ASTM, 1987).	Same as field.	Can be calculated from concentrations of redox pairs or O_2 (Stumm and Morgan, 1981).
Liner soil/water partition coefficient	<i>In situ</i> tracer tests (Freeze and Cherry, 1979)	Batch experiment (Ash et al., 1973); column tests (van Genuchten and Wierenga, 1986).	Mills et al., 1985.
Soil oxygen content (aeration)	O_2 by membrane electrode O_2 diffusion rate by Pt microelectrode (Phene, 1986). O_2 by field GC (Smith, 1983).	Same as field.	Calculated from pE (Stumm and Morgan, 1981) or from O_2 and soil-gas diffusion rate.

Continued)

TABLE 2. (CONTINUED)

Soil Characteristic*	Measurement Technique/Method (w/Reference)		
	Field	Laboratory	Calculation or Lookup Method
Soil temperature (as it affects volatilization)	Thermotary (Taylor and Jackson, 1986).	Same as field.	Brown and Associates (1980).
Clay mineralogy	Parent material analysis.	X-ray diffraction (Whittig and Allardice, 1986).	
Unsaturated hydraulic conductivity	Unsteady drainage-flux (or instantaneous profile) method and simulated unsteady drainage flux method (Green et al., 1986). The instantaneous profile method was initially developed as a laboratory method (Watson, 1966), however it was adapted to the field (Hillel et al., 1972). Constant-head borehole infiltration (Amoozegar and Warrick, 1986).	Not usually done; results very difficult to obtain.	A number of estimation methods exists, each with their own set of assumptions and requirements. Reviews have been presented by Mualem (1986), and van Gehuchten (in press).
Moisture content	Two types of techniques – indirect and direct. Direct methods, (i.e., gravimetric sampling), considered the most accurate, with no calibration required. However, methods are destructive to field systems. Methods involve collecting samples, weighing, drying and re-weighing to determine field moisture. Indirect methods rely on calibration (Klute, 1986).		
Soil biota	No standard method exists (see model or remedial technology for input or remedial evaluation procedures).	No standard method exists; can use agar plate count using MOSA method 99-3 p. 1462 (Klute, 1986).	

* Soil characteristics are discussed in general except where specific cases relate to different waste types (i.e., metals, hydrophobic organics or polar organics).

Significant advances have been made in understanding and describing the spatial variability of soil properties (Nielsen and Bouma, 1966). Geostatistical methods and techniques (Clark, 1962; Davis, 1966) are available for statistically characterizing soil properties important to contaminant migration. Information gained from a geostatistical analysis of data can be used for three major purposes:

- Determining the heterogeneity and complexity of the site;
- Guiding the data collection and interpretation effort and thus identifying areas where additional sampling maybe needed (to reduce uncertainty by estimating error); and
- Providing data for a stochastic modal of fluid flow and contaminant-migration.

One of the geostatistical tools useful to help in the interpolation or mapping of a site is referred to se kriging (Davis, 1966). General kriging computer codes are presently available. Application of this type of tool, however, requires an adequate

sample size. As a rule of thumb, 60 or more data points are needed to construct the semivariogram required for use in kriging. The benefit of using kriging in site characterization is that it allows one to take point measurements and estimate soil characteristics at any point within the domain of interest, such as grid points, for a computer model. Geostatistical packages are available from the US EPA, Geo-EAS and GEOPACK (Englund and Sparks, 1988 and Yates and Yates, 1990).

The use of stochastic models in hydrogeology has increased significantly in recent years. Two stochastic approaches that have been widely used are the first order uncertainty method (Dettingerand Wilson, 1981) and Monte Carlo methods (Clifton et al., 1985; Sager et al., 1986; Eslinger and Sagar, 1988). Andersson and Shapiro (1983) have compared these two approaches for the case of steady-state unsaturated flow. The Monte Carlo methods are more general and easier to implement than the first order uncertainty methods. However, the Monte Carlo method is more computationally intensive, particularly for multidimensional problems.

(Continued on page 10)

TABLE 3. SOIL CHARACTERISTICS REQUIRED FOR VADOSE ZONE MODELS

Properties and Parameters	Model Name [Reference(s)]									
	Help (A,B)	Seesoil (C,D)	Creems (E,F)	PRZM (G,H,I)	Vadsoft (H,I,J)	Minteq (J)	Fowl™ (K)	Ritz (L)	Vip (M)	Chemflo (N)
Soil bulk density	●	●	●	●	●	●	●	●	●	●
Soil pH	○	●	●	○	○	●	●	○	○	○
Soil texture	●	●	●	●	●	●	●	●	●	●
Depth to ground water	●	●	●	●	●	●	●	●	●	●
Horizons (soil layering)	●	●	●	●	●	●	●	●	●	●
Saturated hydraulic conductivity	●	●	●	●	●	●	●	●	●	●
Water retention	●	●	●	●	●	●	●	○	○	●
Air permeability	○	●	○	●	●	○	○	●	●	○
Climate (precipitation)	●	●	●	●	●	○	●	●	●	●
Soil porosity	●	●	●	●	●	●	●	●	●	●
Soil organic content	○	●	●	●	●	●	●	●	●	●
Cation Exchange Capacity (CEC)	○	●	○	○	○	●	○	○	○	○
Degradation parameters	●	●	●	●	●	○	○	●	●	●
Soil grain size distribution	○	●	●	●	●	○	○	○	○	○
Soil redox potential	○	●	●	○	○	●	○	○	○	●
Soil/water partition coefficients	○	●	●	●	●	●	●	●	●	●
Soil oxygen content	○	●	○	○	○	●	○	○	●	○
Soil temperature	●	●	●	●	●	●	●	●	●	●
Soil mineralogy	○	●	○	○	○	●	○	○	○	○
Unsaturated hydraulic conductivity	●	●	●	●	●	●	●	○	○	●
Saturated soil moisture content	●	●	●	●	●	●	●	●	●	●
Microorganism population	○	●	○	○	○	○	○	○	●	○
Soil respiration	○	●	○	○	○	○	○	○	●	○
Evaporation	●	●	●	●	●	○	○	●	●	●
Air/water contaminant densities	●	●	●	●	●	○	●	●	●	●
Air/water contaminant viscosities	●	●	●	●	●	○	●	●	●	●

REFERENCES

- A. Schroeder, et al., 1984.
 B. Schroeder, et al., 1984a.
 C. Bonazountas and Wagner, 1984.
 D. Chen, Wollman, and Liu, 1987.
 E. Leonard and Ferreira, 1984.
 F. Devaurs and Springer, 1988.
 G. Carsel et al., 1984.
 H. Dean et al., 1989.
 I. Dean et al., 1989a.
 J. Brown and Allison, 1987.
 K. Hostetler, Erickson, and Rai, 1988.
 L. Nofziger and Williams, 1988.
 M. Stevens et al., 1989.
 N. Nofziger et al., 1989.

● Required ○ Not required ● Used indirectly*
 * Used in the estimation of other required characteristics or the interpretation of the models, but not directly entered as input to models.

Application of stochastic models to hazardous waste Sites has two main advantages. First, this approach provides a rigorous way to assess the uncertainty associated with the spatial variability of soil properties. Second, the approach produces model predictions in terms of the likelihood of outcomes, i.e., probability of exceeding water quality standards. The use of models at hazardous waste sites leads to a thoughtful and objective treatment of compliance issues and concerns.

In order to obtain accurate results with models, quality data types must be used. The issue of quality and confidence in data can be partially addressed by obtaining as representative data as possible. Good quality assurance and quality control plans must be in place for not only the acquisition of samples, but also for the application of the models (van der Heijde, et al., 1989).

Specific soil characteristics vary both laterally and vertically in an undisturbed soil profile. Different soil characteristics have different variances. As an example, the sample size required to have 95 percent probability of detecting a change of 20 percent in the mean bulk density at a specific site was 6; however, for saturated hydraulic conductivity the sample size would need to be 502 (Jury, 1966). A good understanding of site soil characteristics can help the investigators understand these variations. This is especially true for most hazardous waste sites because the soils have often been disturbed, which may cause even greater variability.

An important aspect of site characterization data and models is that the modeling process is dynamic, i.e., as an increasing number of "simplifying" assumptions are needed, the complexity of the models must increase to adequately simulate the additional processes that must be included. Such simplifying assumptions might include an isotropic homogeneous medium or the presence of only one mobile phase (Waver, et al., 1969). In order to decrease the number of assumptions required, there is usually a need to increase the number of site-specific soil characteristic data types in a model (see Table 2); thus providing greater confidence in the values produced. For complex sites, an iterative process of initial data collection and evaluation leading to more data collection and evaluation until an acceptable level of confidence in the evaluation can be reached can be used.

Table 3 identifies selected unsaturated zone models and their soil characteristic needs. For specific questions regarding use and application of the model, the reader should refer to the associated manuals. Some of these models are also reviewed by Donigan and Rao (1966) and van der Heijde et al. (1966).

SOIL CHARACTERISTICS DATA TYPES REQUIRED FOR REMEDIAL ALTERNATIVE SELECTION

Remedial Alternative Selection Procedure

The CERCLA process involves the identification, screening and analysis of remedial alternatives at uncontrolled hazardous waste sites (US EPA, 1988c). During screening and analysis, decision values for process-limiting characteristics for a given remedial alternative are compared to site-specific values of those characteristics. If site-specific values are outside the range required for effective use of a particular alternative, the alternative is less likely to be selected. Site soil conditions are critical process-limiting characteristics.

Process Limiting Characteristics

Process-limiting characteristics are site- and waste-specific data types that are critical to the effectiveness and ability to implement remedial processes. Often, process-limiting characteristics are descriptors of rate-limiting steps in the overall remedial process. In some cases, limitations imposed by process-limiting characteristics can be overcome by adjustment of soil characteristics such as pH, soil moisture content, temperature and others. In other cases, the level of effort required to overcome these limitations will preclude use of a remedial process.

Decision values for process limiting characteristics are increasingly available in the literature and may be calculated for processes where design equations are known. Process limiting characteristics are identified and decision values are given for several vadose zone remedial alternatives in Table 4. For waste/site characterization, process-limiting characteristics may be broadly grouped in four categories:

1. Mass transport characteristics
2. Soil reaction characteristics
3. Contaminant properties
4. Engineering characteristics

Thorough soil characterization is required to determine site-specific values for process-limiting characteristics. Most remedial alternatives will have process-limiting characteristics in more than one category.

Mass Transport Characteristics

Mass transport is the bulk flow, or advection of fluids through soil. Mass transport characteristics are used to calculate potential rates of movement of liquids or gases through soil and include:

- Soil texture
- Unsaturated hydraulic conductivity
- Dispersivity
- Moisture content vs. soil moisture tension
- Bulk density
- Porosity
- Permeability
- Infiltration rate, stratigraphy and others.

Mass transport processes are often process-limiting for both *in situ* and extract-and-treat vadose zone remedial alternatives (Table 4). *In situ* alternatives frequently use a gas or liquid mobile phase to move reactants or nutrients through contaminated soil. Alternatively, extract-and-treat processes such as soil vapor extraction (SVE) or soil flushing use a gas or liquid mobile phase to move contaminant to a surface treatment site. For either type of process to be effective, mass transport rates must be large enough to clean up a site within a reasonable time.

Soil Reaction Characteristics

Soil reaction characteristics describe contaminant-soil interactions. Soil reactions include bio- and physiochemical reactions that occur between the contaminants and the site soil. Rates of reactions such as biodegradation, hydrolysis, sorption/desorption, precipitation/dissolution, redox reactions, acid-base reactions, and others are process-limiting characteristics for

(Continued on page 12)

**TABLE 4. SOIL CHARACTERIZATION CHARACTERISTICS REQUIRED FOR REMEDIAL TECHNOLOGY EVALUATION ,
(US EPA, 1989a,f; 1989a,b; 1990; Sims et al., 1986; Sims, 1990; Towers et al., 1989)**

Technology	Process Limiting Characteristics	Site Data Required	Technology	Process Limiting Characteristics	Site Data Required
Pretreatment/ materials handling	Large particles interfere Clayey soils or hardpan difficult to handle Wet soils difficult to handle	Particle size distribution Soil moisture content	Thermal treatment (continued)	Particle size affects feeding and residuals pH <5 and >11 causes corrosion	Particle size distribution pH
Soil vapor extraction	Applicable only to volatile organics w/significant vapor pressure >1 mm Hg Low soil permeability inhibits air movement Soil hydraulic conductivity >1E-8 cm/sec required Depth to ground water >20 ft recommended High moisture content inhibits air movement High organic matter content inhibits contaminant removal	Contaminants present Soil permeability Hydraulic conductivity Depth to ground water Soil moisture content Organic matter content	Solidification/ stabilization	Not equally effective for all contaminants Fine particles < No. 200 mesh may interfere Oil and grease >10% may interfere	Contaminants present Particle size distribution Oil and grease
<i>In situ</i> enhanced bioremediation	Applicable only to specific organics Hydraulic conductivity >1E-4 cm/sec preferred to transport nutrients Stratification should be minimal Lower permeability layers difficult to remediate Temperature 15-45°C required Moisture content 40-80% of that at -1/3 bars tension preferred pH 4.5-8.5 required Presence of microbes required Minimum 10% air-filled porosity required for aeration	Contaminants present Hydraulic conductivity Soil stratigraphy Soil stratigraphy Soil temperature Soil moisture characteristic curves Soil pH Plate count Porosity and soil moisture content	Chemical extraction (slurry reactors)	Not equally effective for all contaminants Particle size <0.25 in. pH <10	Contaminants present Particle size distribution pH
Thermal treatment	Applicable only to organics Soil moisture content affects handling and heating requirements	Contaminants present Soil moisture content	Soil washing	Not equally effective for all contaminants Silt and clay difficult to remove from wash fluid	Contaminants present Particle size distribution
			Soil flushing	Not equally effective for all contaminants Required number of pore volumes	Contaminants present Infiltration rate and porosity
			Glycolate dechlorination	Not equally effective for all contaminants Moisture content <20% Low organic matter content required	Contaminants present Moisture content Organic carbon
			Chemical oxidation/ reduction (slurry reactor)	Not equally effective for all contaminants Oxidizable organics interfere pH <2 interferes	Contaminants present Organic carbon pH
			<i>In situ</i> vitrification	Maximum moisture content of 25% by weight Particle size <4 inches Requires soil hydraulic conductivity <1E-5 cm/sec	Moisture content Particle size distribution Hydraulic conductivity

many remedial alternatives (Table 4). Soil reaction characteristics include:

- K_d , specific to the site soils and contaminants
- Cation exchange capacity (CEC)
- Eh
- pH
- Soil biota
- Soil nutrient content
- Contaminant abiotic/biological degradation rates
- soil mineralogy
- Contaminant properties, described below, and others.

Soil reaction characteristics determine the effectiveness of many remedial alternatives. For example, the ability of a soil to attenuate metals (typically described by K_d) may determine the effectiveness of an alternative that relies on capping and natural attenuation to immobilize contaminants.

Soil Contaminant Properties

Contaminant properties are critical to contaminant-soil interactions, contaminant mobility, and to the ability of treatment technologies to remove, destroy or immobilize contaminants. important contaminant properties include:

- Water volatility
- Dielectric constant
- Diffusion coefficient
- K_{oc}
- K_d
- K_H
- Molecular weight
- Vapor pressure
- Density
- Aqueous solution chemistry, and others.

Soil contaminant properties will determine the effectiveness of many treatment techniques. For example, the aqueous solution chemistry of metal contaminants often dictates the potential effectiveness of stabilization/solidification alternatives.

Soil Engineering Characteristics and Properties

Engineering characteristics and properties of the soil relate both to implementability and effectiveness of the remedial action. Examples include the ability of the treatment method to remove, destroy or immobilize contaminants; the costs and difficulties in installing slurry walls and other containment options at depths greater than 60 feet; the ability of the site to withstand vehicle traffic (trafficability); costs and difficulties in deep excavation of contaminated soil; the ability of soil to be worked for implementation of *in situ* treatment technologies (tilth); and others. Knowledge of site-specific engineering characteristics and Properties is therefore required for analysis of effectiveness and implementability of remedial alternatives. Engineering characteristics and properties include, but are not limited to:

- Trafficability
- Erodability
- Tilth
- Depth to groundwater
- Thickness of saturated zone
- Depth and total volume of contaminated soil
- Bearing capacity, and others.

SUMMARY AND CONCLUSIONS

The goal of the CERCLA RI/FS process is to reach a ROD in a timely manner. Soil characterization is critical to this goal. Soil characterization provides data for RI/FS tasks including determination of the nature and extent of contamination, risk assessment, and selection of remedial techniques.

This paper is intended to inform investigators of the data types required for RI/FS tasks, so that data may be collected as quickly, efficiently, and cost effectively as possible. This knowledge should improve the consistency of site evaluations, improve the ability of OSCs and RPMs to communicate data needs to site contractors, and aid in the overall goal of reaching a ROD in a timely manner.

REFERENCES

American Society for Testing and Materials, 1985. Density of soil and soil aggregate in place by nuclear methods (shallow depth). ASTM, Philadelphia, PA

ASTM, 1987. American Society for Testing and Materials, Standard Practice for oxidation-reduction potential of water. ASTM D1498-76. ASTM, Philadelphia, PA

ASTM, 1987. American Society for Testing and Materials. Standard Test Method for Determining a Sorption Constant (K_{oc}) for an Organic Chemical in Soil and Sediments E1195-87. Annual Book ASTM Standards, Vol. 11.02 p. 731.

Amoozegar, A. and A. W. Warrick 1986. Hydraulic Conductivity of Saturated Soils. In Klute, A. ed. *Methods of Soil Analysis Part 1: Physical and Mineralogical Methods*, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.

Andersson, J. and A. M. Shapiro, 1983. "Stochastic Analysis of One-Dimensional Steady-State Unsaturated Flow: A Comparison of Monte Carlo and Perturbation Methods," *Water Resources Research*, Vol. 19, No. 1, pp. 121-133.

Ash, S. G., R. Brown, and D. H. Everett, 1973. A high-precision apparatus for the determination of adsorption at the interface between a solid and a solution. *J. Chem. Thermodynamics* 5: 239-248.

Barth, D. S., B. J. Mason, T. H. Starks, and K. W. Brown, 1989. *Soil Sampling Quality Assurance User's Guide*. EPA 600/8-89/046, U.S. Environmental Protection Agency, Environmental Monitoring Systems Laboratory, Las Vegas, NV.

Blake, G. R., 1965. Bulk Density. In Black C. A. ed. *Methods of Soil Analysis Part 1*. Monograph 9, Part 1, Am. Soc. of Agronomy, Madison, WI.

Blake, G. R. and K. H. Hartge, 1986. Bulk Density. In Klute, A. ed. *Methods of Soil Analysis Part 1: Physical and Mineralogical Methods*, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.

- Bonazountas, M. and J. M. Wagner, 1984. *SESOIL A Seasonal Soil Compartment Model*. Contract No. 68-01-6271, Draft Report from Arthur D. Little, Inc. U.S. Environmental Protection Agency. Office of Toxic Substances, Washington, DC.
- Brady, Nyle C., 1974. *The Nature and Properties of Soils*, MacMillan publishing Co., Inc., NY.
- Brooks, R. H. and AT. Corey, 1964. Hydraulic properties of porous media", Hydrology Paper No. 3,27 pp. Colorado State University, Fort Collins, CO.
- Brown, D. S. and J. D. Allison, 1967. *MINTEQA1 Equilibrium Metal Speciation Model: A User's Manual* U.S. Environmental Protection Agency, Environmental Research Laboratory, Athens, GA
- Brown, K W. and Associates, 1980. Hazardous waste land treatment Draft edition. SW-674. U.S. Environmental Protection Agency, Cincinnati, OH.
- K. W. Brown, R. P. Breckenridge, and R. C. Rope, 1990. *U.S. Fish and Wildlife Service Contaminant Monitoring Operations Manual: Appendix J, Soil Sampling Reference Field Methods*, EGG-EST-9222, EG&G Idaho, Inc, Idaho Falls, ID.
- Bruce, R. Rand R.J. Luxmoore, 1986. Water Retention: Field Methods. In Klute, A, ed. *Methods of Soil Analysis Part 1: Physical and Mineralogical Method, 2nd edition*. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. I Publisher, Madison, WI.
- Campbell S., 1965. *Soil Physics with Basic*, Elsevier, New York, NY.
- Cereal, R. F., C. N. Smith, L A Mulkey, J. D. Dean, and P. Jowise, 1984. *Users Manual for the Pesticide Root zone Model (PRZM): Release 1*. U.S. Environmental Protection Agency, Environmental Research Laboratory, Athens, GA.
- Chen, J., S. Wollman, and J. Liu, 1987. *User's Guide to SESOIL Execution in GEMS*. GSC-TR8747. Prepared by General Sciences Corporation. U.S. Environmental Protection Agency. Office of Pesticides and Toxic Substances. Washington, DC.
- Clark L, 1982. *Practical Geostatistics, Applied Science Publishers Ltd*, London, England.
- Clifton, P. M., R. G. Baca, R. C. Arnett, 1985. "Stochastic Analysis of Groundwater Traveltimes for Long-Term Repository Performance Assessment in the Proceedings of the Materials Research Society Symposium Scientific Basis for Nuclear Waste Management, Boston, MA
- Coray, AT., 1986. Air Permeability. In Klute, A, ed. *Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition*. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.
- Cowherd, C., Mulseki, G. E., Englehart, P. J., and Gillette, D.A., 1985. PB85-192219, *Rapid assessment of exposure to particulate emissions from surface contamination sites*. Midwest Research Institute, Kansas City, MO.
- Danielson, R. E. and P. L. Sutherland, 1886. Porosity. In Klute, A. ed. *Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition*. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.
- Davis, J. C., 1986. *Statistics and Data Analysis in Geology*, Second Edition, John Wiley and Sons, New York NY.
- Dean, J. D., P. S. Huyakorn, A S. Donigian, Jr., K. A Voos, R. W. Schanz, and R. F. Cereal, 1989. *Risk of Unsaturated Saturated Transport and Transformation of Chemical Concentrations (RUSTIC): Volume 1. Theory and Code Verification*. EPA/600/3-89/046a. U.S. Environmental Protection Agency, Environmental Research Laboratory, Athena, GA
- Dettinger, M. D. and J. L Wilson, 1981. First Order Analysis of Uncertainty in Numerical Models of Groundwater Flow, Part 1, Mathematical Development, Water Resources Research, Vol. 16, No. 1, pp. 149-161.
- Devaurs, M. and E. Springer, 1986. Representing Soil Moisture in Experimental Trench Cover Designs for Waste Burial with the CREAMS Model". *Hazardous Waste and Hazardous Material*. Vol. 5, No. 4, pp. 295-312.
- Donigian, A S., Jr. and P.S. C. Rae, 1986. Overview of Terrestrial Processes and Modeling. In Hem, S. C. and S. M. Melancon. 1986. *Vadose Zone Modeling of Organic Pollutants*, Lewis Publishers, Inc., Chelsea, MI.
- Dragun, J. 1988. The Fate of Hazardous Materials in Soil (What Every Geologist and Hydrogeologist Should Know), Part 1. HMC 1(2): 30-78.
- Dragun, J. 1988a. The Fate of Hazardous Materials in Soil (What Every Geologist and Hydrogeologist Should Know), Part 2. HMC 1(3): 40-65.
- Dragun, J. 1988b. The Fate of Hazardous Materials in Soil (What Every Geologist and Hydrogeologist Should Know), Part 3. HMC 1(5): 24-43.
- Englund, E. and A Sparks, 1966. GEO-EAS (Geostatistical Environmental Assessment Software) User's Guide. EPA/600/4-88/033.
- Eslinger, P. W. and B. Sagar, 1988. EPASTAT: A Computer Model for Estimating Releases at the Accessible Environment Boundary of a High-Level Nuclear Waste Repository - Mathematical Model and Numerical Model, SD-BWI-TA-022, Rockwell Hanford Operations, Richland, WA
- Finkelstein, F.L, D. A Mozzarella, T. A Lockhart, W. J. King, and J. H. White, 1963. *Quality Assurance Handbook for Air Pollution Measurement Systems. IV: Meteorological Measurements*, EPA-600/4-62-060, Washington, DC.
- Freeze, R. A and J. A Cherry, 1979. *Groundwater*. Prentice Hall. Englewood Cliffs, NJ.

- Gardner, W. H. 1986. Water content. *In Klute, A, ed. Methods of Soil Analysis Part I: Physical and Mineralogical Methods, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America Inc. Publisher, Madison, WI.*
- Gee, G. W. and J. W. Bauder. Particle-size Analysis. *In Klute, A, ed. Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America Inc. Publisher, Madison, WI.*
- Green, R. E., L. R. Ahuja and S. K. Chong. 1986. Hydraulic Conductivity and Diffusivity of Unsaturated Soils: Field Methods. *In Klute, A, ed. Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.*
- Hillel, D., 1980. *Application of Soil Physics*, Academic Press, Inc., New York, NY.
- Hillel, D., 1980a. *Fundamentals of Soil Physics*, Academic Press, Inc., New York, NY.
- Hillel, D., V. D. Krentos, Y. Stylianou, 1972. "Procedure and Test of an Internal Drainage Method for Measuring Soil Hydraulic Characteristic *in situ*", *Soil Science* 114:395-400.
- Hostetler, C. J., R. L. Erikson, and D. Ral, 1988. *The Fossil Fuel Combustion Waste Leaching (FOWL) Code: Version 1. User's Manual* EPRI EA-57420CCM. Electric Power Research Institute. Palo Alto, CA.
- Israelsen, C. E., Clyde, C. G., Fletcher, J. E., Israelsen, E.K., Haws, F. W., Packer, P. E., and Farmer, E. E., Erosion Control During Highway Construction. Manual on Principles and Practices. Transportation Research Board, National Research Council, Washington, DC 1960.
- Jenkins, R. A, W. H. Griest, R. L. Moody, M. V. Buchanan, M. P. Maskarinec, F. F. Dyer, C. -h. Ho, 1966. *Technology Assessment of Field Portable Instrumentation for Use at Rocky Mountain Arsenal*, ORNL/TM-10542, Oak Ridge National Laboratory, Oak Ridge, TN.
- Jury, W.A, 1986. Spatial Variability of Soil Properties. *In Hem, S. C. and S. M. Melancon. Vadose Zone Modeling of Organic Pollutants*. Lewis Publishers, Inc., Chelsea, MI.
- Kite, J. W., 1979. *Guidline for the Design, Installation, and Operation of a Meteorological System*, Radian Corporation, Austin, TX.
- Klute, A. 1986. Water Retention: Laboratory Methods. *In Klute, A ad. Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.*
- Leonard, R. A, and V. A. Ferreira, 1984. "CREAMS2 - The Nutrient and Pesticide Models", Proceedings of the Natural Resources Modeling Symposium, U.S. Department of Agriculture.
- Mills, W. B., D. B. Procella, M. J. Unga, S. A. Gherini, K. V. Summers, L. Mok, G. L. Rupp, G. L. Bowie, and D. A. Haith, 1985. EPA/600/6-85-002a, *Water Quality Assessment: A screening procedure for toxic and conventional pollutants in surface and ground water. Part 1*. Tetra Tech Inc., Lafayette, CA
- Mills, W. B., Dean, J. D., Porcella, D. B., et al, 1982. Water quality assessment: a screening procedure for toxic and conventional pollutants: parts 1, 2, and 3, Athens, GA: U.S. Environmental Protection Agency. Environmental Research Laboratory. Office of Research and Development EPA-600/6-82/004 a.b.c.
- Mualem, Y. 1966. Hydraulic Conductivity of Unsaturated Soils: Prediction and Formulas. *In Klute, A. ed. Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.*
- Neilson, D. Rand J. Bouma, eds, 1985. *Soil Spatial Variability*, Center for Agricultural Publishing and Documentation, Wageningen, the Netherlands.
- Nofziger, D. L., K. Rajender, S. K. Nayudu, and P. Y. Su, 1989. *CHEMFLOW: One-Dimensional Water and Chemical Movement in Unsaturated Soils*. EPA/600/8-89/076. U. S. Environmental Protection Agency. Robert S. Kerr Environmental Research Laboratory, Ada, OK.
- Nofziger, D.L., J. R. Williams, 1988. *Interactive Simulation of the Fate of Hazardous Chemicals During Land Treatment of Oily Wastes: RITZ User's Guide*. EPA/600/8-88/001. U. S. Environmental Protection Agency. Robert S. Kerr Environmental Research Laboratory, Ada, OK.
- Phene, C. J., 1986. Oxygen electrode measurement. *In Klute, A. ed. Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.*
- Powell, R. M., Bledsoe, B. E., Johnson, R. L, and G. P. Curtis, "Interlaboratory Methods Comparison for the Total Organic Carbon Analysis of Aquifer Materials", *Environmental Science and Technology*, Vol. 23, pp. 1246-1249.
- Powell, R. M., 1990. Total Organic Carbon Determinations in Natural and contaminated Aquifer Materials, Relevance and Measurement", Proceedings of the Fourth National Outdoor Action Conference on Aquifer Restoration, Ground Water Monitoring and Geophysical Methods (National Water Well Association), May 14-17, 1990, Las Vegas, NV.
- Reynolds, W. D. and D. E. Elrick 1985. *In situ* Measurement of Field-Saturated Hydraulic Conductivity, Sorptivity and the α -Parameter using the Guelph Permeameter. *Soil Science* 140(4):292-302.
- Reynolds, W. D. and D. E. Elrick 1986. A Method for Simultaneous *in situ* Measurement in the Vadose zone of Field-Saturated Hydraulic Conductivity, Sorptivity, and the Conductivity-Pressure Head Relationship. *Ground Water Monitoring Review* 6(1):84-95.

- Rhoades, J. D., 1982. Cation Exchange Capacity. In Page, A. L., R. H. Miller, and D.R. Keeney, eds. *Methods of Soil Analysis*, Part 2, Chemical and Microbiological Properties, 2nd edition, American Society of Agronomy Monograph 9 (Part 2), Madison, WI.
- Roco, M. C., J. Khadikar, and J. Zhang, 1989. Probabilistic Approach for Transport of Contaminants Through Porous Media," *International Journal for Numerical Methods in Fluids*, Vol. 9, pp. 1431-1451.
- Sager, B., P. W. Eslinger, and R. G. Baca, 1986. "Probabilistic Modeling of Radionuclide Release at the waste Package Subsystems Boundary of a Repository in Basalt," *Nuclear Technology*, Vol. 75, pp. 338-49.
- Schroeder, P.R., J. M. Morgan, T. M. Walski, and A. C. Gibson, 1984. *Hydrologic Evaluation of Landfill Performance (HELP) Model: Volume 1. User's Guide Version 1*. EPA/530-SW-84-009, U.S. Environmental Protection Agency, Municipal Environmental Research Laboratory, Cincinnati, OH.
- Schroeder, P. R., A. C. Gibson, and M. D. Smolen, 1984. *Hydrologic Evaluation of Landfill Performance (HELP) Model: Volume II. Documentation for Version 1*. EPA/530-SW-84-010. U. S. Environmental Protection Agency, Municipal Environmental Research Laboratory, Cincinnati, OH.
- Sims, R C. 1990. Soil Remediation Techniques at Uncontrolled Hazardous Waste Sites: A Critical Review. *Journal of the Air and Waste Management Association* Vol. 40, No. 5, pp. 704-732.
- Sims, J. L, R C. Sims, and J. E Matthews, 1989. EPA/600/9-89/073, *Bioremediation of Contaminated Surface Soils*, USEPA Environmental Research Laboratory, Ada, OK.
- Sims, R. C., D. Sorenson, J. Sims, J. McLean, R. Mahmood, R. Dupont, J. Jurinak, and K. Wagner, 1988. *Contaminated Surface Soils /in-Place Treatment Techniques*. Pollution Technology Review No. 132. Noyes Publications, Park Ridge, NJ.
- Smith, K. A 1983. Gas Chromatographic analysis of the soil atmosphere. In K. A Smith (ed.) *Soil Analysis*. Instrumental techniques and related procedures. Marcel Dekker Inc. New York, NY.
- Soil Conservation Service (SCS), USDA 1951. Soil survey manual. U.S. Department of Agriculture Handbook 18, p. 228, U.S. Government Printing Office, Washington, DC.
- Soil Survey Staff, 1990. *Keys to Soil Taxonomy*. Soil Management Support Services. SMSS Technical Monograph #19, 4th edition. Virginia Polytechnic Institute, International Soils, Department of Crop and Soil Environmental Science, Blacksburg, VA
- Stevens, D. K., W. J. Grenney, Z. Yan, and R. C. Sims, 1989. *Sensitive Parameter Evaluation for a Vadose Zone Fate and Transport Model*. EPA/600.2-89/039. U. S. Environmental Protection Agency. Robert S. Kerr Environmental Research Laboratory, Ada, OK.
- Stumm, W. and J. J. Morgan *Aquatic Chemistry*. 2nd edition. Wiley-Interscience, NY.
- Taylor, S. A and G. L. Ashcroft 1972. *Physical Edaphology. The Physics of Irrigated and Nonirrigated Soils*, W. H. Freeman and Company, San Francisco, CA
- Taylor, S. A and R D. Jackson, 1888. Temperature. In Klute, A. ed. *Methods of Soil Analysis Part 1: Physical and Mineralogical Methods, 2nd edition*. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America Inc. Publisher, Madison, WI.
- Towers, D. S., M. J. Dent and D. G. Van Amam, 1988. *Evaluation of In Situ Technologies for VHOs Contaminated Soil*. In: Proceedings of the 8th National Conference on Hazardous Wastes and Hazardous Materials. Sponsored by the Hazardous Materials Control Research Institute.
- US EPA 1985a. *Practical Guide for Ground-water Sampling*, EPA 600/2-85-104, Environmental Research Laboratory, Ada, OK.
- US EPA, 1985b. *Compilation of Air Pollutant Emission Factors. Volume 1. Stationary Point and Area Sources*. Fourth Edition. Office of Research and Development. Research Triangle Park, NC.
- US EPA, 1987a *Data Quality Objectives for Remedial Response Activities* EPA/540/G-87/003 (NTIS PB88-131370), Office of Emergency and Remedial Response and Office of Waste Programs Enforcement, Washington, D.C. 20460.
- US EPA, 1987b. *Compendium of Superfund Field Operating Methods*, EPA-540 P-87:001. OSWER Directive 9355.0-14. Office of Solid Waste and Emergency Response, U.S. Environmental Protection Agency, Washington, DC.
- US EPA, 1988a. *Field Screening Methods for Hazardous Waste Site Investigations*, Proceedings from the First International Symposium, October 11-13, 1988.
- US EPA, 1988b. *Field Screening Methods Catalog. User's Guide* EPA/540/2-88/005. U.S. Environmental Protection Agency, Office of Emergency and Remedial Response, Washington, DC.
- US EPA, 1988c. *Guidance for Conducting Remedial Investigations and Feasibility Studies Under CERCLA: Interim Final*. EPA/540/G-89/004. Office of Emergency and Remedial Response, U. S. Environmental Protection Agency, Washington, DC.
- US EPA 1988d. *Superfund Exposure Assessment Manual*. EPA-540-1-88-001. OSWER Directive 9285.5-1. Office of Remedial Response, U.S. Environmental Protection Agency, Washington, DC.
- US EPA, 1988e. *Technology Screening Guide for Treatment of CERCLA Soil and Sludges*. EPA/540/2-88W2-88/004; NTIS# PB89-132674. U.S. Environmental Protection Agency, Washington, DC.

US EPA, 1988f. *Cleanup of Releases from Petroleum USTs: Selected Technologies*. EPA/530/UST-88/001. U.S. Environmental Protection Agency, Office of Underground Storage Tanks, Washington, DC 20840.

US EPA, 1989a. *Seminar on Site Characterization for Subsurface Remediations*. CERI-89-224. U.S. Environmental Protection Agency, Office of Research and Development, Washington, DC 20480.

US EPA, 1989b. *Bioremediation of Hazardous Waste Sites Workshop: Speaker Slide Copies and Supporting Information*. CERI-89-11. U.S. Environmental Protection Agency, Office of Research and Development, Washington, DC 20480.

US EPA, 1990. *Handbook on In Situ Treatment of Hazardous Waste-Contaminated Soils*. EPA/540/2-90/002. U.S. Environmental Protection Agency Risk Reduction Engineering Laboratory, Cincinnati, OH.

van der Heijde, P. K. M., A. L. El-Kadi, and S. A. Williams, 1988. *Ground Water Modeling: An Overview and Status Report*. EPA/600/2-89/028.

van der Heijde, P. K. M., W. 1. M. Elderhorst, R. A. Miller, and M. J. Trehan, 1989. *The Establishment of a Groundwater Research Data Center for Validation of Subsurface Flow and Transport Models*. EPA/600/2-89/040, July 1989.

van Genuchten (in press). *Proceedings of the International Workshop on Indirect Methods for Estimating the Hydraulic Properties of Unsaturated Soils*, Riverside, CA, October 11-13, 1989. Univ. of CA-Riverside and U.S. Department of Agriculture.

van Genuchten, M. Th. 1980. A Cloed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Sci. Soc. Am. J.* 44:892-898.

van Genuchten, M. and P.J. Wierenga, 1986. Solute dispersion coefficients and retardation factors. In Klute, A ed. *Methods of Soil Analysis Part 1: Physical and Mineralogical Methods*, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.

Watson, K. K 1988. An Instantaneous Profile Method for Determining the Hydraulic Conductivity of Unsaturated Porous Media *Water Resources Research* 2:709-715.

Weaver, J., C. G. Enfield, S. Yates, D. Kreamer, and D. White, 1989. *Predicting Subsurface Contaminant Transport and Transformation: Considerations for Model Selection and Field Validation*. EPA/600/2-89/045, August 1989.

Whittig, L. D. and W. R. Allardice, 1988. X-Ray Diffraction Techniques. In A. Klute, ad. *Methods of Soil Analysis Part 1: Physical and Mineralogical Methods*, 2nd edition. Monograph 9 (Part 1), American Society of Agronomy, Inc./Soil Science Society of America, Inc. Publisher, Madison, WI.

Williams, J. R. 1975. Sediment-yield prediction with the universal equation using runoff energy factor. In *Present and prospective technology for predicting sediment yields and sources*. ARS-S-40. U.S. Department of Agriculture.

Yates, S. R. and M. V. Yates, 1990. *Geostatistics for Waste Management: A User's Guide for the GEOPACK (Version 1.0) Geostatistical Software System*. EPA/600/8-90/004, January 1990.

United States
Environmental Protection
Agency

Center for Environmental Research
information
Cincinnati, OH 45268

BULK RATE
POSTAGE & FEES PAID
EPA PERMIT NO. G-35

Official Business
Penalty for Private Use \$300

EPA/540/4-91/003