

Directed Inspection and Maintenance and Infrared Leak Detection

Lessons Learned from Natural Gas STAR



Williams Production Company,
The Colorado Oil and Gas Association,
EnCana USA and The Independent
Petroleum Association of Mountain States

Producers Technology Transfer Workshop
Glenwood Springs, Colorado
September 11, 2007



epa.gov/gasstar

Directed Inspection and Maintenance and Infrared Leak Detection Agenda

🔥 Methane Losses

- 🔥 What are the sources of emissions?
- 🔥 How much methane is emitted?

🔥 Methane Recovery

- 🔥 Directed Inspection and Maintenance (DI&M)
- 🔥 DI&M by Infrared Leak Detection

🔥 Is Recovery Profitable?

🔥 Partner Experience

🔥 Discussion

Methane Losses

- Over 395,000 producing gas wells nationally
- Fugitive emissions from gas production and gathering/boosting facilities are estimated to be 25 billion cubic feet per year (Bcf/year)
- Estimated 63 thousand cubic feet emissions (Mcf) per well-year
 - Worth \$441/well-yr




Source: Newfield

What is the Problem?

- 🔥 Methane gas leaks are invisible, unregulated, and go unnoticed

- 🔥 Natural Gas STAR Partners find that valves, connectors, compressor seals, and open-ended lines (OELs) are major methane emission sources
 - 🔥 In 2005, 2.6 Bcf of methane was emitted as fugitives by reciprocating compressor related components alone
 - 🔥 Production fugitive methane emissions depend on operating practices, equipment age, and maintenance

Sources of Methane Emissions

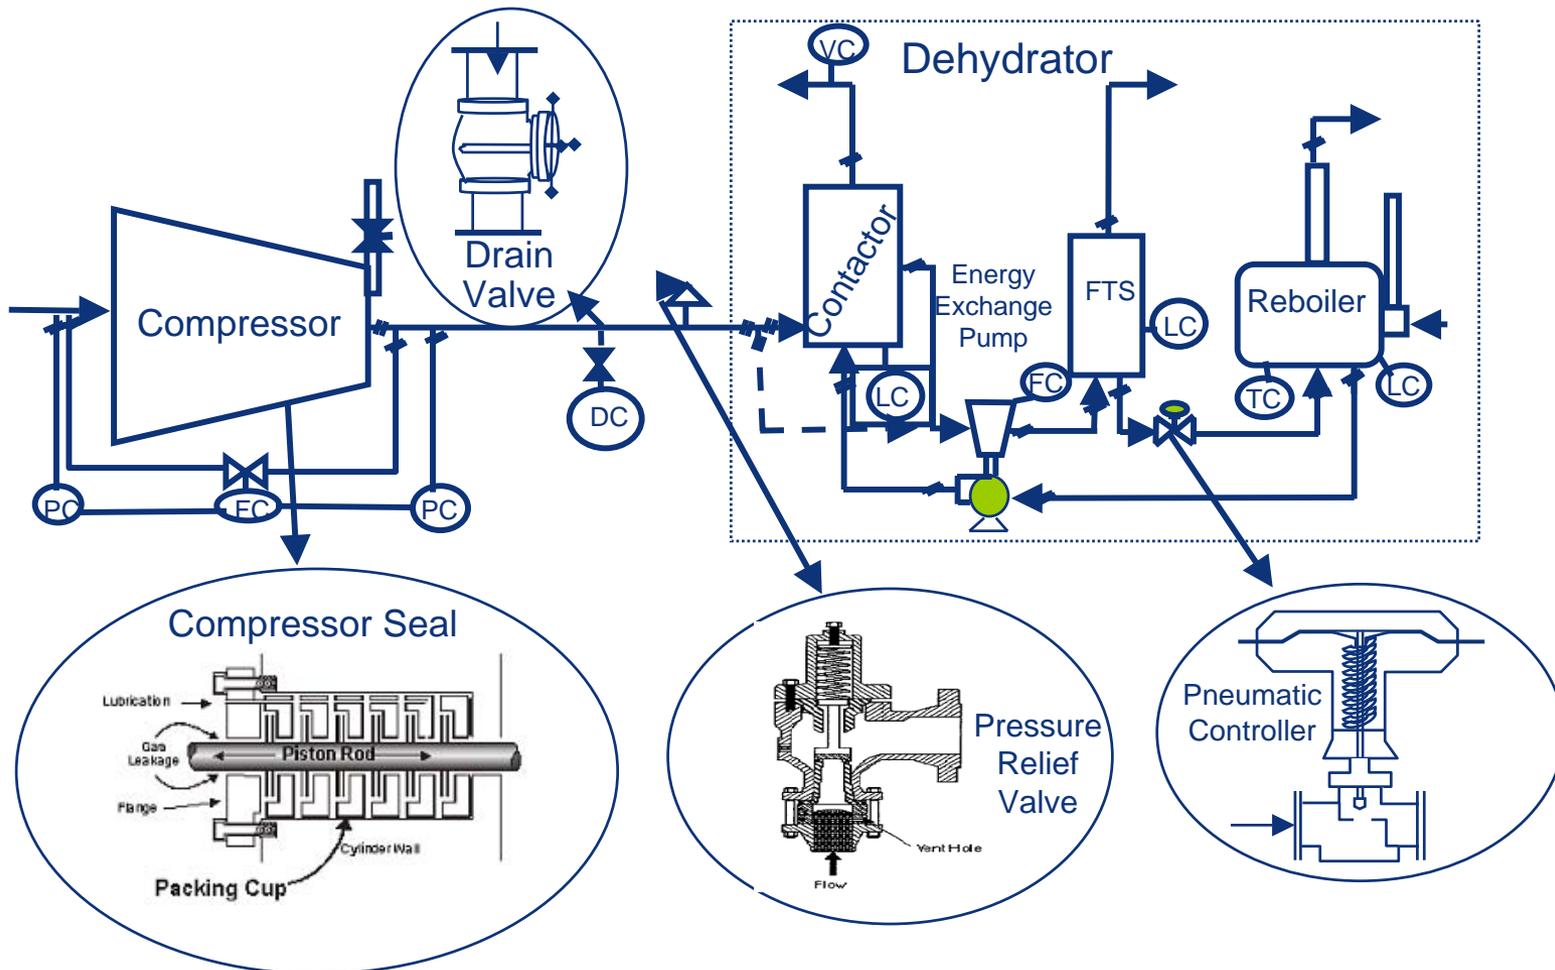


What are the losses? - Clearstone

- Clearstone studied 4 gas processing plants
 - Screened for all leaks
 - Measured larger leak rates
 - Analyzed data
- Principles are relevant to all sectors
 - Fugitive leaks from valves, connectors, compressor seals, and lines still a problem in production
 - Solution is the same




Distribution of Losses by Source Category

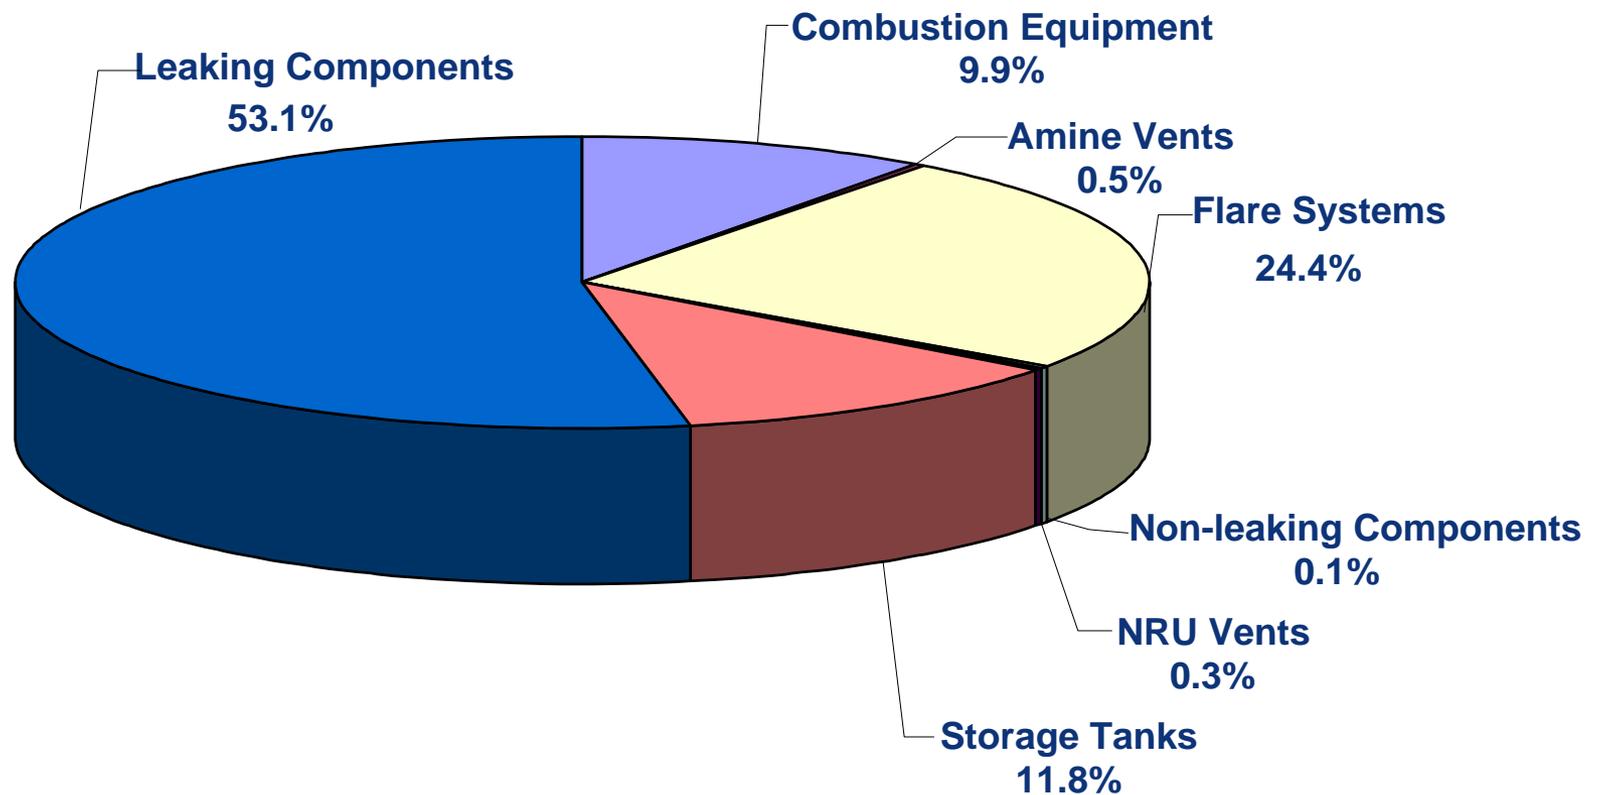

Source: Clearstone Engineering, 2002

Distribution of Losses from Equipment Leaks by Type of Component

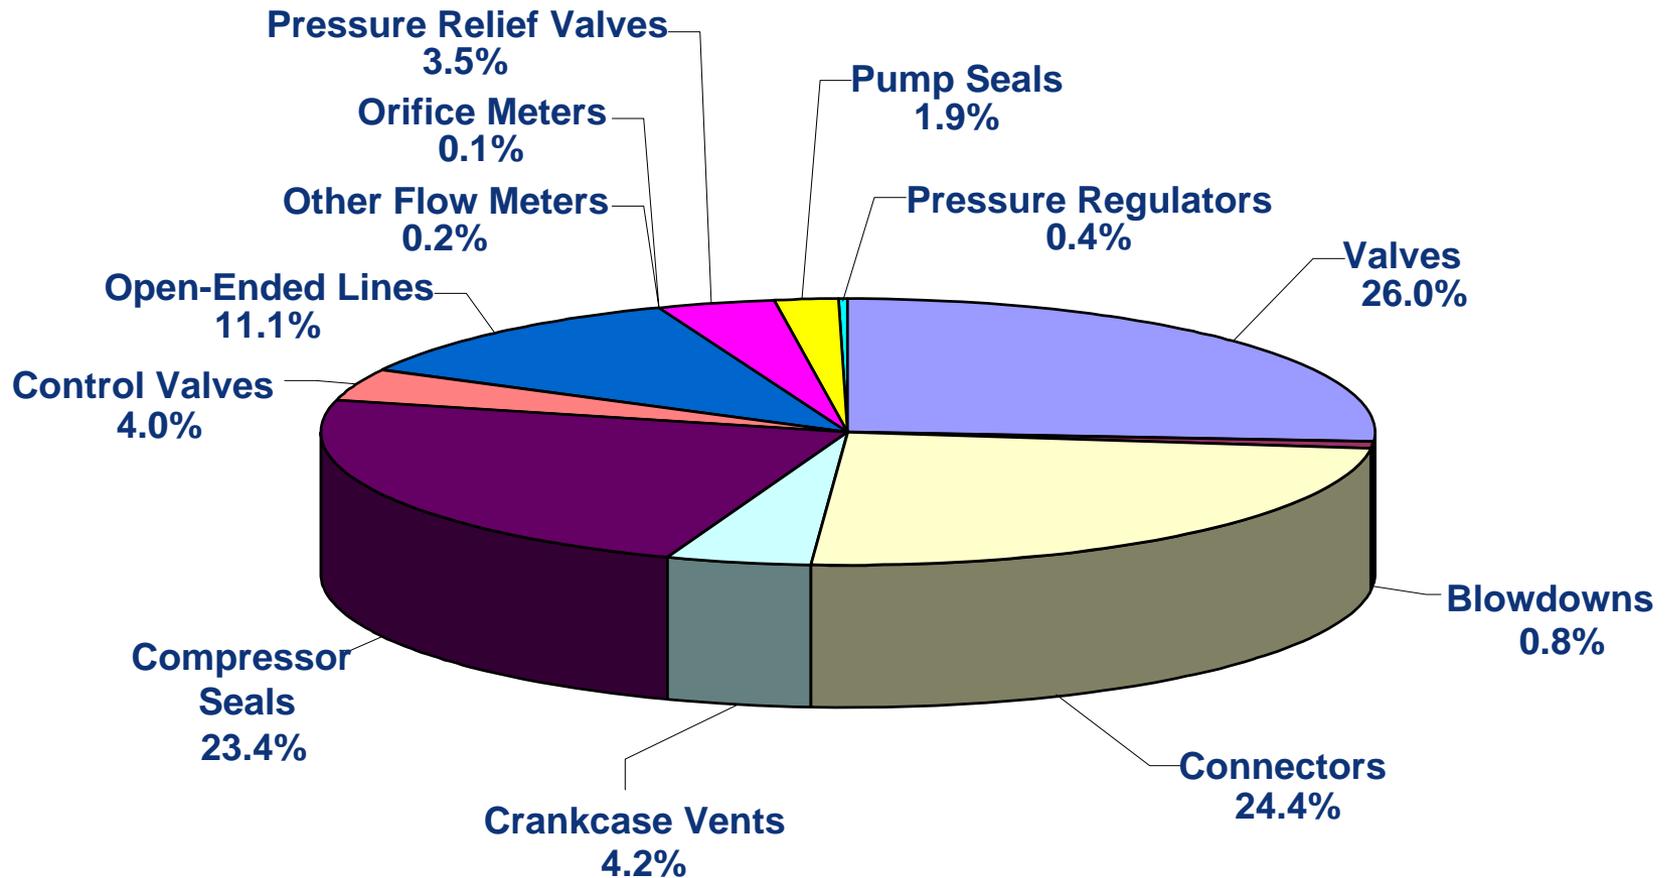

Source: Clearstone Engineering, 2002

How Much Methane is Emitted?

Methane Emissions from Leaking Components at Gas Processing Plants

Component Type	% of Total Methane Emissions	% Leak Sources	Estimated Average Methane Emissions per Leaking Component (Mcf/year)
Valves (Block & Control)	26.0%	7.4%	66
Connectors	24.4%	1.2%	80
Compressor Seals	23.4%	81.1%	372
Open-ended Lines	11.1%	10.0%	186
Pressure Relief Valves	3.5%	2.9%	844

Source: Clearstone Engineering, 2002, *Identification and Evaluation of Opportunities to Reduce Methane Losses at Four Gas Processing Plants*. Report of results from field study of four gas processing plants in Wyoming and Texas to evaluate opportunities to economically reduce methane emissions.

Mcf = Thousand cubic feet

How Much Methane is Emitted?

Summary of Natural Gas Losses from the Top Ten Leak Sources¹

Plant Number	Gas Losses From Top 10 Leak Sources (Mcf/day)	Gas Losses From All Leak Sources (Mcf/day)	Contribution By Top 10 Leak Sources (%)	Contribution By Total Leak Sources (%)
1	43.8	122.5	35.7	1.78
2	133.4	206.5	64.6	2.32
3	224.1	352.5	63.6	1.66
4	76.5	211.3	36.2	1.75
Combined	477.8	892.8	53.5	1.85

¹ – Excluding leakage into flare system

Methane Recovery

- 💧 Fugitive losses can be dramatically reduced by implementing a directed inspection and maintenance program
 - 💧 Voluntary program to identify and fix leaks that are cost-effective to repair
 - 💧 Survey cost will pay out in the first year
 - 💧 Provides valuable data on leak sources with information on where to look “next time”


What is Directed Inspection and Maintenance?

- Directed Inspection and Maintenance (DI&M)
 - Cost-effective practice, by definition
 - Find and fix significant leaks
 - Choice of leak detection technologies
 - Strictly tailored to company's needs
- DI&M is NOT the regulated volatile organic compound leak detection and repair (VOC LDAR) program



Source: Targa Resources

How Do You Implement DI&M?

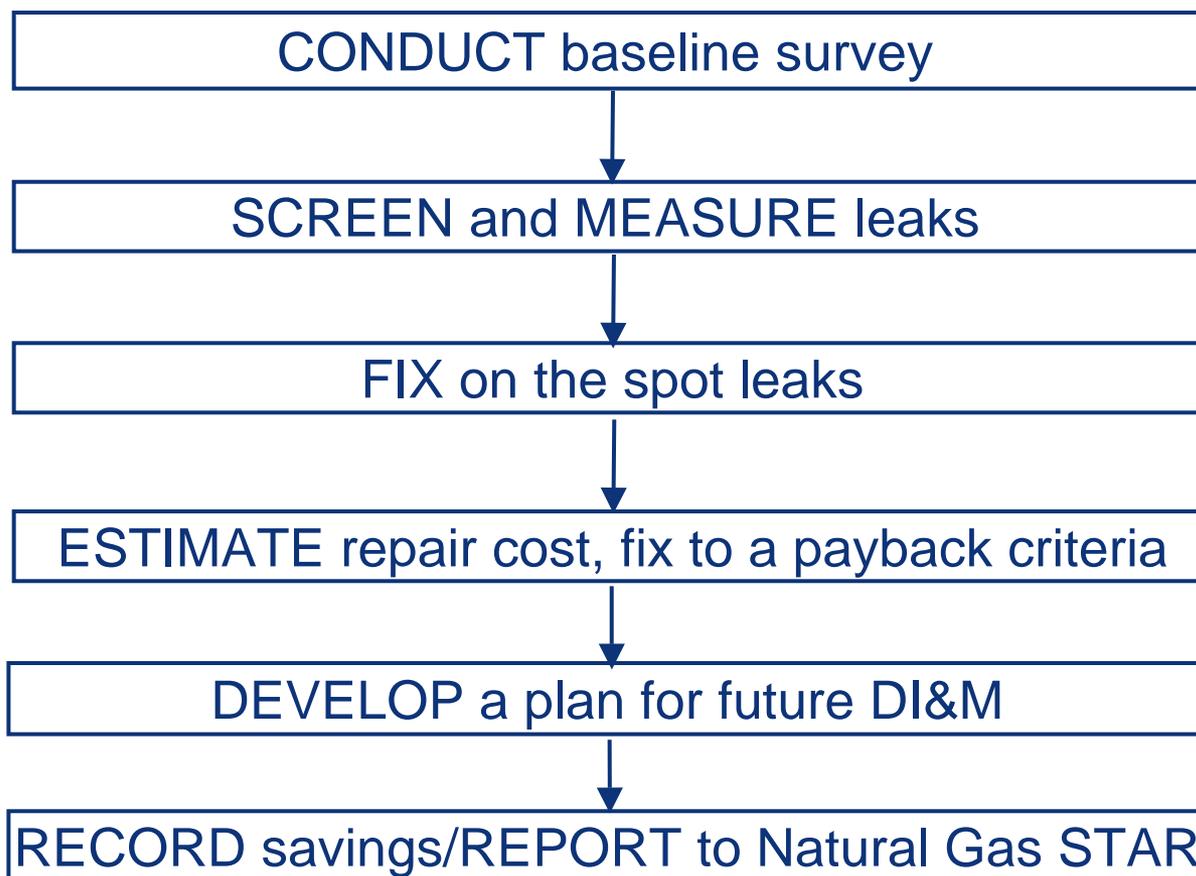

How Do You Implement DI&M?

- 🔥 Screening - find the leaks
 - 🔥 Soap bubble screening
 - 🔥 Electronic screening (“sniffer”)
 - 🔥 Toxic vapor analyzer (TVA)
 - 🔥 Organic vapor analyzer (OVA)
 - 🔥 Ultrasound leak detection
 - 🔥 Acoustic leak detection
 - 🔥 Infrared leak detection

Toxic Vapor Analyzer



Acoustic Leak Detection



How Do You Implement DI&M?

- 🔥 Evaluate the leaks detected - measure results
 - 🔥 High volume sampler
 - 🔥 Toxic vapor analyzer (correlation factors)
 - 🔥 Rotameters
 - 🔥 Calibrated bagging



How Do You Implement DI&M?

Summary of Screening and Measurement Techniques		
Instrument/ Technique	Effectiveness	Approximate Capital Cost
Soap Solution	★★	\$
Electronic Gas Detector	★	\$\$
Acoustic Detector/ Ultrasound Detector	★★	\$\$\$
TVA (Flame Ionization Detector)	★	\$\$\$
Calibrated Bagging	★	\$\$
High Volume Sampler	★★★	\$\$\$
Rotameter	★★	\$\$
Infrared Leak Detection	★★★	\$\$\$

Source: EPA's Lessons Learned

* - Least effective at screening/measurement

\$ - Smallest capital cost

*** - Most effective at screening/measurement

\$\$\$ - Largest capital cost

Estimating Comprehensive Survey Cost

- 💧 Cost of complete screening survey using high volume sampler (processing plant)
 - 💧 Ranges \$15,000 to \$20,000 per medium size plant
 - 💧 Rule of Thumb: \$1 per component for an average processing plant
 - 💧 Cost per component for remote production sites would be higher than \$1
- 💧 25 to 40% cost reduction for follow-up survey
 - 💧 Focus on higher probability leak sources (e.g. compressors)

DI&M by Infrared Leak Detection

- Real-time detection of methane leaks
 - Quicker identification & repair of leaks
 - Screen hundreds of components an hour
 - Screen inaccessible areas simply by viewing them



Source: Leak Surveys Inc.

Infrared Methane Leak Detection

- 🔥 Video recording of fugitive leaks detected by various infrared devices



Is Recovery Profitable?

Repair the Cost-Effective Components			
Component	Value of lost gas ¹ (\$)	Estimated repair cost (\$)	Payback (months)
Plug Valve: Valve Body	29,498	200	0.1
Union: Fuel Gas Line	28,364	100	0.1
Threaded Connection	24,374	10	0.0
Distance Piece: Rod Packing	17,850	2,000	1.4
Open-Ended Line	16,240	60	0.1
Compressor Seals	13,496	2,000	1.8
Gate Valve	11,032	60	0.1
Source: Hydrocarbon Processing, May 2002 1 – Based on \$7/Mcf gas price			

DI&M - Lessons Learned

- 🔥 A successful, cost-effective DI&M program requires measurement of the leaks
- 🔥 A high volume sampler is an effective tool for quantifying leaks and identifying cost-effective repairs
- 🔥 Open-ended lines, compressor seals, blowdown valves, engine-starters, and pressure relief valves represent <3% of components but >60% of methane emissions
- 🔥 The business of leak detection has changed dramatically with new technology



Source: Chevron

Partner Experience - Targa Resources (formerly Dynegy)

- 🔥 Surveyed components in two processing plants: 23,169 components
- 🔥 Identified leaking components: 857 about 3.6%
- 🔥 Repaired components: 80 to 90% of the identified leaking components
- 🔥 Annual methane emissions reductions: 198,000 Mcf/year
- 🔥 Annual savings: \$1,386,000/year (at \$7/Mcf)



Discussion

- 🔥 Industry experience applying these technologies and practices
- 🔥 Limitations on application of these technologies and practices
- 🔥 Actual costs and benefits