

EPA Region 10 HAP and VOC Emission Factors for Lumber Drying, January 2021

This spreadsheet calculates and compiles hazardous air pollutant (HAP) and volatile organic compound (VOC) emission factors (EF) in units of pounds of pollutant per thousand board feet of lumber dried (lb/mbf) that are preferred by EPA Region 10 for estimating emissions from indirect steam-heated batch lumber drying kilns. The EFs are based on actual lab-scale emission test data when available. When no suitable HAP or VOC test data is available for a species of wood (e.g., western red cedar, engelmann spruce, larch and western white pine), EFs for similar species are substituted. When there are more than one similar species, the highest of the EF for the similar species is substituted. When test data is available for some individual HAP but not others (e.g., western true firs and lodgepole pine), data from the species and another similar to it are used to conservatively estimate HAP EF. The calculation of VOC EF follows the methodology presented in EPA's OTM-26 (Interim VOC Measurement Protocol for the Wood Products Industry - July 2007, commonly referred to as "WPP1 VOC"), except that adjustments to the RM25A measurement have been performed beyond formaldehyde and methanol to include as many as five other compounds (acetaldehyde, propionaldehyde, acrolein, acetic acid and ethanol). With the VOC EF calculation factoring in the contribution of individual compounds, no data substitution or estimation of the constituents is performed. To maintain the integrity of the calculation, only measured (not estimated) values for the constituents are used.

A summary of the EFs for each species of wood is included on this sheet. The sheets that follow present the original test data as well as the calculations for creating each EF. There are two sheets per lumber species: one for HAPs and one for VOCs. The methanol, formaldehyde and VOC EF are temperature dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. Because acetaldehyde, propionaldehyde and acrolein emissions across different species are not consistently dependent upon maximum drying temperature, EF are calculated by averaging test results. Whereas HAP EF are derived in the HAP sheets, EF for individual VOC ethanol and acetic acid are derived in the VOC sheets for douglas fir and ponderosa pine (only wood species undergoing testing for these two VOC compounds).

Species	WPP1 VOC ^{1,2} (lb/mbf)	Methanol ² (lb/mbf)	Formaldehyde ² (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
Non-Resinous Softwood Species						
Western True Firs ³	0.00817x - 1.02133	0.00465x - 0.73360	0.00016x - 0.02764	0.0550	0.0003	0.0009
Western Hemlock	0.00369x - 0.39197	0.00249x - 0.39750	0.000046x - 0.007622	0.0677	0.0004	0.0012
Western Red Cedar	0.00817x - 1.02133	0.00465x - 0.73360	0.00016x - 0.02764	0.0677	0.0004	0.0012
Resinous Softwood Species (Non-Pine Family)						
Douglas Fir	0.01460x - 1.77130	0.00114x - 0.16090	0.000028x - 0.003800	0.0275	0.0003	0.0005
Engelmann Spruce	0.1769	0.00088x - 0.13526	0.000042x - 0.006529	0.0201	0.0002	0.0005
Larch	0.01460x - 1.77130	0.00114x - 0.16090	0.000028x - 0.003800	0.0275	0.0003	0.0005
Resinous Softwood Species (Pine Family)						
Lodgepole Pine	1.1352	0.0550	0.0030	0.0104	0.0003	0.0008
Ponderosa Pine	0.02083x - 1.30029	0.00137x - 0.18979	0.000074x - 0.010457	0.0340	0.0010	0.0026
Western White Pine	0.02083x - 1.30029	0.00137x - 0.18979	0.000074x - 0.010457	0.0340	0.0010	0.0026

¹ VOC emissions approximated consistent with OTM-26 underestimate emissions when the mass-to-carbon ratio of unidentified VOC exceeds that of propane. Ethanol and acetic acid are examples of compounds that contribute to lumber drying VOC emissions (for some species more than others), and both have mass-to-carbon ratios exceeding that of propane. Contribution of ethanol and acetic acid to VOC emissions has been quantified here when emissions testing data is available.

² Because WPP1 VOC, methanol and formaldehyde emissions are dependent upon maximum drying temperature, a best-fit linear equation with dependent variable maximum temperature of heated air entering the lumber has been generated to model emissions, with a couple of exceptions. For engelmann spruce and lodgepole pine, a single VOC EF (based upon high-temperature drying) has been generated due to lack of sufficient test data to build a best-fit linear equation.

³ Western true firs consist of the following seven species classified in the same Abies genus: bristlecone fir, California red fir, grand fir, noble fir, pacific silver fir, subalpine fir and white fir.

Hazardous Air Pollutant Emission Factors for Drying Western True Fir Lumber

This sheet presents lab-scale HAP test data and calculations used to create HAP EF for drying western true fir lumber in an indirect steam-heated batch kiln. Western true fir consists of the following seven species classified in the same Abies genus: bristlecone fir, California red fir, grand fir, noble fir, pacific silver fir, subalpine fir and white fir. The methanol and formaldehyde EF are temperature dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The acetaldehyde EF reflects the results of a single test. No EF are presented for either propionaldehyde or acrolein as EPA Region 10 is not aware of any test data for those HAP.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Western True Fir HAP Emission Test Data by Drying Temperature¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Lumber Dimensions	Moisture Content ² (%) (Initial / Final)	Time to Final Moisture Content (hours)	HAP Sample Collection Technique	Reference
180	0.096	0.0022	no data	no data	no data	2x6	122.0 / 15	42.6	NCASI Method IM/CAN/WP-99.01 without cannisters.	3, 4, 5, 12, 14
180	0.148	0.0034	no data	no data	no data	2x6	133.2 / 15	46.9		
225	no data	no data	0.0550	no data	no data	2x4	170 / 13	54	Dinitrophenylhydrazine coated cartridges.	7
240	0.42	0.0156	no data	no data	no data	2x6	126.3 / 15	24	NCASI chilled impinger method.	5
240	0.419	0.0163	no data	no data	no data	2x6	119.0 / 15	24		

¹ Green highlight denotes data generated by testing conducted on the small-scale kiln at the University of Idaho. All other data was generated by testing conducted on the smaller of the two small-scale kilns at OSU.

² Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Western True Fir HAP Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
180	0.0875	0.0016	no data	no data	no data
180	0.1348	0.0025	no data	no data	no data
225	no data	no data	0.0550	no data	no data
240	0.3827	0.0115	no data	no data	no data
240	0.3818	0.0120	no data	no data	no data

¹ Green highlighted results from the test conducted at the University of Idaho have not been adjusted because the kiln was not calibrated to a full-scale kiln.

Adjusted OSU emission test data value_i = (OSU reported emission test data value_i) X (NCASI TB No. 845 study full-scale kiln value/NCASI TB No. 845 study OSU small-scale kiln value_i)

where: OSU reported emission test data value_i is the emission rate "lb/mbf" for compound "i" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.

	NCASI TB No. 845 - Emission Rate (lb/mbf)				
	Methanol	Formaldehyde	Acetaldehyde	Propionaldehyde	Acrolein
Full-Scale Kiln	0.205	0.0155	0.039	0.001	0.006
OSU Kiln	0.225	0.0210	0.065	0.003	0.009

Step Three: Calculate Western True Fir HAP Emission Factors

Methanol ¹ (lb/mbf)	Formaldehyde ¹ (lb/mbf)	Acetaldehyde ² (lb/mbf)	Propionaldehyde ³ (lb/mbf)	Acrolein ³ (lb/mbf)
0.00465x - 0.73360	0.00016x - 0.02764	0.0550	0.0003	0.0009

¹ Because methanol and formaldehyde emissions are dependent upon drying temperature, best-fit linear equations model emissions with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

² The acetaldehyde EF reflects the results of a single test.

³ Propionaldehyde and acrolein EF are not based upon western true fir test data for those compounds. The EF are estimated using western true fir acetaldehyde data and western hemlock acetaldehyde, propionaldehyde and acrolein test data as follows:



propionaldehyde western true firs = (propionaldehyde western hemlock) * (acetaldehyde western true fir) / (acetaldehyde western hemlock)

acrolein western true firs = (acrolein western hemlock) * (acetaldehyde western true firs) / (acetaldehyde western hemlock)

Species	Emission Factor (lb/mbf)		
	Acetaldehyde	Propionaldehyde	Acrolein
Western True Firs	0.0550	0.0003	0.0009
Western Hemlock	0.0677	0.0004	0.0012

calculated values to estimate EF

See "Western True Fir Sub" sheet for more information.

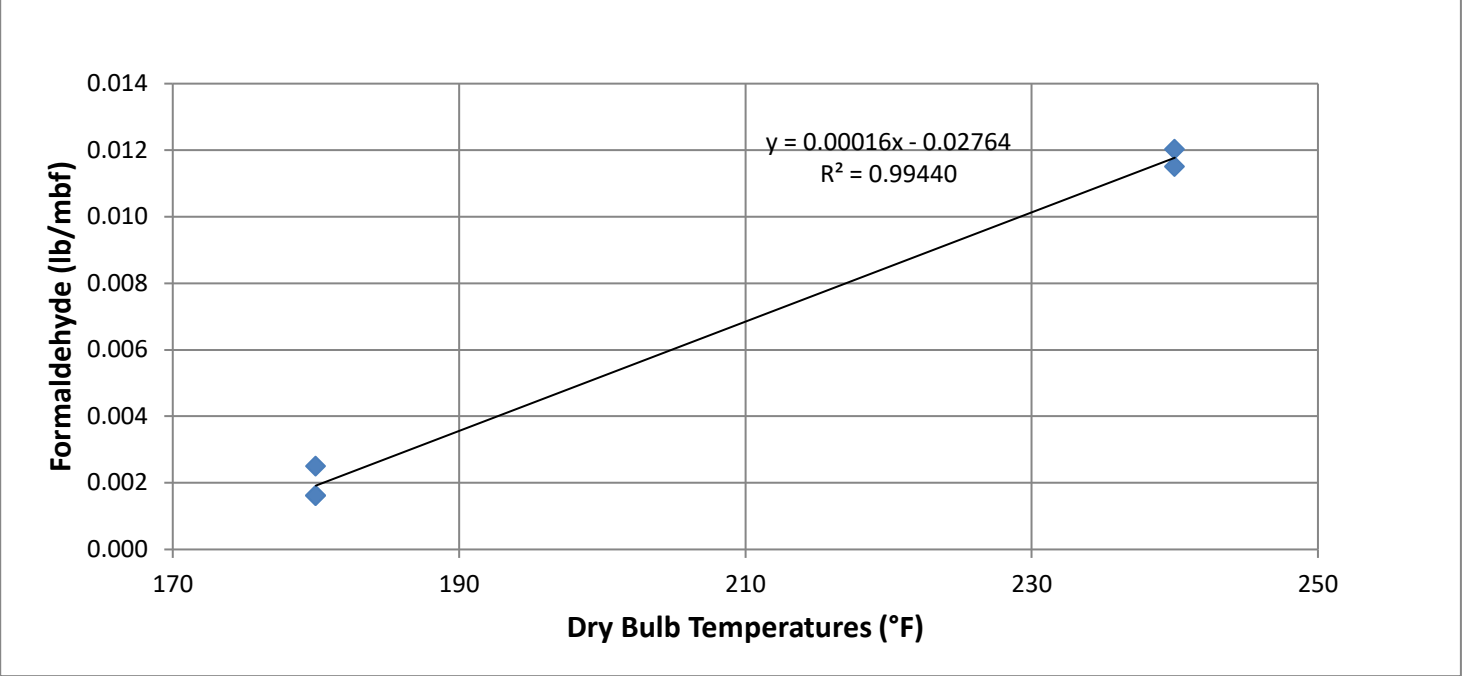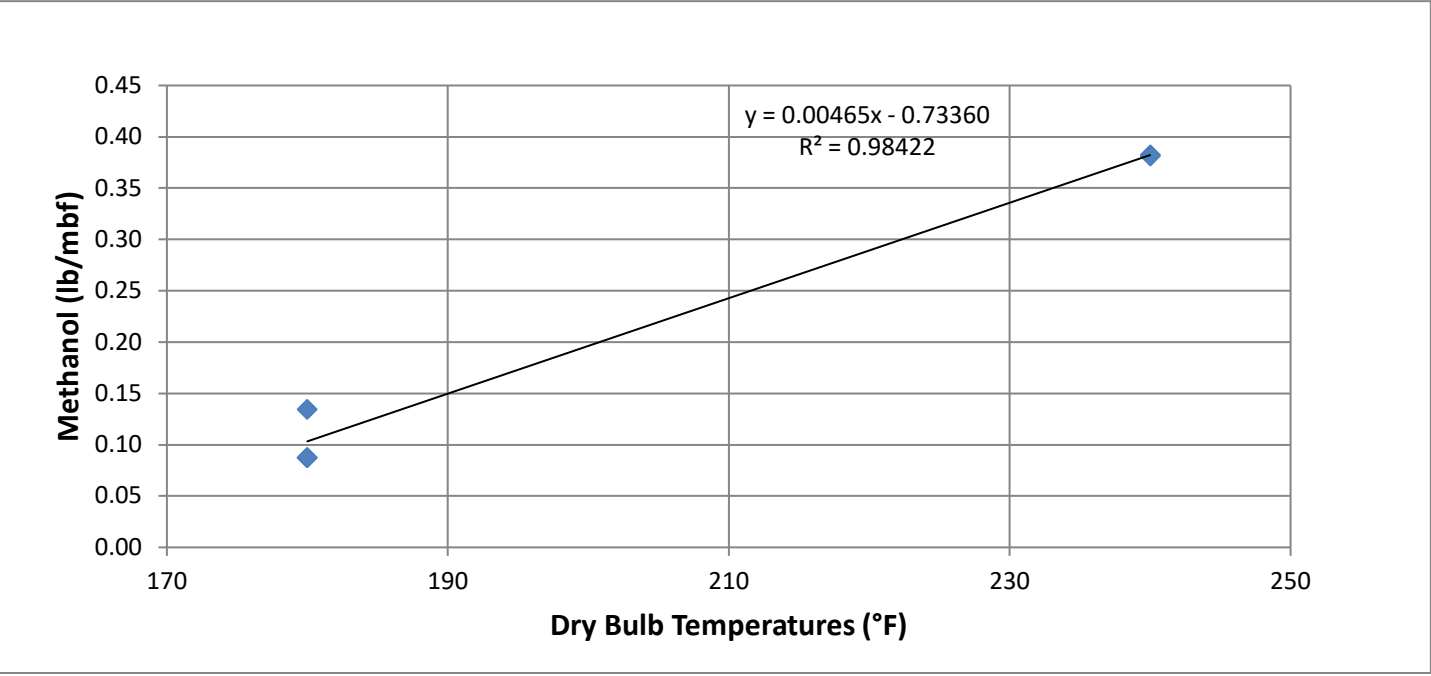

Volatile Organic Compound Emission Factors for Drying Western True Fir Lumber

This sheet presents lab-scale EPA Reference Method 25A (RM25A) and speciated VOC test data and calculations used to create VOC EF for drying western true fir lumber in an indirect steam-heated batch kiln. Western true fir consists of the following seven species classified in the same Abies genus: bristlecone fir, California red fir, grand fir, noble fir, pacific silver fir, subalpine fir and white fir. RM25A has some limitations in that it misses some pollutant compounds (or portions thereof) that are VOC and known to exist and reports the results "as carbon" which only accounts for the carbon portion of each compound measured. The missed pollutant compounds (some HAP and some non-HAP) are accounted for through separate testing. RM25A test data is adjusted to fully account for three known pollutant compounds that are VOC using separate speciated test data and is reported "as propane" to better represent all of the unspeciated VOC compounds. This technique is consistent with EPA's Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 (WPP1 VOC) except that the RM25A results are adjusted to account for not only methanol and formaldehyde but also for acetaldehyde in this case.

More specifically, ten separate drying-temperature-specific VOC emission rates (upon which a best-fit linear equation will be established) are calculated based upon underlying RM25A and speciated VOC test data as indicated above. Temperature-specific methanol and formaldehyde emission rates are calculated for each temperature at which RM25A testing was performed using temperature-dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The temperature-independent acetaldehyde emission rate reflects the result of a single test. EPA Region 10 is not aware of any further speciated VOC test data. That portion of the (speciated) VOC compounds that are measured by the RM25A test method (based on known flame ionization detector response factors) is subtracted from the RM25A measured emission rate. The remaining "unspeciated" RM25A emission rate is adjusted to represent propane rather than carbon and then added to the speciated VOC emission rate to provide the "total" temperature-specific VOC emission rate. The resultant VOC EF is a 10-point best-fit linear equation with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Note that reporting the unspeciated VOC as propane (mass-to-carbon ratio of 1.22 and a response factor of 1) may underestimate the actual mass of VOC for certain wood species because VOC compounds like ethanol and acetic acid with higher mass-to-carbon ratios (1.92 and 2.5, respectively) and lower response factors (0.66 and 0.575, respectively) can be a significant portion of the total VOC. Based upon the mass-to-carbon ratios and response factors noted above, 1 lb/mbf ethanol is reported as 0.4194 lb/mbf propane and 1 lb/mbf acetic acid is reported as 0.2806 lb/mbf propane through the use of EPA Reference Method 25A unless compound-specific sampling and analysis is performed. The contribution of ethanol and acetic acid has been quantified through sampling and analysis for douglas fir and ponderosa pine. For douglas fir, ethanol's contribution over three tests was measured to be 0, 1.4 and 5.4 percent of WPP1 VOC, and acetic acid's contribution over the same three tests was measured to be 37, 20 and 13 percent of WPP1 VOC. For ponderosa pine, ethanol's contribution over one test was measured to be 32 percent of WPP1 VOC, and acetic acid's contribution over the same test was measured to be 6.4 percent. Without western true fir lumber drying test data for ethanol and acetic acid, EPA assumes propane adequately represents the mix of unspeciated VOC.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Western True Fir RM25A VOC Emission Test Data by Drying Temperature¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)	Lumber Dimensions	Moisture Content ² (%) (Initial/Final)	Time to Final Moisture Content (hours)	Method 25A Analyzer	Reference
180	0.26	2x6	106.3 / 15	36.6	JUM 3-200	3, 4
180	0.27	2x6	113.6 / 15	43.2		
180	0.22	2x6	122.0 / 15	42.6		
180	0.25	2x6	133.2 / 15	46.9	JUM 3-200	3, 4, 5, 12
190	0.63	2x4	138.1 / 15	70		
190	0.50	2x4	138.1 / 15	75		
200	0.53	2x4	96.1 / 15	47	JUM VE-7	2
225	0.39	2x4	170 / 13	54		
240	0.62	2x6	126.3 / 15	25		
240	0.6	2x6	119.0 / 15	25	JUM 3-200	5

¹ Green highlight denotes data generated by testing conducted on the small-scale kiln at the University of Idaho. All other data was generated by testing conducted on the smaller of the two small-scale kilns at OSU.

² Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Western True Fir VOC Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)
180	0.22
180	0.22
180	0.18
180	0.21
190	0.52
190	0.42
200	0.44
225	0.39
240	0.52
240	0.50

¹ Green highlighted results from the test conducted at the University of Idaho have not been adjusted because the kiln was not calibrated to a full-scale kiln.

Adjusted OSU emission test data value = (OSU reported emission test data value) X (NCASI TB No. 845 study full-scale kiln value/NCASI TB No. 845 study OSU small-scale kiln value)

where: OSU reported emission test data value is the RM25A VOC as carbon emission rate "lb/mbf" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according to the schedule employed by the full-scale kiln.

NCASI TB No. 845 - Emission Rate (lb/mbf)

RM25A VOC as carbon

Full-Scale Kiln 3.53333

OSU Kiln 4.25000

Step Three: Calculate/Compile Western True Fir Speciated HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing¹

Maximum Dry Bulb Temperature (°F)	Methanol ² (lb/mbf)	Formaldehyde ³ (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
180	0.1034	0.0012	0.0550	no data	no data
190	0.1499	0.0028			
200	0.1964	0.0044			
225	0.3127	0.0084			
240	0.3824	0.0108			

¹ See western true fir HAP sheet for lab-scale test data and calculations.

² Methanol EF = 0.00465x - 0.73360; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.
³ Formaldehyde EF = 0.00016x - 0.02764; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Step Four: Compile True Fir Speciated Non-HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing

Maximum Dry Bulb Temperature (°F)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)
180	no data	no data
190		
200		
225		
240		

Step Five: Convert Western True Fir Speciated HAP and Non-HAP Emission Factors to "as Carbon" and Total

Speciated Compound "X" expressed as carbon = (RF_X) X (SC_X) X [(MW_C) / (MW_X)] X [(#C_X) / (#C_C)]
where: RF_X represents the flame ionization detector (FID) response factor (RF) for speciated compound "X"
SC_X represents emissions of speciated compound "X" expressed as the entire mass of compound emitted
MW_C equals "12.0110" representing the molecular weight (MW) for carbon as carbon is becoming the "basis" for expressing mass of speciated compound "X"
MW_X represents the molecular weight for speciated compound "X"
#C_X represents the number of carbon atoms in speciated compound "X"
#C_C equals "1" as the single carbon atom is becoming the "basis" for expressing mass of speciated compound "X"

Maximum Dry Bulb Temperature (°F)	Methanol as Carbon (lb/mbf)	Formaldehyde as Carbon (lb/mbf)	Acetaldehyde as Carbon (lb/mbf)	Propionaldehyde as Carbon (lb/mbf)	Acrolein as Carbon (lb/mbf)	Ethanol as Carbon (lb/mbf)	Acetic Acid as Carbon (lb/mbf)	Speciated Compounds as Carbon (lb/mbf)
180	0.0279	0	0.0150	no data	no data	no data	no data	0.0429
190	0.0405	0						0.0555
200	0.0530	0						0.0680
225	0.0844	0						0.0994
240	0.1032	0						0.1182

SUM



Element and Compound Information

Element / Compound	FID RF ¹	Molecular Weight (lb/lb-mol)	Formula	Number of Carbon Atoms	Number of Hydrogen Atoms	Number of Oxygen Atoms	Reference
Methanol	0.72	32.042	CH ₄ O	1	4	1	1
Formaldehyde	0	30.0262	CH ₂ O	1	2	1	16
Acetaldehyde	0.5	44.053	C ₂ H ₄ O	2	4	1	20
Propionaldehyde	0.66	58.0798	C ₃ H ₆ O	3	6	1	20
Acrolein	0.66	56.064	C ₃ H ₄ O	3	4	1	20
Ethanol	0.66	46.0688	C ₂ H ₆ O	2	6	1	1
Acetic Acid	0.575	60.0524	C ₂ H ₄ O ₂	2	4	2	1
Propane	1	44.0962	C ₃ H ₈	3	8	0	16
Carbon	-	12.0110	C	1	-	-	-
Hydrogen	-	1.0079	H	-	1	-	-
Oxygen	-	15.9994	O	-	-	1	-

¹ FID RF = volumetric concentration or "instrument display" / compound's actual known concentration. Numerator and denominator expressed on same basis (ie. carbon, propane, etc) and concentration in units of "ppm."

Step Six: Subtract Speciated HAP and Non-HAP Compounds from Western True Fir RM25A VOC Emission Factors and Convert Result to "as Propane"

Maximum Dry Bulb Temperature (°F)	FROM STEP TWO		FROM STEP FIVE		Method 25A VOC as Carbon without Speciated Compounds (lb/mbf)	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)
	Method 25A VOC as Carbon (lb/mbf)		Speciated Compounds as Carbon (lb/mbf)			
180	0.22	MINUS ⇒	0.0429	EQUALS ⇒	0.1733	0.2120
180	0.22		0.0429		0.1816	0.2222
180	0.18		0.0429		0.1400	0.1713
180	0.21		0.0429		0.1649	0.2018
190	0.52		0.0555		0.4683	0.5731
190	0.42		0.0555		0.3602	0.4408
200	0.44		0.0680		0.3726	0.4560
225	0.39		0.0994		0.2906	0.3557
240	0.52		0.1182		0.3972	0.4861
240	0.50		0.1182		0.3806	0.4658

Propane Mass Conversion Factor

X 1.2238 =

Method 25A VOC as propane without speciated compounds = (VOC_C) X (1/RF_{C₃H₈}) X [(MW_{C₃H₈}) / (MW_C)] X [(#C_C) / (#C_{C₃H₈})]
where: VOC_C represents Method 25A VOC as carbon without speciated compounds
RF_{C₃H₈} equals "1" and represents the FID RF for propane. All alkanes, including propane, have a RF of 1.
MW_{C₃H₈} equals "44.0962" and represents the molecular weight for propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC
MW_C equals "12.0110" and represents the molecular weight for carbon
#C_C equals "1" as the single carbon atom was the "basis" for which Method 25A VOC test results were determined as illustrated in Step One of this spreadsheet

#C_{3H8} equals "3" as three carbon atoms are present within propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

Note: The following portion from the equation immediately above, (1/RFC_{3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{3H8})], equals 1.2238 and can be referred to as the "propane mass conversion factor."


Step Seven: Calculate WPP1 VOC by Adding Speciated HAP and Non-HAP Compounds to Western True Fir RM25A VOC Emission Factors "as Propane"

WPP1 VOC = Method 25A VOC as propane without speciated compounds + ∑ speciated compounds expressed as the entire mass of compound

FROM STEP SIX		FROM STEP THREE					FROM STEP FOUR		WPP1 VOC
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)	(lb/mbf)
180	0.2120	0.1034	0.0012	0.0550	no data	no data	no data	no data	0.3716
180	0.2222	0.1034	0.0012						0.3818
180	0.1713	0.1034	0.0012						0.3309
180	0.2018	0.1034	0.0012						0.3614
190	0.5731	0.1499	0.0028						0.7808
190	0.4408	0.1499	0.0028						0.6485
200	0.4560	0.1964	0.0044						0.7118
225	0.3557	0.3127	0.0084						0.7317
240	0.4861	0.3824	0.0108						0.9343
240	0.4658	0.3824	0.0108						0.9140

Step Eight: Generate Western True Fir Best-Fit Linear Equation with Dependent Variable Maximum Drying Temperature of Heated Air Entering the Lumber to Model WPP1 VOC Emissions

WPP1 VOC (lb/mbf): 0.00817x - 1.02133 ; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber

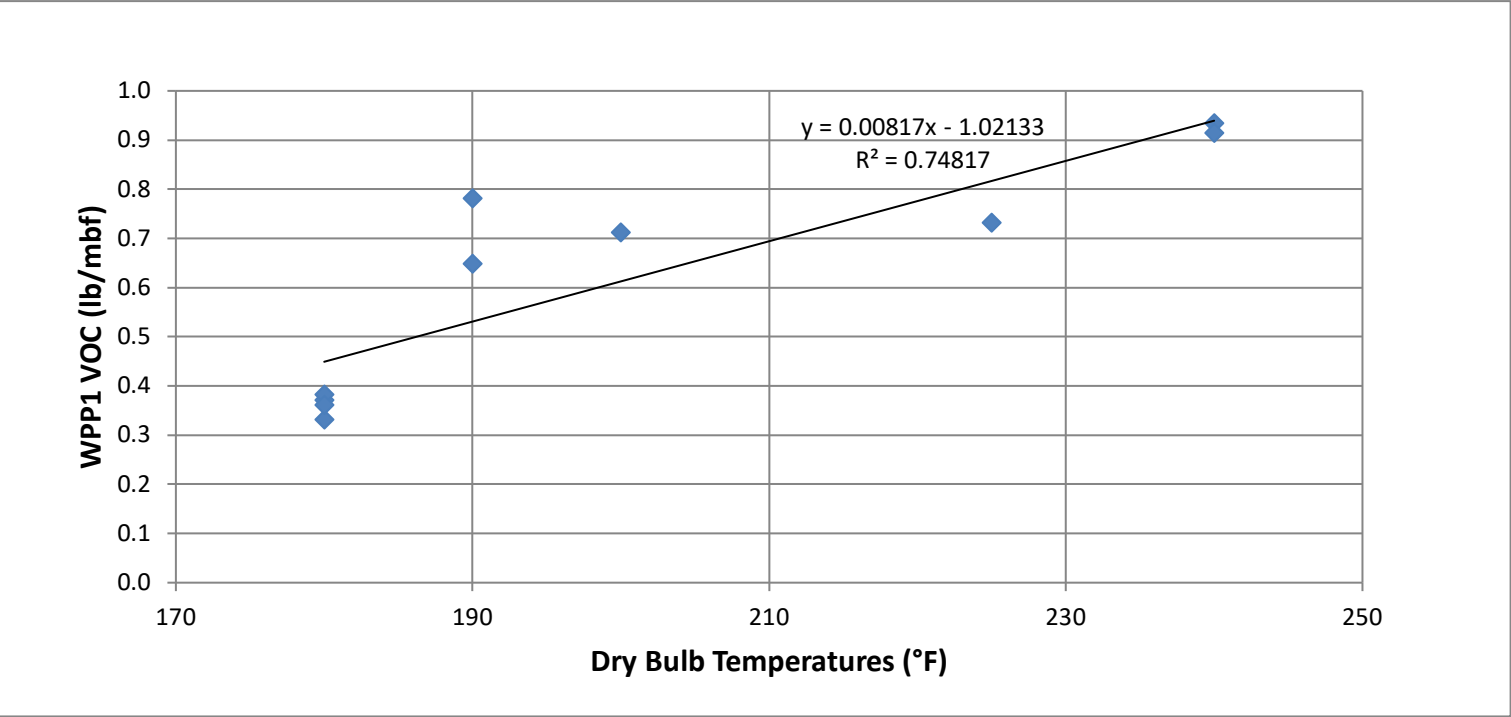


The Problem: Missing Data for Western True Firs Propionaldehyde and Acrolein EF

Species	WPP1 VOC lb/mbf	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
Non-Resinous Softwood Species						
Western True Firs	0.00817x - 1.02133	0.00465x - 0.73360	0.00016x - 0.02764	0.0550	no data	no data
Western Hemlock	0.00369x - 0.39197	0.00249x - 0.39750	0.000046x - 0.007622	0.0677	0.0004	0.0012


WTF - Western True Firs WH - Western Hemlock

Compounds Whose Emission Factors are Known for WTF


Acetaldehyde: CH3CHO
Aldehyde
MW: 44 g/g-mol
Boiling point: 70F @ 760 mmhg
Vapor pressure: 760 mmHg @ 68F

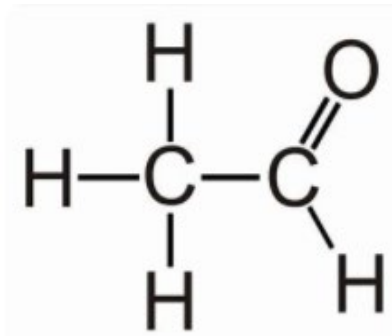

Methanol: CH3OH
Alcohol
MW: 32 g/g-mol
Boiler point: 149F @ 760 mmhg
Vapor pressure: 92 mmhg @ 68F




Formaldehyde: CH2O
Aldehyde
MW: 30 g/g-mol
Boiler point: -6F @ 760 mmhg
Vapor pressure: 3,890 mmhg @ 77F




Compounds Whose Emission Factors are Unknown for WTF

Propionaldehyde: CH3CH2CHO
Aldehyde
MW: 58 g/g-mol
Boiling point: 120F @ 760mmhg
Vapor pressure: 235 mmhg @ 68F

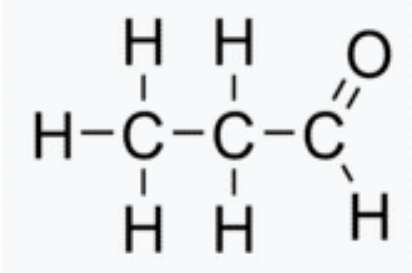

Acrolein: C3H4O
Unsaturated aldehyde
MW: 56 g/g-mol
Boiling Point: 126F @ 760 mmhg
Vapor pressure: 210 mmhg @ 68F

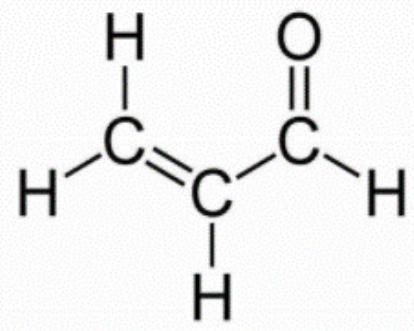

Option	WESTERN TRUE FIRS SUBSTITUTE EMISSION FACTOR (lb/mbf)			
	Propionaldehyde	Fraction of Default	Acrolein	Fraction of Default
Default option: WH EF become WTF EF	0.0004	N/A	0.0012	N/A
Option A: Use acetaldehyde as a basis	0.0003	0.81	0.0009	0.79
Option B: Use formaldehyde (200F) as a basis	0.0011	2.76	0.0033	2.76
Option C: Use formaldehyde (220F) as a basis	0.0012	3.03	0.0036	3.03
Option D: Use methanol (200F) as a basis	0.0008	1.95	0.0023	1.95
Option E: Use methanol (220F) as a basis	0.0008	1.93	0.0023	1.93
Option F: Use VOC (200F) as a basis	0.0007	1.77	0.0021	1.77
Option G: Use VOC (220F) as a basis	0.0007	1.85	0.0022	1.85

Option A: Use acetaldehyde as a basis

Propionaldehyde WTF = (Propionaldehyde WH) * (Acetaldehyde WTF) / (Acetaldehyde WH)

Acrolein WTF = (Acrolein WH) * (Acetaldehyde WTF) / (Acetaldehyde WH)

EMISSION FACTOR (lb/mbf)			
	Acetaldehyde	Propionaldehyde	Acrolein
Western True Firs	0.0550	0.0003	0.0009
Western Hemlock	0.0677	0.0004	0.0012

Click on cell for calculation

Option B: Use formaldehyde (200F) as a basis

Propionaldehyde WTF = (Propionaldehyde WH) * (Formaldehyde 200F WTF) / (Formaldehyde 200F WH)

Acrolein WTF = (Acrolein WH) * (Formaldehyde 200F WTF) / (Formaldehyde 200F WH)

EMISSION FACTOR (lb/mbf)			
	200 F Formaldehyde	Propionaldehyde	Acrolein
Western True Firs	0.00436	0.0011	0.0033
Western Hemlock	0.001578	0.0004	0.0012

Option C: Use formaldehyde (220F) as a basis

Propionaldehyde WTF = (Propionaldehyde WH) * (Formaldehyde 220F WTF) / (Formaldehyde 220F WH)

Acrolein WTF = (Acrolein WH) * (Formaldehyde 220F WTF) / (Formaldehyde 220F WH)

EMISSION FACTOR (lb/mbf)			
	220 F Formaldehyde	Propionaldehyde	Acrolein
Western True Firs	0.00756	0.0012	0.0036
Western Hemlock	0.002498	0.0004	0.0012

Option D: Use methanol (200F) as a basis

Propionaldehyde WTF = (Propionaldehyde WH) * (Methanol 200F WTF) / (Methanol 200F WH)

Acrolein WTF = (Acrolein WH) * (Methanol 200F WTF) / (Methanol 200F WH)

EMISSION FACTOR (lb/mbf)			
	200 F Methanol	Propionaldehyde	Acrolein
Western True Firs	0.1964	0.0008	0.0023
Western Hemlock	0.1005	0.0004	0.0012

Option E: Use methanol (220F) as a basis

Propionaldehyde WTF = (Propionaldehyde WH) * (Methanol 220F WTF) / (Methanol 220F WH)
Acrolein WTF = (Acrolein WH) * (Methanol 220F WTF) / (Methanol 220F WH)

EMISSION FACTOR (lb/mbf)			
	220 F Methanol	Propionaldehyde	Acrolein
Western True Firs	0.2894	0.0008	0.0023
Western Hemlock	0.1503	0.0004	0.0012

Option F: Use VOC (200F) as a basis

Propionaldehyde WTF = (Propionaldehyde WH) * (VOC 200F WTF) / (VOC 200F WH)
Acrolein WTF = (Acrolein WH) * (VOC 200F WTF) / (VOC 200F WH)

EMISSION FACTOR (lb/mbf)			
	200 F VOC	Propionaldehyde	Acrolein
Western True Firs	0.61267	0.0007	0.0021
Western Hemlock	0.34603	0.0004	0.0012

Option G: Use VOC (220F) as a basis

Propionaldehyde WTF = (Propionaldehyde WH) * (VOC 220F WTF) / (VOC 220F WH)
Acrolein WTF = (Acrolein WH) * (VOC 220F WTF) / (VOC 220F WH)

EMISSION FACTOR (lb/mbf)			
	220 F VOC	Propionaldehyde	Acrolein
Western True Firs	0.77607	0.0007	0.0022
Western Hemlock	0.41983	0.0004	0.0012

Hazardous Air Pollutant Emission Factors for Drying Western Hemlock Lumber

This sheet presents lab-scale test data and calculations used to create HAP EF for drying western hemlock lumber in an indirect steam-heated batch kiln. The methanol and formaldehyde EF are temperature dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The acetaldehyde, propionaldehyde and acrolein EF are calculated by averaging test results.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Western Hemlock HAP Emission Test Data by Drying Temperature¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Lumber Dimensions	Moisture Content ² (%) (Initial / Final)	Time to Final Moisture Content (hours)	HAP Sample Collection Technique	Reference
180	0.083	0.0013	no data	no data	no data	2x4	102.3 / 14.7	49.5	NCASI Method 98.01	14, 15
180	0.075	0.0014	0.078	0.002	0.0012	2x4	102.3 / 14.7	49.5	NCASI Method 105	14, 15, 18
180	0.094	0.0015	0.141	0.0008	0.0012	2x4 or 2x6	93.5 / 17.5	no data	NCASI Method 105	18
180	0.052	0.0007	no data	no data	no data	2x4	88.8 / 15	46.2	NCASI Method CI//WP-98.01	13
180	0.0312	0.00082	no data	no data	no data	2x4	56.8 / 15	38.35	NCASI Method CI//WP-98.01	8, 11, 14
180	0.0304	0.00082	no data	no data	no data	2x4	51.1 / 15	35.75		
200	0.098	0.0015	no data	no data	no data	2x6	81.0 / 15	45.2	NCASI Method CI//WP-98.01	11, 14
200	0.175	0.0016	no data	no data	no data	2x6	73.7 / 15	36.5		
200	0.154	0.0018	no data	no data	no data	2x6	100.1 / 15	47.4		
200	0.044	0.0008	0.133	0.0008	0.0024	2x4 or 2x6	83.9 / 15.0	no data	NCASI Method 105	14, 18
200	0.077	0.0014	0.128	0.001	0.0011	2x4 or 2x6	98.6 / 15.0	no data		
200	0.057	0.0014	no data	no data	no data	2x4	76.0 / 15	30.25	NCASI Method CI//WP-98.01	9, 11, 14
215	0.138	0.0043	no data	no data	0.0027	2x4	119.7 / 15	38	no data	6, 11, 14
225	0.189	0.0035	no data	no data	no data	2x6	82 / 15	31.3	NCASI Method CI//WP-98.01	11, 14
225	0.167	0.0034	no data	no data	no data	2x6	77.4 / 15	28.6		
225	0.24	0.004	no data	no data	no data	2x6	101.7 / 15	33.5		
235	0.187	0.0045	0.084	0.0014	0.0019	2x4 or 2x6	76.2 / 15.0	no data	NCASI Method 105	18

¹ All data was generated by testing conducted on the smaller of the two small-scale kilns at OSU.

² Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Western Hemlock HAP Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
180	0.0756	0.0010	no data	no data	no data
180	0.0683	0.0010	0.0468	0.0007	0.0008
180	0.0856	0.0011	0.0846	0.0003	0.0008
180	0.0474	0.0005	no data	no data	no data
180	0.0284	0.0006	no data	no data	no data
180	0.0277	0.0006	no data	no data	no data
200	0.0893	0.0011	no data	no data	no data
200	0.1594	0.0012	no data	no data	no data
200	0.1403	0.0013	no data	no data	no data
200	0.0401	0.0006	0.0798	0.0003	0.0016
200	0.0702	0.0010	0.0768	0.0003	0.0007
200	0.0519	0.0010	no data	no data	no data
215	0.1257	0.0032	no data	no data	0.0018
225	0.1722	0.0026	no data	no data	no data
225	0.1522	0.0025	no data	no data	no data

225	0.2187	0.0030	no data	no data	no data
235	0.1704	0.0033	0.0504	0.0005	0.0013

Adjusted OSU emission test data value_i = (OSU reported emission test data value_i) X (NCASI TB No. 845 study full-scale kiln value_i/NCASI TB No. 845 study OSU small-scale kiln value_i)

where: OSU reported emission test data value_i is the emission rate "lb/mbf" for compound "i" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.



	NCASI TB No. 845 - Emission Rate (lb/mbf)				
	Methanol	Formaldehyde	Acetaldehyde	Propionaldehyde	Acrolein
Full-Scale Kiln	0.205	0.0155	0.039	0.001	0.006
OSU Kiln	0.225	0.0210	0.065	0.003	0.009

Step Three: Calculate Western Hemlock HAP Emission Factors

Methanol ¹ (lb/mbf)	Formaldehyde ¹ (lb/mbf)	Acetaldehyde ² (lb/mbf)	Propionaldehyde ² (lb/mbf)	Acrolein ² (lb/mbf)
0.00249x - 0.39750	0.000046x - 0.007622	0.0677	0.0004	0.0012

¹ Because methanol and formaldehyde emissions are dependent upon maximum drying temperature, best-fit linear equations model emissions with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber

² Because acetaldehyde, propionaldehyde and acrolein emissions across different species are not consistently dependent upon maximum drying temperature, EF are calculated by averaging test results.

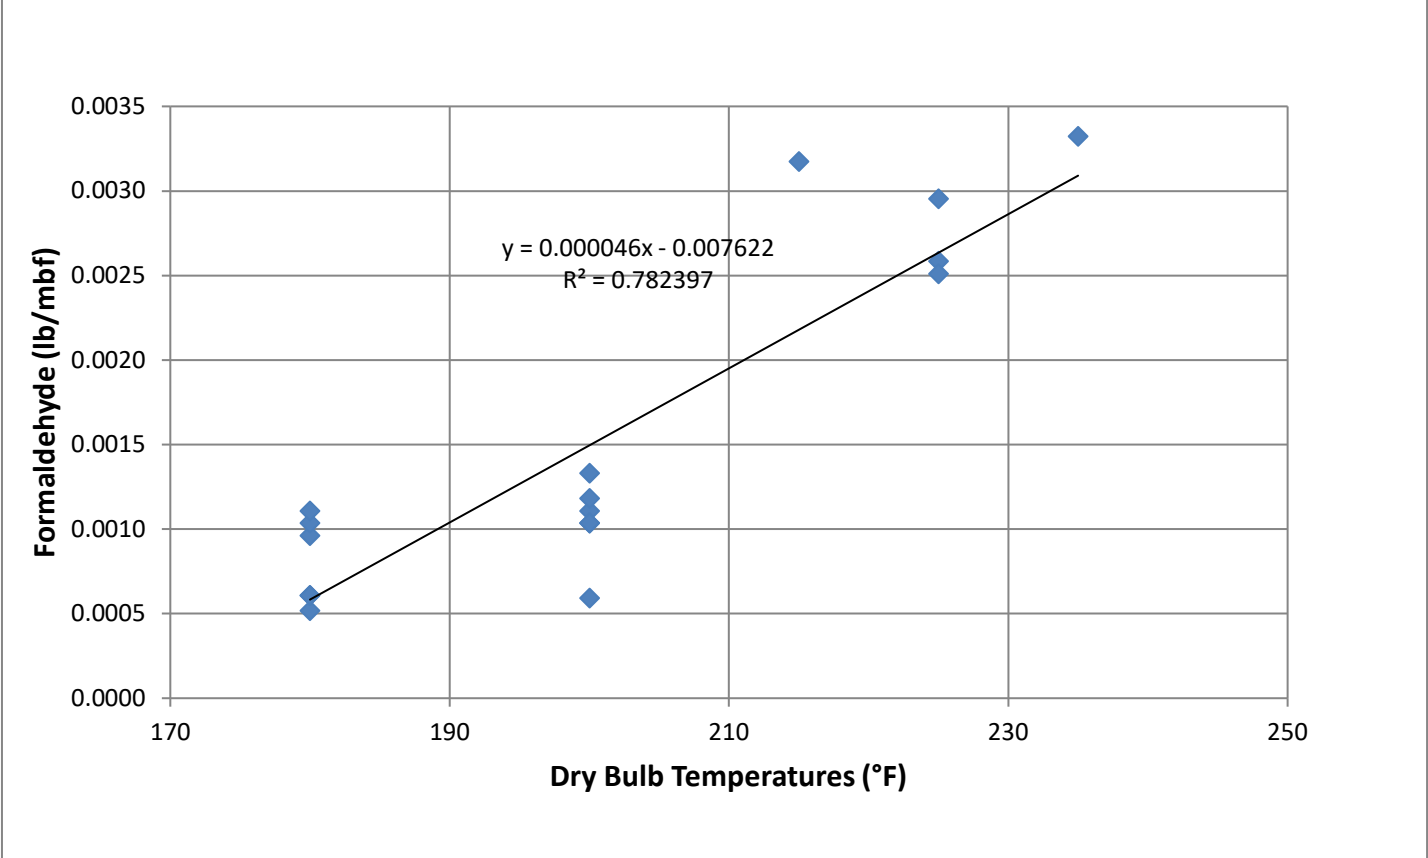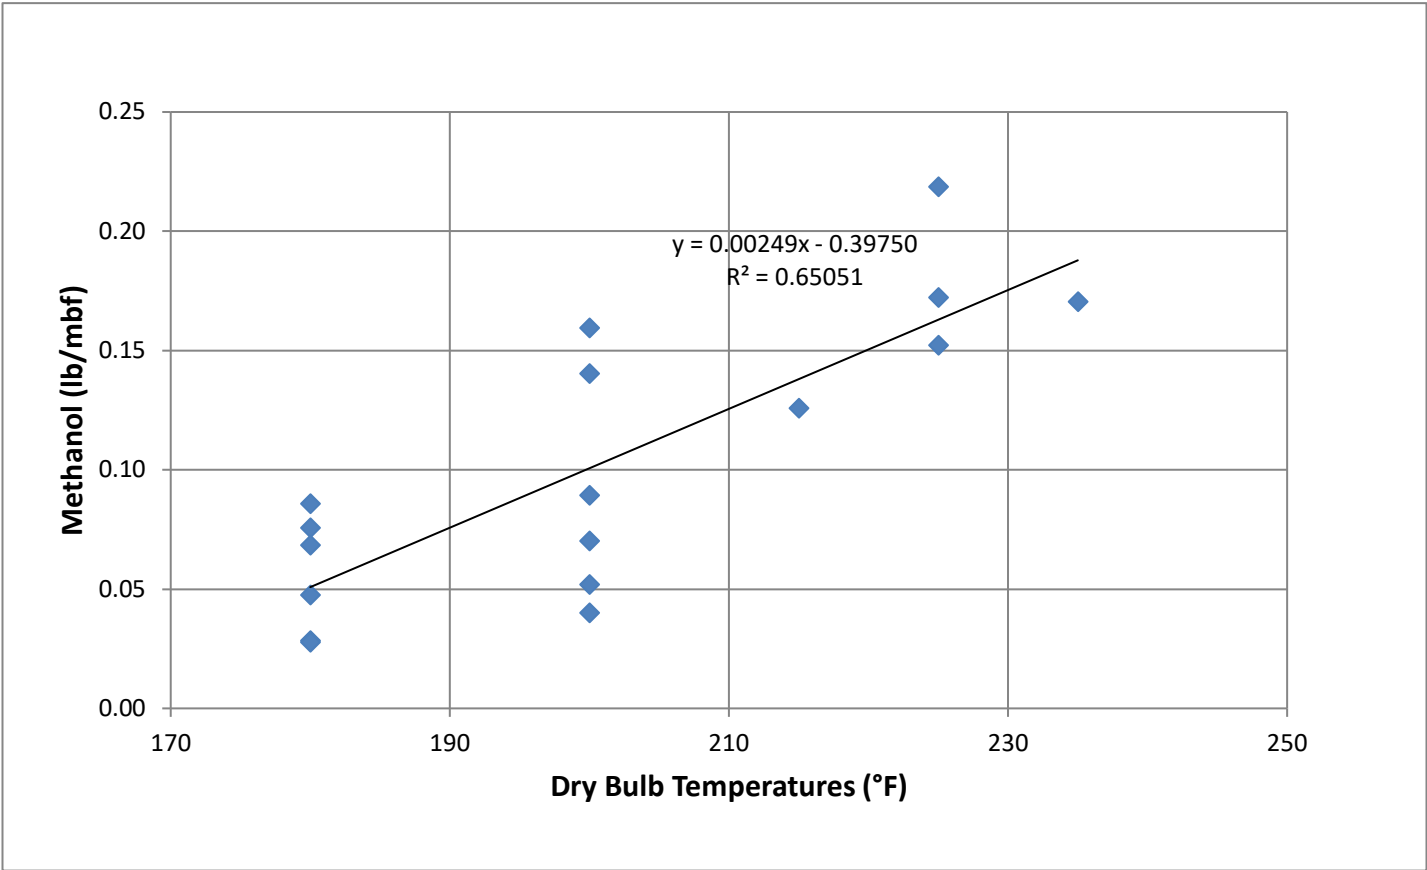

Volatile Organic Compound Emission Factors for Drying Western Hemlock Lumber

This sheet presents lab-scale EPA Reference Method 25A (RM25A) and speciated VOC test data and calculations used to create VOC EF for drying western hemlock lumber in an indirect steam-heated batch kiln. RM25A has some limitations in that it misses some pollutant compounds (or portions thereof) that are VOC and known to exist and reports the results "as carbon" which only accounts for the carbon portion of each compound measured. The missed pollutant compounds (some HAP and some non-HAP) are accounted for through separate testing. RM25A test data is adjusted to fully account for five known pollutant compounds that are VOC using separate speciated test data and is reported "as propane" to better represent all of the unspciated VOC compounds. This technique is consistent with EPA's Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 (WPP1 VOC) except that the RM25A results are adjusted to account for not only methanol and formaldehyde but also for acetaldehyde, propionaldehyde and acrolein in this case.

More specifically, twenty-three separate drying-temperature-specific VOC emission rates (upon which a best-fit linear equation will be established) are calculated based upon underlying RM25A and speciated VOC test data as indicated above. Temperature-specific methanol and formaldehyde emission rates are calculated for each temperature at which RM25A testing was performed using temperature-dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The temperature-independent acetaldehyde, propionaldehyde and acrolein emission rates reflect the average of all test results independent of the temperature of heated air entering the lumber. EPA Region 10 is not aware of any further speciated VOC test data. That portion of the (speciated) VOC compounds that are measured by the RM25A test method (based on known flame ionization detector response factors) is subtracted from the RM25A measured emission rate. The remaining "unspeciated" RM25A emission rate is adjusted to represent propane rather than carbon and then added to the speciated VOC emission rate to provide the "total" temperature-specific VOC emission rate. The resultant VOC EF is a 23-point best-fit linear equation with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Note that reporting the unspciated VOC as propane (mass-to-carbon ratio of 1.22 and a response factor of 1) may underestimate the actual mass of VOC for certain wood species because VOC compounds like ethanol and acetic acid with higher mass-to-carbon ratios (1.92 and 2.5, respectively) and lower response factors (0.66 and 0.575, respectively) can be a significant portion of the total VOC. Based upon the mass-to-carbon ratios and response factors noted above, 1 lb/mbf ethanol is reported as 0.4194 lb/mbf propane and 1 lb/mbf acetic acid is reported as 0.2806 lb/mbf propane through the use of EPA Reference Method 25A unless compound-specific sampling and analysis is performed. The contribution of ethanol and acetic acid has been quantified through sampling and analysis for douglas fir and ponderosa pine. For douglas fir, ethanol's contribution over three tests was measured to be 0, 1.4 and 5.4 percent of WPP1 VOC, and acetic acid's contribution over the same three tests was measured to be 37, 20 and 13 percent of WPP1 VOC. For ponderosa pine, ethanol's contribution over one test was measured to be 32 percent of WPP1 VOC, and acetic acid's contribution over the same test was measured to be 6.4 percent. Without western hemlock lumber drying test data for ethanol and acetic acid, EPA assumes propane adequately represents the mix of unspciated VOC.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Western Hemlock RM25A VOC Emission Test Data by Drying Temperature^{1,2}

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)	Lumber Dimensions	Moisture Content ³ (%) (Initial/Final)	Time to Final Moisture Content (hours)	Method 25A Analyzer	Reference
180	0.73	2x6	126.6 / 15	66.5	no data	11
180	0.66	2x6	139.3 / 15	67.9		
180	0.6	2x6	127.8 / 15	65.7		
180	0.67	2x6	132.7 / 15	67		
180	0.17	2x4	114.8 / 15	45	no data	11
180	0.07	2x4	103.1 / 15	40.7		
180	0.12	2x4	98.0 / 15	37.5		
180	0.4	2x4	115.7 / 15	52.9		
180	0.236	2x4 or 2x6	93.5 / 17.5	no data	JUM VE-7	18
180	0.142	2x4	102.3 / 14.7	49.5	JUM VE-7	15, 18
180	0.18	2x4	88.8 / 15	46.2	JUM VE-7	13
180	0.198	2x4	56.8 / 15	38.35	JUM 3-200	8, 11
180	0.122	2x4	51.1 / 15	35.75		
200	0.24	2x4	112.8 / 15	40	JUM VE-7	2
200	0.2	2x6	81.0 / 15	45.2	no data	11
200	0.15	2x6	73.7 / 15	36.5		
200	0.3	2x6	100.1 / 15	47.4		
200	0.204	2x4	76.0 / 15	30.25	JUM 3-200	9, 11
200	0.214	2x4 or 2x6	83.9 / 15.0	no data	JUM VE-7	18
200	0.239	2x4 or 2x6	98.6 / 15.0	no data		
215	0.34	2x4	112.9 / 15	32.7	no data	11
215	0.34	2x4	119.7 / 15	38	JUM 3-200	6, 11
225	0.28	2x6	82 / 15	31.3	no data	11
225	0.27	2x6	77.4 / 15	28.6		
225	0.31	2x6	101.7 / 15	33.5		
235	0.247	2x4 or 2x6	81.6 / 15.0	no data	JUM VE-7	18
235	0.226	2x4 or 2x6	76.2 / 15.0	no data		

¹ Blue highlight denotes data not considered by EPA Region 10 in 2012. The four test runs not considered here were obtained from a single "sample" and appeared to use a much longer drying cycle than would be in common use in the Pacific Northwest. Therefore, these highlighted values were not used in the EF derivation.

² Green highlight denotes data generated by testing conducted on the small-scale kiln at the University of Idaho. All other data was generated by testing conducted on the smaller of the two small-scale kilns at OSU.

³ Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Western Hemlock VOC Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)
180	0.141
180	0.058
180	0.100
180	0.333
180	0.196
180	0.118
180	0.150

180	0.165
180	0.101
200	0.24
200	0.166
200	0.125
200	0.249
200	0.170
200	0.178
200	0.199
215	0.283
215	0.283
225	0.233
225	0.224
225	0.258
235	0.205
235	0.188

¹ Green highlighted results from the test conducted at the University of Idaho have not been adjusted because the kiln was not calibrated to a full-scale kiln.

Adjusted OSU emission test data value = (OSU reported emission test data value) X (NCASI TB No. 845 study full-scale kiln value/NCASI TB No. 845 study OSU small-scale kiln value)

where: OSU reported emission test data value is the RM25A VOC as carbon emission rate "lb/mbf" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.

NCASI TB No. 845 - Emission Rate (lb/mbf)

RM25A VOC as carbon

Full-Scale Kiln 3.53333
OSU Kiln 4.25000

Step Three: Calculate/Compile Western Hemlock Speciated HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing¹

Maximum Dry Bulb Temperature (°F)	Methanol ² (lb/mbf)	Formaldehyde ³ (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
180	0.0507	0.0007	0.0677	0.0004	0.0012
200	0.1005	0.0016			
215	0.1379	0.0023			
225	0.1628	0.0027			
235	0.1877	0.0032			

¹ See western hemlock HAP sheet for lab-scale test data and calculations.

² Methanol EF = 0.00249x - 0.39750; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

³ Formaldehyde EF = 0.000046x - 0.007622; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Step Four: Compile Western Hemlock Speciated Non-HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing

Maximum Dry Bulb Temperature (°F)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)
180	no data	no data
200		
215		
225		
235		

Step Five: Convert Western Hemlock Speciated HAP and Non-HAP Emission Factors to "as Carbon" and Total

Speciated Compound "X" expressed as carbon = (RF_X) X (SC_X) X [(MW_C) / (MW_X)] X [(#C_X) / (#C_C)]

where: RF_X represents the flame ionization detector (FID) response factor (RF) for speciated compound "X"

SC_X represents emissions of speciated compound "X" expressed as the entire mass of compound emitted

MW_C equals "12.0110" representing the molecular weight (MW) for carbon as carbon is becoming the "basis" for expressing mass of speciated compound "X"

MW_X represents the molecular weight for speciated compound "X"

#C_X represents the number of carbon atoms in speciated compound "X"

#C_C equals "1" as the single carbon atom is becoming the "basis" for expressing mass of speciated compound "X"

Maximum Dry Bulb Temperature (°F)	Methanol as Carbon (lb/mbf)	Formaldehyde as Carbon (lb/mbf)	Acetaldehyde as Carbon (lb/mbf)	Propionaldehyde as Carbon (lb/mbf)	Acrolein as Carbon (lb/mbf)	Ethanol as Carbon (lb/mbf)	Acetic Acid as Carbon (lb/mbf)
180	0.0137	0	0.0185	0.0002	0.0005	no data	no data
200	0.0271	0					
215	0.0372	0					

Speciated Compounds as Carbon (lb/mbf)
0.0328
0.0462
0.0563

225	0.0439	0						SUM	0.0630
235	0.0506	0							0.0698

Element and Compound Information

Element / Compound	FID RF ¹	Molecular Weight (lb/lb-mol)	Formula	Number of Carbon Atoms	Number of Hydrogen Atoms	Number of Oxygen Atoms	Reference
Methanol	0.72	32.042	CH ₄ O	1	4	1	1
Formaldehyde	0	30.0262	CH ₂ O	1	2	1	16
Acetaldehyde	0.5	44.053	C ₂ H ₄ O	2	4	1	20
Propionaldehyde	0.66	58.0798	C ₃ H ₆ O	3	6	1	20
Acrolein	0.66	56.064	C ₃ H ₄ O	3	4	1	20
Ethanol	0.66	46.0688	C ₂ H ₆ O	2	6	1	1
Acetic Acid	0.575	60.0524	C ₂ H ₄ O ₂	2	4	2	1
Propane	1	44.0962	C ₃ H ₈	3	8	0	16
Carbon	-	12.0110	C	1	-	-	-
Hydrogen	-	1.0079	H	-	1	-	-
Oxygen	-	15.9994	O	-	-	1	-

¹ FID RF = volumetric concentration or "instrument display" / compound's actual known concentration. Numerator and denominator expressed on same basis (ie. carbon, propane, etc) and concentration in units of "ppm."

Step Six: Subtract Speciated HAP and Non-HAP Compounds from Western Hemlock RM25A VOC Emission Factors and Convert Result to "as Propane"

Maximum Dry Bulb Temperature (°F)	FROM STEP TWO Method 25A VOC as Carbon (lb/mbf)		FROM STEP FIVE Speciated Compounds as Carbon (lb/mbf)		Method 25A VOC as Carbon without Speciated Compounds (lb/mbf)		Method 25A VOC as Propane without Speciated Compounds (lb/mbf)
180	0.1413		0.0328		0.1085		0.1328
180	0.0582		0.0328		0.0254		0.0311
180	0.0998		0.0328		0.0670		0.0820
180	0.3325		0.0328		0.2998		0.3668
180	0.1962		0.0328		0.1634		0.2000
180	0.118		0.0328		0.0853		0.1043
180	0.150		0.0328		0.1169		0.1430
180	0.165		0.0328		0.1318		0.1613
180	0.101		0.0328		0.0686		0.0840
200	0.240		0.0462		0.1938		0.2371
200	0.166		0.0462		0.1200		0.1469
200	0.125		0.0462		0.0785		0.0960
200	0.249		0.0462		0.2032		0.2486
200	0.170		0.0462		0.1234		0.1510
200	0.178		0.0462		0.1317		0.1611
200	0.199		0.0462		0.1525		0.1866
215	0.283		0.0563		0.2264		0.2770
215	0.283		0.0563		0.2264		0.2770
225	0.233		0.0630		0.1697		0.2077
225	0.224		0.0630		0.1614		0.1976
225	0.258		0.0630		0.1947		0.2383
235	0.205		0.0698		0.1356		0.1659
235	0.188		0.0698		0.1181		0.1446

MINUS

EQUALS

X 1.2238 =

Propane Mass Conversion Factor

Method 25A VOC as propane without speciated compounds = (VOC_C) X (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})]

where: VOC_C represents Method 25A VOC as carbon without speciated compounds

RF_{C3H8} equals "1" and represents the FID RF for propane. All alkanes, including propane, have a RF of 1.

MW_{C3H8} equals "44.0962" and represents the molecular weight for propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

MW_C equals "12.0110" and represents the molecular weight for carbon

#C_C equals "1" as the single carbon atom was the "basis" for which Method 25A VOC test results were determined as illustrated in Step One of this spreadsheet

#C_{C3H8} equals "3" as three carbon atoms are present within propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

Note: The following portion from the equation immediately above, (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})], equals 1.2238 and can be referred to as the "propane mass conversion factor."


Step Seven: Calculate WPP1 VOC by Adding Speciated HAP and Non-HAP Compounds to Western Hemlock RM25A VOC Emission Factors "as Propane"

WPP1 VOC = Method 25A VOC as propane without speciated compounds + ∑ speciated compounds expressed as the entire mass of compound

FROM STEP SIX		FROM STEP THREE					FROM STEP FOUR		WPP1 VOC
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)	(lb/mbf)
180	0.1328	0.0507	0.0007	0.0677	0.0004	0.0012	no data	no data	0.2534
180	0.0311	0.0507	0.0007						0.1505
180	0.0820	0.0507	0.0007						0.2014
180	0.3668	0.0507	0.0007						0.4863
180	0.2000	0.0507	0.0007						0.3194
180	0.1043	0.0507	0.0007						0.2238
180	0.1430	0.0507	0.0007						0.2624
180	0.1613	0.0507	0.0007						0.2808
180	0.0840	0.0507	0.0007						0.2034
200	0.2371	0.1005	0.0016						0.4064
200	0.1469	0.1005	0.0016						0.3161
200	0.0960	0.1005	0.0016						0.2653
200	0.2486	0.1005	0.0016						0.4179
200	0.1510	0.1005	0.0016						0.3202
200	0.1611	0.1005	0.0016						0.3304
200	0.1866	0.1005	0.0016						0.3558
215	0.2770	0.1379	0.0023						0.4836
215	0.2770	0.1379	0.0023						0.4836
225	0.2077	0.1628	0.0027						0.4392
225	0.1976	0.1628	0.0027						0.4290
225	0.2383	0.1628	0.0027						0.4697
235	0.1659	0.1877	0.0032						0.4223
235	0.1446	0.1877	0.0032						0.4010

Step Seven: Generate Western Hemlock Best-Fit Linear Equation with Dependent Variable Maximum Drying Temperature of Heated Air Entering the Lumber to Model WPP1 VOC Emissions

WPP1 VOC (lb/mbf): 0.00369x - 0.39197 ; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber

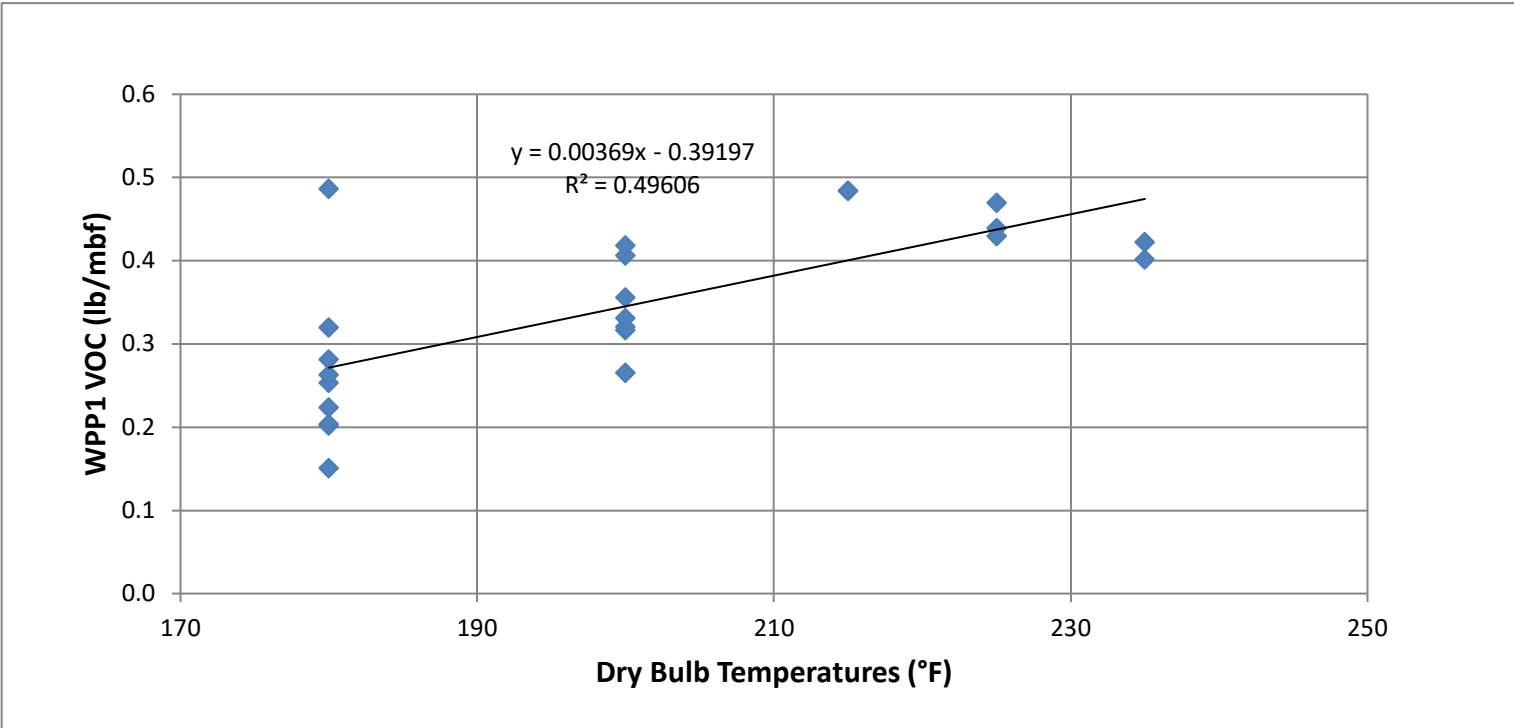

Hazardous Air Pollutant Emission Factors for Drying Western Red Cedar Lumber

This sheet presents the HAP EF for drying western red cedar lumber. EPA Region 10 is not aware of any HAP emission testing of western red cedar. When no test data is available for any HAP, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted.

In the absence of western red cedar test data, western true fir test data has been substituted for methanol and formaldehyde and western hemlock test data has been substituted for acetaldehyde, propionaldehyde and acrolein. Western red cedar is similar to western true firs and western hemlock in that all species are non-resinous softwood species in the scientific classification order Pinales. For methanol and formaldehyde, western true fir EF are greater. For acetaldehyde, western hemlock EF is greater. EPA Region 10 is not aware of any western true fir test data for either propionaldehyde or acrolein. See the western true fir and western hemlock HAP sheets for lab-scale test data and calculations.

Western Red Cedar (Western True Firs and Western Hemlock Substitution) HAP Emission Factors

Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
0.00465x - 0.73360	0.00016x - 0.02764	0.0677	0.0004	0.0012

Volatile Organic Compound Emission Factors for Drying Western Red Cedar Lumber

This sheet presents the VOC EF for drying western red cedar lumber. EPA Region 10 is aware of two tests being conducted while drying western red cedar lumber, and both were conducted at 160°F. Because VOC emissions increase with maximum drying temperature, employing an EF based upon testing at 160°F would underreport emissions when drying at maximum drying temperatures greater than 160°F. A temperature of 160°F is not a particularly high drying temperature. When little or no test data is available, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted.

Given the limited western red cedar test data, western true fir test data has been substituted. Western red cedar is similar to western true firs and western hemlock in that all species are non-resinous softwood species in the scientific classification order Pinales. Western true fir VOC emissions are greater than western hemlock VOC emissions. See the western true fir and western hemlock VOC sheets for lab-scale test data and calculations.

Western Red Cedar (Western True Firs Substitution) WPP1 VOC Emission Factor

WPP1 VOC (lb/mbf): 0.00817x - 1.02133 ; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumt

Hazardous Air Pollutant Emission Factors for Drying Douglas Fir Lumber

This sheet presents lab-scale test data and calculations used to create HAP EF for drying douglas fir lumber in an indirect steam-heated batch kiln. The methanol and formaldehyde EF are temperature dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The acetaldehyde, propionaldehyde and acrolein EF are calculated by averaging test results.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Douglas Fir HAP Emission Test Data by Drying Temperature¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Lumber Dimensions	Moisture Content ² (%) (Initial / Final)	Time to Final Moisture Content (hours)	HAP Sample Collection Technique	Reference
145	0.013	0.001	0.057	0.005	0.000	2x4	49.6 / 15	39.7	NCASI ISS/FP-A105.01	Link to June 8, 2012 Exterior Wood Test Report
160	0.025	0.0008	no data	no data	no data	2x6	37.3 / 15	23.5	NCASI Method IM/CAN/WP-99.01 without cannisters.	3, 4, 12, 14
160	0.023	0.0008	no data	no data	no data	2x6	44.9 / 15	28.5		
160	0.026	0.0017	no data	no data	no data	2x6	40.3 / 15	27.1		
160	0.018	0.0011	no data	no data	no data	2x6	31.9 / 15	25.2		
170	0.015	0.0005	no data	no data	no data	2x4	79.9 / 15	40.5	NCASI Method CI//WP-98.01	13
170	0.026	0.0008	no data	no data	no data	2x4	56.9 / 15	27.5	NCASI Method 98.01	15
170	0.024	0.0008	0.03	0.0004	0.0005	2x4	56.9 / 15	27.5	NCASI Method 105	15, 18
175	0.019	0.001	0.006	0.0001	0.0004	2x4	32.5 / 15	17.8	NCASI ISS/FP-A105.01	Link to May 23, 2013 Sierra Pacific Industries - Centralia Test Report
175	0.084	0.0016	0.042	0.0002	0.0008	4x5	39.5 / 15	150	NCASI ISS/FP-A105.01	Link to March 24, 2015 Columbia Vista Test Report
180	0.050	0.0023	0.050	0.0005	0.0009	2x4	43.7 / 15	48	NCASI Method 105	18, 22
180	0.084	0.0019	0.061	0.0003	0.0007	4x4	44.7 / 15	111	NCASI Method 105	19
200	0.068	0.0018	0.043	0.0005	0.0009	2x4	64.3 / 15	60	NCASI Method 105	14, 18, 22
200	0.069	0.0019	0.071	0.0006	0.0004	2x4	59.5 / 15	56		
200	0.080	0.003	0.037	0.0006	0.0017	2x4	69.3 / 15	20.8	NCASI ISS/FP-A105.01	Link to February 10, 2012 Hampton Lumber - Morton Test Report
220	no data	no data	0.030	no data	no data	2x4	73 / 12	46	Dinitrophenylhydrazine coated cartridges.	7
220	no data	no data	0.022	no data	no data	2x4	73 / 15	46		
235	0.117	0.0043	0.067	0.0008	0.0012	2x4 or 2x6	47.7 / 15	19	NCASI Method 105	18, 21

¹ Green highlight denotes data generated by testing conducted on the small-scale kiln at the University of Idaho. All other data was generated by testing conducted on the smaller of the two small-scale kilns at OSU.

² Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Douglas Fir HAP Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
145	0.012	0.0007	0.034	0.0017	0.0000
160	0.023	0.0006	no data	no data	no data
160	0.021	0.0006	no data	no data	no data
160	0.024	0.0013	no data	no data	no data

160	0.016	0.0008	no data	no data	no data
170	0.014	0.0004	no data	no data	no data
170	0.024	0.0006	no data	no data	no data
170	0.022	0.0006	0.018	0.0001	0.0003
175	0.017	0.0007	0.004	0.0000	0.0003
175	0.077	0.0012	0.025	0.0001	0.0005
180	0.046	0.0017	0.030	0.0002	0.0006
180	0.077	0.0014	0.037	0.0001	0.0005
200	0.062	0.0013	0.026	0.0002	0.0006
200	0.063	0.0014	0.043	0.0002	0.0003
200	0.073	0.0022	0.022	0.0002	0.0011
220	no data	no data	0.030	no data	no data
220	no data	no data	0.022	no data	no data
235	0.107	0.0032	0.040	0.0003	0.0008

¹ Green highlighted results from the test conducted at the University of Idaho have not been adjusted because the kiln was not calibrated to a full-scale kiln.

Adjusted OSU emission test data value_i = (OSU reported emission test data value_i) X (NCASI TB No. 845 study full-scale kiln value_i/NCASI TB No. 845 study OSU small-scale kiln value_i)

where: OSU reported emission test data value_i is the emission rate "lb/mbf" for compound "i" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.



	NCASI TB No. 845 - Emission Rate (lb/mbf)				
	Methanol	Formaldehyde	Acetaldehyde	Propionaldehyde	Acrolein
Full-Scale Kiln	0.205	0.0155	0.039	0.001	0.006
OSU Kiln	0.225	0.0210	0.065	0.003	0.009

Step Three: Calculate Douglas Fir HAP Emission Factors

Methanol ¹ (lb/mbf)	Formaldehyde ¹ (lb/mbf)	Acetaldehyde ² (lb/mbf)	Propionaldehyde ² (lb/mbf)	Acrolein ² (lb/mbf)
0.00114x - 0.16090	0.000028x - 0.003800	0.0275	0.0003	0.0005

¹ Because methanol and formaldehyde emissions are dependent upon drying temperature, best-fit linear equations model emissions with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

² Because acetaldehyde, propionaldehyde and acrolein emissions across different species are not consistently dependent upon maximum drying temperature, EF are calculated by averaging test results.

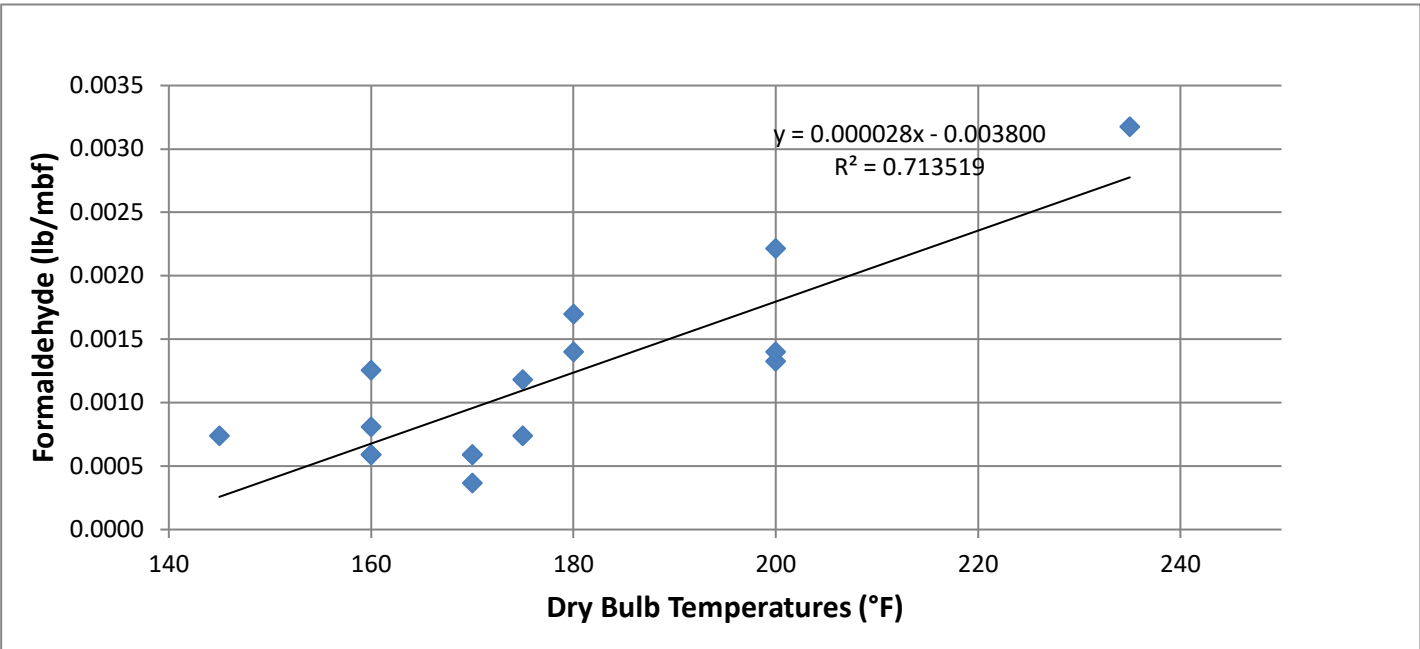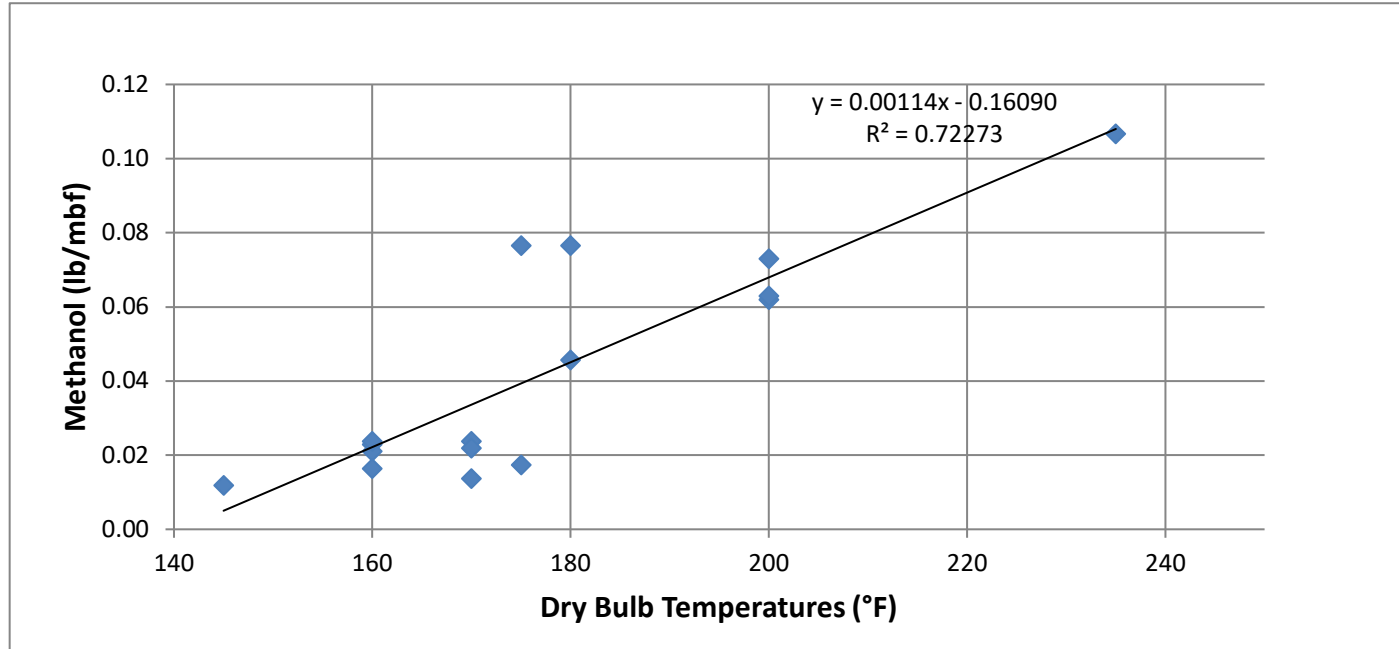

Volatile Organic Compound Emission Factors for Drying Douglas Fir Lumber

This sheet presents lab-scale EPA Reference Method 25A (RM25A) and speciated VOC test data and calculations used to create VOC EF for drying douglas fir lumber in an indirect steam-heated batch kiln. RM25A has some limitations in that it misses some pollutant compounds (or portions thereof) that are VOC and known to exist and reports the results “as carbon” which only accounts for the carbon portion of each compound measured. The missed pollutant compounds (some HAP and some non-HAP) are accounted for through separate testing. RM25A test data is adjusted to fully account for seven known pollutant compounds that are VOC using separate speciated test data and is reported “as propane” to better represent all of the unspeciated VOC compounds. This technique is consistent with EPA’s Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 (WPP1 VOC) except that the RM25A results are adjusted to account for not only methanol and formaldehyde but also for acetaldehyde, propionaldehyde, acrolein, ethanol and acetic acid in this case.

More specifically, twenty-one separate drying-temperature-specific VOC emission rates (upon which a best-fit linear equation will be established) are calculated based upon underlying RM25A and speciated VOC test data as indicated above. Temperature-specific methanol, formaldehyde and ethanol emission rates are calculated for each temperature at which RM25A testing was performed using temperature-dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The temperature-independent acetaldehyde, propionaldehyde, acrolein and acetic acid emission rates reflect the average of all test results independent of the temperature of heated air entering the lumber. EPA Region 10 is not aware of any further speciated VOC test data. That portion of the (speciated) VOC compounds that are measured by the RM25A test method (based on known flame ionization detector response factors) is subtracted from the RM25A measured emission rate. The remaining “unspeciated” RM25A emission rate is adjusted to represent propane rather than carbon and then added to the speciated VOC emission rate to provide the “total” temperature-specific VOC emission rate. The resultant VOC EF is a 21-point best-fit linear equation with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company’s October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Douglas Fir RM25A VOC Emission Test Data by Drying Temperature¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)	Lumber Dimensions	Moisture Content ² (%) (Initial/Final)	Time to Final Moisture Content (hours)	Method 25A Analyzer	Reference
145	0.24	2x4	49.6 / 15	39.7	JUM VE-7	Link to June 8, 2012 Exterior Wood Test Report
160	0.51	2x6	37.3 / 15	23.5	JUM 3-200	3, 4, 12
160	0.55	2x6	44.9 / 15	28.5		
160	0.45	2x6	40.3 / 15	27.1		
160	0.46	2x6	31.9 / 15	25.2		
170	0.65	2x4	79.9 / 15	40.5	JUM VE-7	13
170	0.24	2x4	56.9 / 15	27.5	JUM VE-7	15, 18
175	0.185	2x4	32.5 / 15	17.8	JUM VE-7	Link to May 23, 2013 Sierra Pacific Industries - Centralia Test Report
175	0.86	4x5	39.5 / 15	150	JUM VE-7	Link to March 24, 2015 Columbia Vista Test Report
180	0.942	2x4	38.9 / 15	63	JUM VE-7	2
180	0.669	2x4	44.9 / 15	42		
180	0.21	2x4	56.3 / 15	27		
180	0.575	2x4 or 2x6	43.7 / 15	no data	JUM VE-7	18
180	0.39	4x4	29.8 / 19	67.5	JUM 3-200	10
180	0.845	4x4	44.7 / 15	111	JUM VE-7	19
200	0.707	2x4 or 2x6	64.3 / 15	no data	JUM VE-7	18
200	0.879	2x4 or 2x6	59.5 / 15	no data		
200	0.66	2x4	69.3 / 15	20.8	JUM VE-7	Link to February 10, 2012 Hampton Lumber - Morton Test Report
220	1.2	2x4	73 / 12	46	JUM VE-7	7
220	1.3	2x4	73 / 15	46		
235	1.206	2x4 or 2x6	47.7 / 15	19	JUM VE-7	18, 21

¹ Green highlight denotes data generated by testing conducted on the small-scale kiln at the University of Idaho. All other data was generated by testing conducted on the smaller of the two small-scale kilns at OSU.

² Dry basis. Moisture content = (weight of water / weight wood) x 100.

Step Two: Adjust Douglas Fir VOC Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)
145	0.200
160	0.424
160	0.457
160	0.374
160	0.382
170	0.540
170	0.200
175	0.154
175	0.715
180	0.942
180	0.669
180	0.21
180	0.478
180	0.324
180	0.703
200	0.588

200	0.731
200	0.549
220	1.2
220	1.3
235	1.003

¹ Green highlighted results from the test conducted at the University of Idaho have not been adjusted because the kiln was not calibrated to a full-scale kiln.

Adjusted OSU emission test data value = (OSU reported emission test data value) X (NCASI TB No. 845 study full-scale kiln value/NCASI TB No. 845 study OSU small-scale kiln value)

where: OSU reported emission test data value is the RM25A VOC as carbon emission rate "lb/mbf" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according to the schedule employed by the full-scale kiln.

NCASI TB No. 845 - Emission Rate (lb/mbf)

RM25A VOC as carbon

Full-Scale Kiln 3.53333

OSU Kiln 4.25000

Step Three: Calculate/Compile Douglas Fir Speciated HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing¹

Maximum Dry Bulb Temperature (°F)	Methanol ² (lb/mbf)	Formaldehyde ³ (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
145	0.0044	0.0003	0.0275	0.0003	0.0005
160	0.0215	0.0007			
170	0.0329	0.0010			
175	0.0386	0.0011			
180	0.0443	0.0012			
200	0.0671	0.0018			
220	0.0899	0.0024			
235	0.1070	0.0028			

¹ See douglas fir HAP sheet for lab-scale test data and calculations.

² Methanol EF = 0.00114x - 0.16090; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

³ Formaldehyde EF = 0.000028x - 0.003800; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Step Four: Compile Douglas Fir Speciated Non-HAP Emission Test Data by Drying Temperature

Maximum Dry Bulb Temperature (°F)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)	Lumber Dimensions	Moisture Content ¹ (%) (Initial / Final)	Time to Final Moisture Content (hours)	VOC Sample Collection Technique	Reference
145	0.0000	0.166	2x4	49.6 / 15	39.7	NCASI ISS/FP-A105.01	Link to June 8, 2012 Exterior Wood Test Report
175	0.0010	0.094	2x4	32.5 / 15	17.8	NCASI ISS/FP-A105.01	Link to May 23, 2013 Sierra Pacific Industries - Centralia Test Report
175	0.0230	0.242	4x6	39.5 / 15	150	NCASI ISS/FP-A105.01	Link to March 24, 2015 Columbia Vista Test Report
200	0.0610	0.142	2x4	69.3 / 15	20.8	NCASI ISS/FP-A105.01	Link to February 10, 2012 Hampton Lumber - Morton Test Report


¹ Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Five: Calculate Douglas Fir Speciated Non-HAP Emission Factors

Ethanol ¹ (lb/mbf)	Acetic Acid ² (lb/mbf)
0.00107x - 0.16537	0.1610

¹ Because ethanol emissions are dependent upon drying temperature, a best-fit linear equation models emissions with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

² Because acetic acid emissions are independent of drying temperature, EF is calculated by averaging test results.

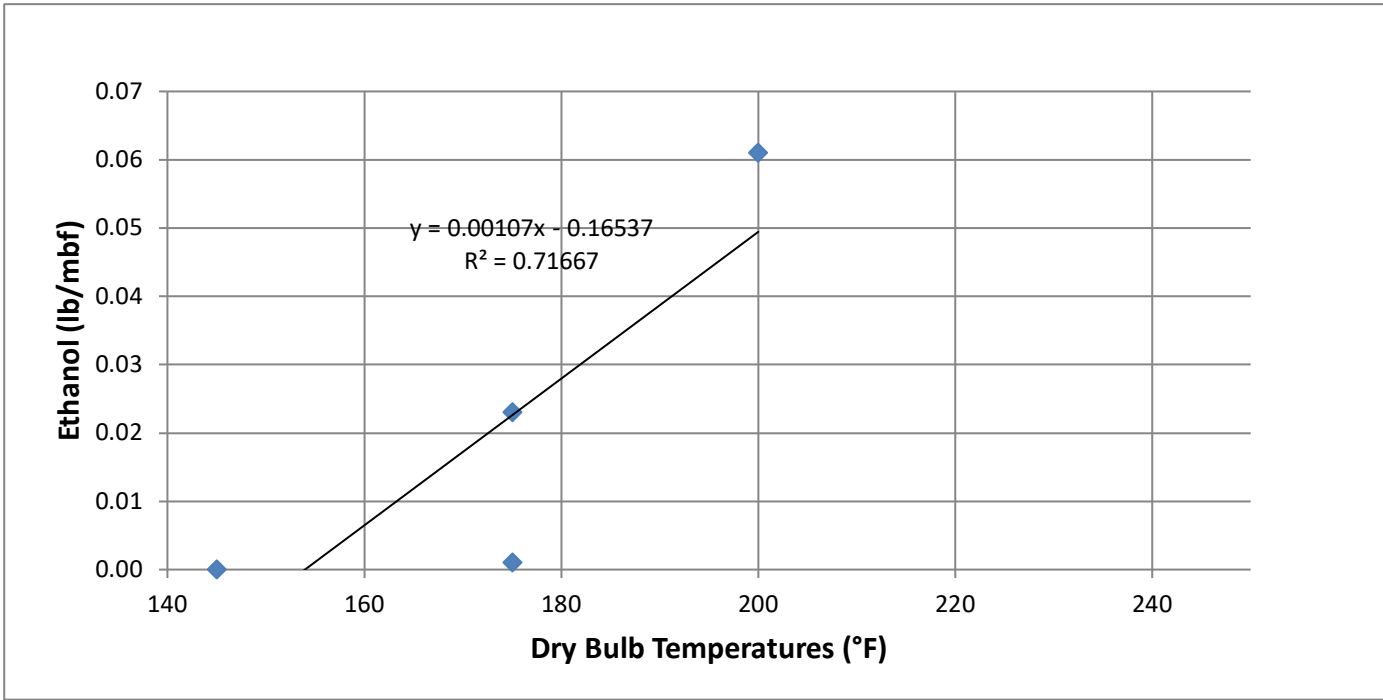

Step Six: Calculate/Compile Douglas Fir Speciated Non-HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing

Maximum Dry Bulb Temperature (°F)	Ethanol ¹ (lb/mbf)	Acetic Acid (lb/mbf)
145	0	0.1610
160	0.00583	
170	0.01653	
175	0.02188	
180	0.02723	
200	0.04863	
220	0.07003	
235	0.08608	

¹ Ethanol EF = 0.00107x - 0.16537; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Step Seven: Convert Douglas Fir Speciated HAP and Non-HAP Emission Factors to "as Carbon" and Total

Speciated Compound "X" expressed as carbon = (RF_x) X (SC_x) X [(MW_C) / (MW_x)] X [(#C_x) / (#C_C)]
where: RF_x represents the flame ionization detector (FID) response factor (RF) for speciated compound "X"
SC_x represents emissions of speciated compound "X" expressed as the entire mass of compound emitted
MW_C equals "12.0110" representing the molecular weight (MW) for carbon as carbon is becoming the "basis" for expressing mass of speciated compound "X"
MW_x represents the molecular weight for speciated compound "X"
#C_x represents the number of carbon atoms in speciated compound "X"
#C_C equals "1" as the single carbon atom is becoming the "basis" for expressing mass of speciated compound "X"

Maximum Dry Bulb Temperature (°F)	Methanol as Carbon (lb/mbf)	Formaldehyde as Carbon (lb/mbf)	Acetaldehyde as Carbon (lb/mbf)	Propionaldehyde as Carbon (lb/mbf)	Acrolein as Carbon (lb/mbf)	Ethanol as Carbon (lb/mbf)	Acetic Acid as Carbon (lb/mbf)	Speciated Compounds as Carbon (lb/mbf)
145	0.0012	0	0.0075	0.0001	0.0002	0	0.0370	0.0461
160	0.0058	0				0.0020		0.0527
170	0.0089	0				0.0057		0.0594
175	0.0104	0				0.0075		0.0628
180	0.0120	0				0.0094		0.0662
200	0.0181	0				0.0167		0.0797
220	0.0243	0				0.0241		0.0932
235	0.0289	0				0.0296		0.1034

SUM→

Element and Compound Information

Element / Compound	FID RF ¹	Molecular Weight (lb/lb-mol)	Formula	Number of Carbon Atoms	Number of Hydrogen Atoms	Number of Oxygen Atoms	Reference
Methanol	0.72	32.042	CH ₄ O	1	4	1	1
Formaldehyde	0	30.0262	CH ₂ O	1	2	1	16
Acetaldehyde	0.5	44.053	C ₂ H ₄ O	2	4	1	20
Propionaldehyde	0.66	58.0798	C ₃ H ₆ O	3	6	1	20
Acrolein	0.66	56.064	C ₃ H ₄ O	3	4	1	20
Ethanol	0.66	46.0688	C ₂ H ₆ O	2	6	1	1
Acetic Acid	0.575	60.0524	C ₂ H ₄ O ₂	2	4	2	1
Propane	1	44.0962	C ₃ H ₈	3	8	0	16
Carbon	-	12.0110	C	1	-	-	-
Hydrogen	-	1.0079	H	-	1	-	-
Oxygen	-	15.9994	O	-	-	1	-

¹ FID RF = volumetric concentration or "instrument display" / compound's actual known concentration. Numerator and denominator expressed on same basis (ie. carbon, propane, etc) and concentration in units of "ppm."

Step Eight: Subtract Speciated HAP and Non-HAP Compounds from Douglas Fir VOC Emission Factors and Convert Result to "as Propane"

FROM STEP TWO		FROM STEP SIX		Method 25A VOC as Carbon without Speciated Compounds (lb/mbf)		Method 25A VOC as Propane without Speciated Compounds (lb/mbf)	
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)	Speciated Compounds as Carbon (lb/mbf)					
145	0.1995	0.0461		0.1535		0.1878	
160	0.4240	0.0527		0.3713		0.4544	
160	0.4573	0.0527		0.4046		0.4951	
160	0.3741	0.0527		0.3214		0.3934	
160	0.3824	0.0527		0.3298		0.4035	
170	0.5404	0.0594		0.4810		0.5886	
170	0.1995	0.0594		0.1401		0.1714	
175	0.1538	0.0628		0.0910		0.1114	
175	0.7150	0.0628		0.6522		0.7981	
180	0.9420	0.0662		0.8758		1.0718	
180	0.6690	0.0662		0.6028		0.7377	
180	0.2100	0.0662		0.1438		0.1760	
180	0.4780	0.0662		0.4118		0.5040	
180	0.3242	0.0662		0.2580		0.3158	
180	0.7025	0.0662		0.6363		0.7787	
200	0.5878	0.0797		0.5081		0.6218	
200	0.7308	0.0797		0.6511		0.7968	
200	0.5487	0.0797		0.4690		0.5739	
220	1.2000	0.0932		1.1068		1.3544	
220	1.3000	0.0932		1.2068		1.4768	
235	1.0026	0.1034		0.8993		1.1005	

MINUS

EQUALS

Propane Mass Conversion Factor

X 1.2238 =

Method 25A VOC as propane without speciated compounds = (VOC_C) X (1/RF_{C_{3H₈}) X [(MW_{C_{3H₈}) / (MW_C)] X [(#C_C) / (#C_{C_{3H₈})]}}}

where: VOC_C represents Method 25A VOC as carbon without speciated compounds

RF_{C_{3H₈}} equals "1" and represents the FID RF for propane. All alkanes, including propane, have a RF of 1.

MW_{C_{3H₈}} equals "44.0962" and represents the molecular weight for propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

MW_C equals "12.0110" and represents the molecular weight for carbon

#C_C equals "1" as the single carbon atom was the "basis" for which Method 25A VOC test results were determined as illustrated in Step One of this spreadsheet

#C_{C_{3H₈}} equals "3" as three carbon atoms are present within propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

Note: The following portion from the equation immediately above, (1/RF_{C_{3H₈}}) X [(MW_{C_{3H₈}) / (MW_C)] X [(#C_C) / (#C_{C_{3H₈})], equals 1.2238 and can be referred to as the "propane mass conversion factor."}}

Step Nine: Calculate WPP1 VOC by Adding Speciated HAP and Non-HAP Compounds to Douglas Fir VOC Emission Factors "as Propane"

WPP1 VOC = Method 25A VOC as propane without speciated compounds + ∑ speciated compounds expressed as the entire mass of compound


FROM STEP EIGHT		FROM STEP THREE					FROM STEP SIX		WPP1 VOC (lb/mbf)
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)	
145	0.1878	0.0044	0.0003				0		0.3818
160	0.4544	0.0215	0.0007				0.0058		0.6717
160	0.4951	0.0215	0.0007				0.0058		0.7124
160	0.3934	0.0215	0.0007				0.0058		0.6107
160	0.4035	0.0215	0.0007				0.0058		0.6209
170	0.5886	0.0329	0.0010				0.0165		0.8283
170	0.1714	0.0329	0.0010				0.0165		0.4111
175	0.1114	0.0386	0.0011				0.0219		0.3622
175	0.7981	0.0386	0.0011				0.0219		1.0490
180	1.0718	0.0443	0.0012				0.0272		1.3339
180	0.7377	0.0443	0.0012	0.0275	0.0003	0.0005	0.0272	0.1610	0.9998
180	0.1760	0.0443	0.0012				0.0272		0.4381
180	0.5040	0.0443	0.0012				0.0272		0.7661
180	0.3158	0.0443	0.0012				0.0272		0.5779
180	0.7787	0.0443	0.0012				0.0272		1.0408
200	0.6218	0.0671	0.0018				0.0486		0.9286
200	0.7968	0.0671	0.0018				0.0486		1.1036
200	0.5739	0.0671	0.0018				0.0486		0.8808
220	1.3544	0.0899	0.0024				0.0700		1.7060
220	1.4768	0.0899	0.0024				0.0700		1.8284
235	1.1005	0.1070	0.0028				0.0861		1.4857

PLUS

EQUALS

Step Ten: Generate Douglas Fir Best-Fit Linear Equation with Dependent Variable Maximum Drying Temperature to Model WPP1 VOC Emissions

WPP1 VOC (lb/mbf): $0.01460x - 1.77130$; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber

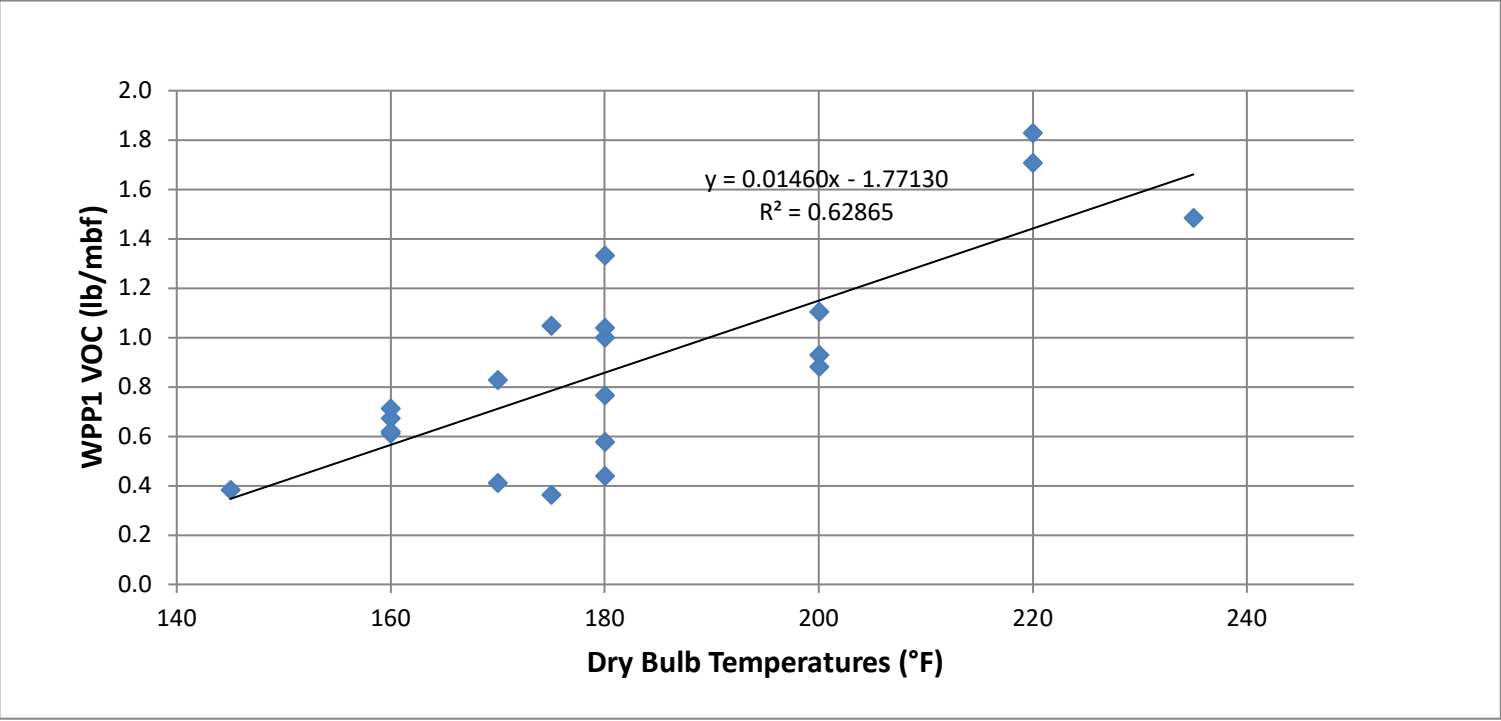

Hazardous Air Pollutant Emission Factors for Drying Engelmann Spruce Lumber

This sheet presents lab-scale test data and calculations used to create HAP EF for engelmann spruce lumber in an indirect steam-heated batch kiln. EPA Region 10 is not aware of any HAP emission testing of englemann spruce. When actual test data is not available, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted. In the absence of engelmann spruce test data, white spruce test data has been substituted. The two wood species are similar in that both are resinous softwood species in the scientific classification genus Picea.

The methanol and formaldehyde EF are temperature dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The acetaldehyde, propionaldehyde and acrolein EF are calculated by averaging test results.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Engelmann Spruce (White Spruce Substitution) HAP Emission Test Data by Drying Temperature

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Lumber Dimensions	Moisture Content ¹ (%) (Initial / Final)	Time to Final Moisture Content (hours)	HAP Sample Collection Technique	Reference
180	0.025	0.0013	0.036	0.0003	0.0005	2x4 or 2x6	33.5 / 15	no data	NCASI Method 105	18
235	0.078	0.0044	0.031	0.0007	0.001	2x4 or 2x6	32.7 / 15	no data		

¹ Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Engelmann Spruce (White Spruce Substitution) HAP Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
180	0.023	0.0010	0.022	0.0001	0.0003
235	0.071	0.0032	0.019	0.0002	0.0007

Adjusted OSU emission test data value_i = (OSU reported emission test data value_i) X (NCASI TB No. 845 study full-scale kiln value_i/NCASI TB No. 845 study OSU small-scale kiln value_i)

where: OSU reported emission test data value_i is the emission rate "lb/mbf" for compound "i" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.



NCASI TB No. 845 - Emission Rate (lb/mbf)					
	Methanol	Formaldehyde	Acetaldehyde	Propionaldehyde	Acrolein
Full-Scale Kiln	0.205	0.0155	0.039	0.001	0.006
OSU Kiln	0.225	0.0210	0.065	0.003	0.009

Step Three: Calculate Engelmann Spruce (White Spruce Substitution) HAP Emission Factors

Methanol ¹ (lb/mbf)	Formaldehyde ¹ (lb/mbf)	Acetaldehyde ² (lb/mbf)	Propionaldehyde ² (lb/mbf)	Acrolein ² (lb/mbf)
0.00088x - 0.13526	0.000042x - 0.006529	0.0201	0.0002	0.0005

¹ Because methanol and formaldehyde emissions are dependent upon drying temperature, best-fit linear equations model emissions with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

² Because acetaldehyde, propionaldehyde and acrolein emissions across different species are not consistently dependent upon maximum drying temperature, EF are calculated by averaging test results.

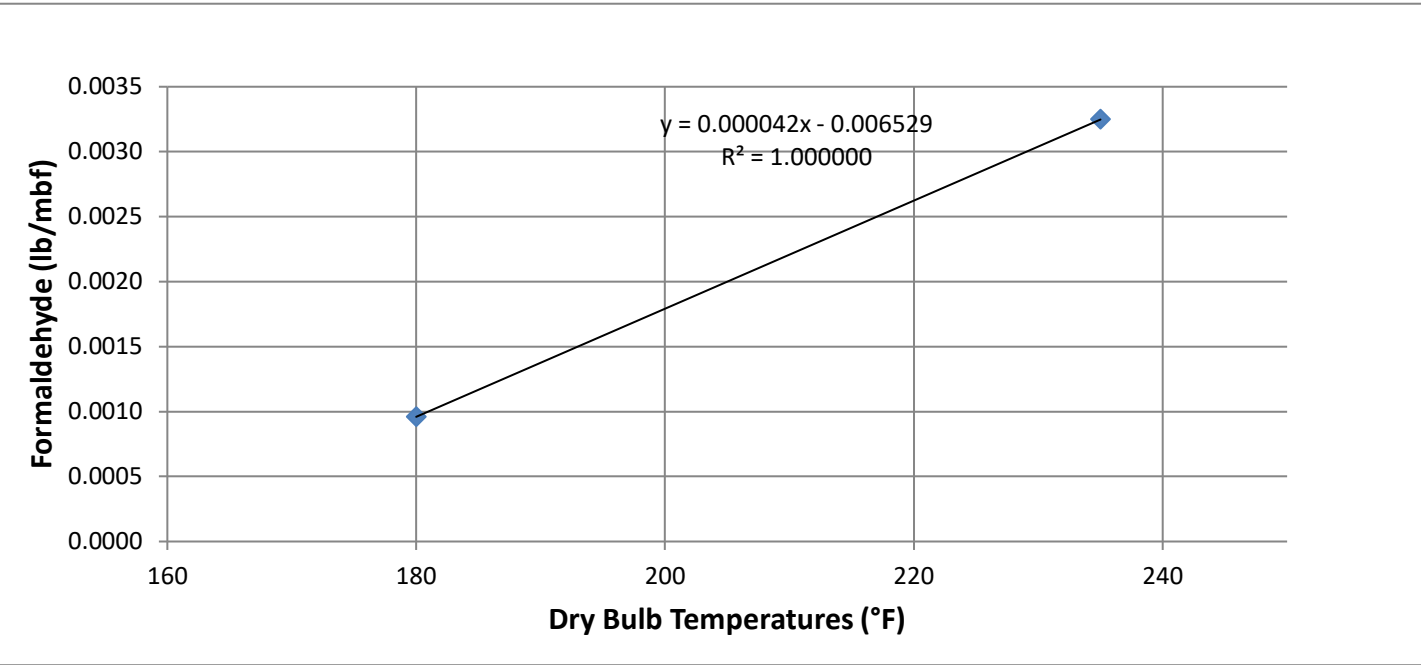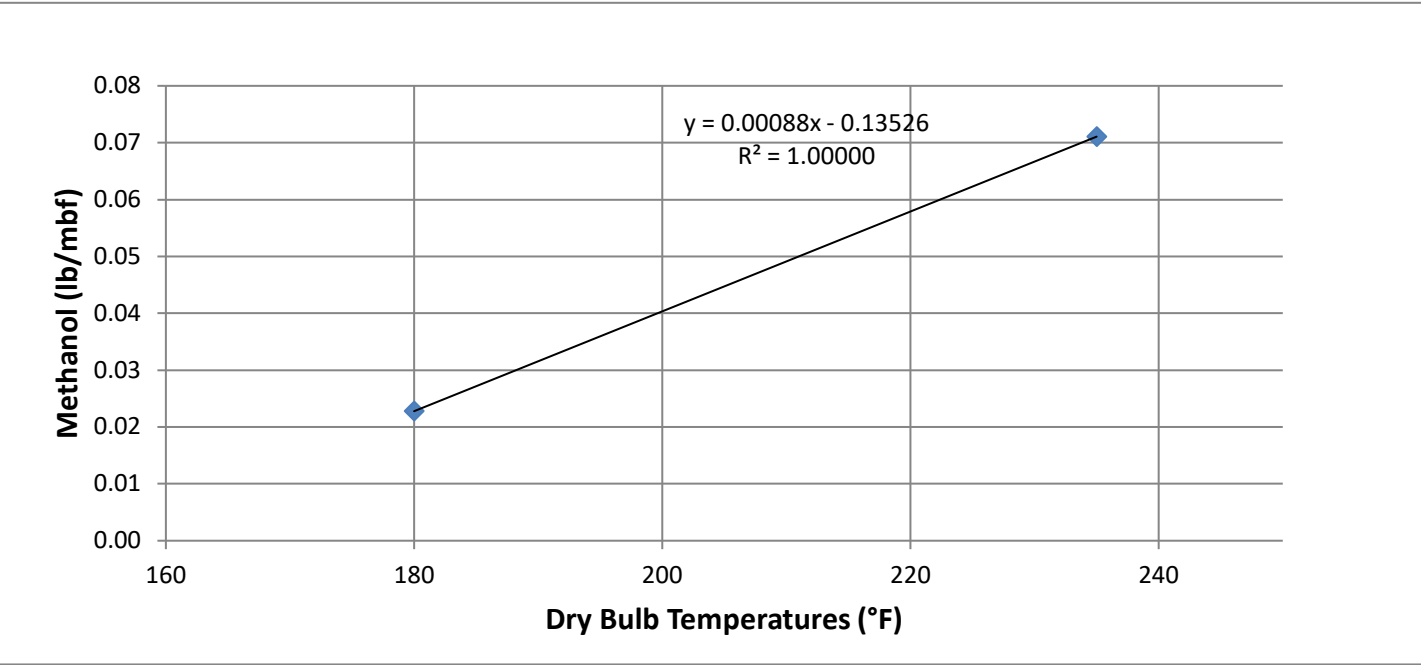

Volatile Organic Compound Emission Factors for Drying Engelmann Spruce Lumber

This sheet presents lab-scale EPA Reference Method 25A (RM25A) and speciated VOC test data and calculations used to create VOC EF for drying white spruce lumber in an indirect steam-heated batch kiln. EPA Region 10 is not aware of any HAP or VOC emission testing of englemann spruce. When actual test data is not available, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted. In the absence of engelmann spruce test data, white spruce test data has been substituted. The two wood species are similar in that both are resinous softwood species in the scientific classification genus Picea. Although only one RM25A VOC test was performed while drying white spruce, it was performed while drying lumber at a relatively high maximum temperature of 235°F. Because emissions increase with maximum drying temperature, employing an EF based upon testing at 235°F would overreport emissions when drying at maximum drying temperatures less than than 235°F.

RM25A has some limitations in that it misses some pollutant compounds (or portions thereof) that are VOC and known to exist and reports the results “as carbon” which only accounts for the carbon portion of each compound measured. The missed pollutant compounds (some HAP and some non-HAP) are accounted for through separate testing. RM25A test data is adjusted to fully account for five known pollutant compounds that are VOC using separate speciated test data and is reported “as propane” to better represent all of the unspciated VOC compounds. This technique is consistent with EPA’s Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 (WPP1 VOC) except that the RM25A results are adjusted to account for not only methanol and formaldehyde but also for acetaldehyde, propionaldehyde and acrolein in this case.

More specifically, one VOC emission rate is calculated based upon underlying RM25A and speciated VOC test data as indicated above. Temperature-specific methanol and formaldehyde emission rates are calculated for each temperature at which RM25A testing was performed using temperature-dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The temperature-independent acetaldehyde, propionaldehyde and acrolein emission rates reflect the average of all test results independent of the temperature of heated air entering the lumber. EPA Region 10 is not aware of any further speciated VOC test data. That portion of the (speciated) VOC compounds that are measured by the RM25A test method (based on known flame ionization detector response factors) is subtracted from the RM25A measured emission rate. The remaining “unspciated” RM25A emission rate is adjusted to represent propane rather than carbon and then added to the speciated VOC emission rate to provide the “total” temperature-specific VOC emission rate.

Note that reporting the unspciated VOC as propane (mass-to-carbon ratio of 1.22 and a response factor of 1) may underestimate the actual mass of VOC for certain wood species because VOC compounds like ethanol and acetic acid with higher mass-to-carbon ratios (1.92 and 2.5, respectively) and lower response factors (0.66 and 0.575, respectively) can be a significant portion of the total VOC. Based upon the mass-to-carbon ratios and response factors noted above, 1 lb/mbf ethanol is reported as 0.4194 lb/mbf propane and 1 lb/mbf acetic acid is reported as 0.2806 lb/mbf propane through the use of EPA Reference Method 25A unless compound-specific sampling and analysis is performed. The contribution of ethanol and acetic acid has been quantified through sampling and analysis for douglas fir and ponderosa pine. For douglas fir, ethanol's contribution over three tests was measured to be 0, 1.4 and 5.4 percent of WPP1 VOC, and acetic acid's contribution over the same three tests was measured to be 37, 20 and 13 percent of WPP1 VOC. For ponderosa pine, ethanol's contribution over one test was measured to be 32 percent of WPP1 VOC, and acetic acid's contribution over the same test was measured to be 6.4 percent. Without white spruce lumber drying test data for ethanol and acetic acid, EPA assumes propane adequately represents the mix of unspciated VOC.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company’s October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Engelmann Spruce (White Spruce Substitution) RM25A VOC Emission Test Data by Drying Temperature

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)	Lumber Dimensions	Moisture Content ¹ (%) (Initial/Final)	Time to Final Moisture Content (hours)	Method 25A Analyzer	Reference
235	0.11	2x4 or 2x6	32.7 / 15	no data	JUM VE-7	18

¹ Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Engelmann Spruce (White Spruce Substitution) VOC Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)
235	0.09

Adjusted OSU emission test data value = (OSU reported emission test data value) X (NCASI TB No. 845 study full-scale kiln value/NCASI TB No. 845 study OSU small-scale kiln value)

where: OSU reported emission test data value is the RM25A VOC as carbon emission rate "lb/mbf" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.

	NCASI TB No. 845 - Emission Rate (lb/mbf)
	RM25A VOC as carbon
Full-Scale Kiln	3.53333
OSU Kiln	4.25000

Step Three: Calculate/Compile Engelmann Spruce (White Spruce Substitution) Speciated HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
235	0.0715	0.0033	0.0201	0.0002	0.0005

¹ See engelmann spruce HAP sheet for lab-scale test data and calculations.

² Methanol EF = 0.00088x - 0.13526; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

³ Formaldehyde EF = 0.000042x - 0.006529; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Step Four: Compile Engelmann Spruce (White Spruce Substitution) Speciated Non-HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing

Maximum Dry Bulb Temperature (°F)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)
235	no data	no data

Step Five: Convert Engelmann Spruce (White Spruce Substitution) Speciated HAP Emission Factors to "as Carbon" and Total

Speciated Compound "X" expressed as carbon = (RF_X) X (SC_X) X [(MW_C) / (MW_X)] X [(#C_X) / (#C_C)]

where: RF_X represents the flame ionization detector (FID) response factor (RF) for speciated compound "X"

SC_X represents emissions of speciated compound "X" expressed as the entire mass of compound emitted

MW_C equals "12.0110" representing the molecular weight (MW) for carbon as carbon is becoming the "basis" for expressing mass of speciated compound "X"

MW_X represents the molecular weight for speciated compound "X"

#C_X represents the number of carbon atoms in speciated compound "X"

#C_C equals "1" as the single carbon atom is becoming the "basis" for expressing mass of speciated compound "X"

Maximum Dry Bulb Temperature (°F)	Methanol as Carbon (lb/mbf)	Formaldehyde as Carbon (lb/mbf)	Acetaldehyde as Carbon (lb/mbf)	Propionaldehyde as Carbon (lb/mbf)	Acrolein as Carbon (lb/mbf)	Ethanol as Carbon (lb/mbf)	Acetic Acid as Carbon (lb/mbf)	Speciated Compounds as Carbon (lb/mbf)
235	0.0193	0	0.0055	0.0001	0.0002	no data	no data	0.0251

SUM



Element and Compound Information

Element / Compound	FID RF ¹	Molecular Weight (lb/lb-mol)	Formula	Number of Carbon Atoms	Number of Hydrogen Atoms	Number of Oxygen Atoms	Reference
Methanol	0.72	32.042	CH ₄ O	1	4	1	1
Formaldehyde	0	30.0262	CH ₂ O	1	2	1	16
Acetaldehyde	0.5	44.053	C ₂ H ₄ O	2	4	1	20
Propionaldehyde	0.66	58.0798	C ₃ H ₆ O	3	6	1	20
Acrolein	0.66	56.064	C ₃ H ₄ O	3	4	1	20
Ethanol	0.66	46.0688	C ₂ H ₆ O	2	6	1	1
Acetic Acid	0.575	60.0524	C ₂ H ₄ O ₂	2	4	2	1
Propane	1	44.0962	C ₃ H ₈	3	8	0	16
Carbon	-	12.0110	C	1	-	-	-
Hydrogen	-	1.0079	H	-	1	-	-
Oxygen	-	15.9994	O	-	-	1	-

¹ FID RF = volumetric concentration or "instrument display" / compound's actual known concentration. Numerator and denominator expressed on same basis (ie. carbon, propane, etc) and concentration in units of "ppm."

Step Six: Subtract Speciated HAP and Non-HAP Compounds from Engelmann Spruce (White Spruce Substitution) VOC Emission Factors and Convert Result to "as Propane"

Maximum Dry Bulb Temperature (°F)	FROM STEP TWO Method 25A VOC as Carbon (lb/mbf)	MINUS	FROM STEP FIVE Speciated Compounds as Carbon (lb/mbf)	EQUALS	Method 25A VOC as Carbon without Speciated Compounds (lb/mbf)	Propane Mass Conversion	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)
235	0.0915		0.0251		0.0664	X 1.2238 =	0.0812

Method 25A VOC as propane without speciated compounds = (VOC_C) X (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})]

where: VOC_C represents Method 25A VOC as carbon without speciated compounds

RF_{C3H8} equals "1" and represents the FID RF for propane. All alkanes, including propane, have a RF of 1.

MW_{C3H8} equals "44.0962" and represents the molecular weight for propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

MW_C equals "12.0110" and represents the molecular weight for carbon

#C_C equals "1" as the single carbon atom was the "basis" for which Method 25A VOC test results were determined as illustrated in Step One of this spreadsheet

#C_{C3H8} equals "3" as three carbon atoms are present within propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

Note: The following portion from the equation immediately above, (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})], equals 1.2238 and can be referred to as the "propane mass conversion factor."

Step Seven: Calculate WPP1 VOC by Adding Speciated HAP and Non-HAP Compounds to Engelmann Spruce (White Spruce Substitution) VOC Emission Factors "as Propane"

WPP1 VOC = Method 25A VOC as propane without speciated compounds + ∑ speciated compounds expressed as the entire mass of compound

Maximum Dry Bulb Temperature (°F)	FROM STEP SIX Method 25A VOC as Propane without Speciated Compounds (lb/mbf)	PLUS	FROM STEP THREE					PLUS	FROM STEP FOUR		EQUALS	WPP1 VOC (lb/mbf)
			Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)		Ethanol (lb/mbf)	Acetic Acid (lb/mbf)		
235	0.0812		0.0715	0.0033	0.0201	0.0002	0.0005		no data	no data		0.1769

Hazardous Air Pollutant Emission Factors for Drying Larch Lumber

This sheet presents the HAP EF for drying larch lumber. EPA Region 10 is not aware of any HAP emission testing of larch. Consistent with other species, when actual test data is not available, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted.

In the absence of larch test data, douglas fir test data has been substituted. Larch is similar to douglas fir, engelmann spruce, white spruce, lodgepole pine, ponderosa pine and western white pine in that all seven species are resinous softwood species in the scientific classification order Pinaceae, but larch does not share a common genus with any of these species. It appears to be most similar to douglas fir, engelmann spruce and white spruce in that the four species have small, sparse resin canals as opposed to the large numerous resin canals of the pines. See http://www.faculty.sfasu.edu/mcbroommatth/lectures/wood_science/lab_2_resin_canal_species.pdf. While the white spruce EF for formaldehyde is greater than that of douglas fir at high drying temperatures, the opposite is true at low drying temperatures. The douglas fir EF equation for formaldehyde is based upon seven tests while the white spruce EF equation is based upon two. All other HAP EF are greater for douglas fir at all drying temperatures. Under the circumstances, EPA Region 10 has decided to substitute the douglas fir formaldehyde EF equation. See the white spruce (appearing under engelmann spruce tab) and douglas fir HAP sheets for lab-scale test data and calculations.

Larch (Douglas Fir Substitution) HAP Emission Factors

Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
0.00114x - 0.16090	0.000028x - 0.003800	0.0275	0.0003	0.0005

Volatile Organic Compound Emission Factors for Drying Larch Lumber

This sheet presents the VOC EF for drying larch lumber. EPA Region 10 is not aware of any VOC emission testing of larch. When actual test data is not available, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted.

In the absence of larch test data, douglas fir test data has been substituted. Larch is similar to douglas fir, engelmann spruce, white spruce, lodgepole pine, ponderosa pine and western white pine in that all seven species are resinous softwood species in the scientific classification order Pinaceae, but larch does not share a common genus with any of these species. It appears to be most similar to douglas fir, engelmann spruce and white spruce in that the four species have small, sparse resin canals as opposed to the large numerous resin canals of the pines. See http://www.faculty.sfasu.edu/mcbroommatth/lectures/wood_science/lab_2_resin_canal_species.pdf. Because the douglas fir EF is greater than that of white spruce (and EPA Region 10 is not aware of any VOC test data for engelmann spruce), the douglas fir EF has been substituted. See the douglas fir VOC sheet for lab-scale test data and calculations.

Larch (Douglas Fir Substitution) WPP1 VOC Emission Factor

VOC (lb/mbf): 0.01460x - 1.77130 ; where x is maximum drying temperature in °F

Hazardous Air Pollutant Emission Factors for Drying Lodgepole Pine Lumber

This sheet presents lab-scale test data and calculations used to create HAP EF for drying lodgepole pine lumber in an indirect steam-heated batch kiln. The EF are calculated by averaging test results. Lodgepole pine testing was performed while drying lumber at a relatively high maximum temperature of around 237°F. Because emissions increase with maximum drying temperature, employing an EF based upon testing at 237°F would overreport emissions when drying at maximum drying temperatures less than than 237°F.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Lodgepole Pine HAP Emission Test Data by Drying Temperature¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Lumber Dimensions	Moisture Content ² (%) (Initial / Final)	Time to Final Moisture Content (hours)	HAP Sample Collection Technique	Reference
195	0.073	no data	0.012	no data	no data	no data	no data	no data	no data	14
195	0.092	no data	no data	no data	no data	no data	no data	no data	no data	
195	0.064	no data	no data	no data	no data	no data	no data	no data	no data	
195	0.028	no data	no data	no data	no data	no data	no data	no data	no data	
195	0.02	no data	no data	no data	no data	no data	no data	no data	no data	
≤ 200°F	no data									
236	0.063	0.0041	no data	no data	no data	2x4	59.1 / 15	16	NCASI Method IM/CAN/WP-99.01 without cannisters.	3, 4, 12, 14
237	0.062	0.0041	no data	no data	no data	2x4	59.7 / 15	16.6		
238	0.056	0.0039	no data	no data	no data	2x4	56.9 / 15	16		

¹ Blue highlight denotes data not considered by EPA Region 10 in 2012. Five test runs considered by EPA Region 10 in 2007 are not considered here due to lack of documentation. The omitted test values are presented in Oregon Department of Environmental Quality memorandum May 8, 2007 entitled, "Title III Implications of Drying Kiln Source Test Results." The memorandum lists "Forintec #1, #2 and #5" along with "OSU QA # 1 and #2 " as the test data sources.

² Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Lodgepole Pine VOC Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
236	0.057	0.0030	no data	no data	no data
237	0.056	0.0030	no data	no data	no data
238	0.051	0.0029	no data	no data	no data

Adjusted OSU emission test data value_i = (OSU reported emission test data value_i) X (NCASI TB No. 845 study full-scale kiln value_i/NCASI TB No. 845 study OSU small-scale kiln value_i)

where: OSU reported emission test data value_i is the emission rate "lb/mbf" for compound "i" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.

NCASI TB No. 845 - Emission Rate (lb/mbf)					
	Methanol	Formaldehyde	Acetaldehyde	Propionaldehyde	Acrolein
Full-Scale Kiln	0.205	0.0155	0.039	0.001	0.006
OSU Kiln	0.225	0.0210	0.065	0.003	0.009

Step Three: Calculate Lodgepole Pine HAP Emission Factors

Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde ¹ (lb/mbf)	Propionaldehyde ¹ (lb/mbf)	Acrolein ¹ (lb/mbf)
0.0550	0.0030	0.0104	0.0003	0.0008

¹ Acetaldehyde, propionaldehyde and acrolein EF are not based upon lodgepole pine test data for those compounds. The EF are estimated using lodgepole pine VOC data and ponderosa pine VOC, acetaldehyde, propionaldehyde and acrolein test data as follows:

acetaldehyde lodgepole pine = (acetaldehyde ponderosa pine) * (VOC lodgepole pine) / (VOC ponderosa pine)

propionaldehyde lodgepole pine = (propionaldehyde ponderosa pine) * (VOC lodgepole pine) / (VOC ponderosa pine)

acrolein lodgepole pine = (acrolein ponderosa pine) * (VOC lodgepole pine) / (VOC ponderosa pine)

Emission Factor (lb/mbf)				
Species	240 F VOC	Acetaldehyde	Propionaldehyde	Acrolein
Lodgepole Pine	1.1352	0.0104	0.0003	0.0008
Ponderosa Pine	3.69891	0.0340	0.0010	0.0026

calculated values to estimate EF

Volatile Organic Compound Emission Factors for Drying Lodgepole Pine Lumber

This sheet presents lab-scale EPA Reference Method 25A (RM25A) and speciated VOC test data and calculations used to create VOC EF for drying lodgepole pine lumber in an indirect steam-heated batch kiln. Although three RM25A VOC tests were performed while drying lodgepole pine, they were performed while drying lumber at a relatively high maximum temperature of around 238°F. Because emissions increase with maximum drying temperature, employing an EF based upon testing at 238°F would overreport emissions when drying at maximum drying temperatures less than than 238°F.

RM25A has some limitations in that it misses some pollutant compounds (or portions thereof) that are VOC and known to exist and reports the results "as carbon" which only accounts for the carbon portion of each compound measured. The missed pollutant compounds (some HAP and some non-HAP) are accounted for through separate testing. RM25A test data is adjusted to fully account for two known pollutant compounds that are VOC using separate speciated test data and is reported "as propane" to better represent all of the unspciated VOC compounds. This technique is consistent with EPA's Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 (WPP1 VOC).

More specifically, one VOC emission rate is calculated based upon underlying RM25A and speciated VOC test data as indicated above. Temperature-specific methanol and formaldehyde emission rates are calculated for each temperature at which RM25A testing was performed using temperature-dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. EPA Region 10 is not aware of any further speciated VOC test data. That portion of the (speciated) VOC compounds that are measured by the RM25A test method (based on known flame ionization detector response factors) is subtracted from the RM25A measured emission rate. The remaining "unspeciated" RM25A emission rate is adjusted to represent propane rather than carbon and then added to the speciated VOC emission rate to provide the "total" temperature-specific VOC emission rate.

Note that reporting the unspciated VOC as propane (mass-to-carbon ratio of 1.22 and a response factor of 1) may underestimate the actual mass of VOC for certain wood species because VOC compounds like ethanol and acetic acid with higher mass-to-carbon ratios (1.92 and 2.5, respectively) and lower response factors (0.66 and 0.575, respectively) can be a significant portion of the total VOC. Based upon the mass-to-carbon ratios and response factors noted above, 1 lb/mbf ethanol is reported as 0.4194 lb/mbf propane and 1 lb/mbf acetic acid is reported as 0.2806 lb/mbf propane through the use of EPA Reference Method 25A unless compound-specific sampling and analysis is performed. The contribution of ethanol and acetic acid has been quantified through sampling and analysis for douglas fir and ponderosa pine. For douglas fir, ethanol's contribution over three tests was measured to be 0, 1.4 and 5.4 percent of WPP1 VOC, and acetic acid's contribution over the same three tests was measured to be 37, 20 and 13 percent of WPP1 VOC. For ponderosa pine, ethanol's contribution over one test was measured to be 32 percent of WPP1 VOC, and acetic acid's contribution over the same test was measured to be 6.4 percent. Without reliable lodgepole pine lumber drying test data for ethanol and acetic acid, EPA assumes propane adequately represents the mix of unspciated VOC.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Lodgepole Pine RM25A VOC Emission Test Data by Drying Temperature

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)	Lumber Dimensions	Moisture Content ¹ (%) (Initial/Final)	Time to Final Moisture Content (hours)	Method 25A Analyzer	Reference
236	1.17	2x4	59.1 / 15	16.01	JUM 3-200	3, 4, 12
238	0.87	2x4	56.9 / 15	16.01		
240	1.19	2x4	64.9 / 15	16.81		

¹ Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Calculate Lodgepole Pine VOC Emission Factor¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)
238	1.0767

¹ Three-run average.

Step Three: Adjust Ponderosa Pine VOC Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)
238	0.8951

Adjusted OSU emission test data value = (OSU reported emission test data value) X (NCASI TB No. 845 study full-scale kiln value/NCASI TB No. 845 study OSU small-scale kiln value)

where: OSU reported emission test data value is the RM25A VOC as carbon emission rate "lb/mbf" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according to the schedule employed by the full-scale kiln.

NCASI TB No. 845 - Emission Rate (lb/mbf)	
RM25A VOC as carbon	
Full-Scale Kiln	3.53333
OSU Kiln	4.25000

Step Four: Compile Lodgepole Pine Speciated HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing¹

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
238	0.0550	0.0030	no data	no data	no data

¹ See lodgepole pine HAP sheet for lab-scale test data and calculations.

Step Five: Compile Lodgepole Pine Speciated Non-HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing

Maximum Dry Bulb Temperature (°F)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)
238	no data	no data

Step Six: Convert Lodgepole Pine Speciated HAP Emission Factors to "as Carbon" and Total

Speciated Compound "X" expressed as carbon = (RF_X) X (SC_X) X [(MW_C) / (MW_X)] X [(#C_X) / (#C_C)]

where: RF_X represents the flame ionization detector (FID) response factor (RF) for speciated compound "X"

SC_X represents emissions of speciated compound "X" expressed as the entire mass of compound emitted

MW_C equals "12.0110" representing the molecular weight (MW) for carbon as carbon is becoming the "basis" for expressing mass of speciated compound "X"

MW_X represents the molecular weight for speciated compound "X"

#C_X represents the number of carbon atoms in speciated compound "X"

#C_C equals "1" as the single carbon atom is becoming the "basis" for expressing mass of speciated compound "X"

Maximum Dry Bulb Temperature (°F)	Methanol as Carbon (lb/mbf)	Formaldehyde as Carbon (lb/mbf)	Acetaldehyde as Carbon (lb/mbf)	Propionaldehyde as Carbon (lb/mbf)	Acrolein as Carbon (lb/mbf)	Ethanol as Carbon (lb/mbf)	Acetic Acid as Carbon (lb/mbf)		Speciated Compounds as Carbon (lb/mbf)
238	0.0148	0	no data	no data	no data	no data	no data	SUM ⇒	0.0148

Element and Compound Information

Element / Compound	FID RF ¹	Molecular Weight (lb/lb-mol)	Formula	Number of Carbon Atoms	Number of Hydrogen Atoms	Atoms	Reference
Methanol	0.72	32.042	CH ₄ O	1	4	1	1
Formaldehyde	0	30.0262	CH ₂ O	1	2	1	16
Acetaldehyde	0.5	44.053	C ₂ H ₄ O	2	4	1	20
Propionaldehyde	0.66	58.0798	C ₃ H ₆ O	3	6	1	20
Acrolein	0.66	56.064	C ₃ H ₄ O	3	4	1	20
Ethanol	0.66	46.0688	C ₂ H ₆ O	2	6	1	1
Acetic Acid	0.575	60.0524	C ₂ H ₄ O ₂	2	4	2	1
Propane	1	44.0962	C ₃ H ₈	3	8	0	16
Carbon	-	12.0110	C	1	-	-	-
Hydrogen	-	1.0079	H	-	1	-	-
Oxygen	-	15.9994	O	-	-	1	-

¹ FID RF = volumetric concentration or "instrument display" / compound's actual known concentration. Numerator and denominator expressed on same basis (ie. carbon, propane, etc) and concentration in units of "ppm."

Step Seven: Subtract Speciated HAP and Non-HAP Compounds from Lodgepole Pine VOC Emission Factors and Convert Result to "as Propane"

	FROM STEP THREE		FROM STEP SIX		Method 25A VOC as Carbon without Speciated Compounds (lb/mbf)		Method 25A VOC as Propane without Speciated Compounds (lb/mbf)
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)		Speciated Compounds as Carbon (lb/mbf)				
238	0.8951	MINUS ⇒	0.0148	EQUALS ⇒	0.8803	X 1.2238 =	1.0773

Method 25A VOC as propane without speciated compounds = (VOC_C) X (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})]
where: VOC_C represents Method 25A VOC as carbon without speciated compounds
RF_{C3H8} equals "1" and represents the FID RF for propane. All alkanes, including propane, have a RF of 1.
MW_{C3H8} equals "44.0962" and represents the molecular weight for propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC
MW_C equals "12.0110" and represents the molecular weight for carbon
#C_C equals "1" as the single carbon atom was the "basis" for which Method 25A VOC test results were determined as illustrated in Step One of this spreadsheet
#C_{C3H8} equals "3" as three carbon atoms are present within propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

Note: The following portion from the equation immediately above, (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})], equals 1.2238 and can be referred to as the "propane mass conversion factor."

Step Eight: Calculate WPP1 VOC by Adding Speciated HAP and Non-HAP Compounds to Lodgepole Pine VOC Emission Factors "as Propane"

WPP1 VOC = Method 25A VOC as propane without speciated compounds + ∑ speciated compounds expressed as the entire mass of compound

	FROM STEP SEVEN		FROM STEP FOUR						FROM STEP FIVE			WPP1 VOC (lb/mbf)
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)		Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)		Ethanol (lb/mbf)	Acetic Acid (lb/mbf)		
238	1.0773	PLUS ⇒	0.0550	0.0030	no data	no data	no data	PLUS ⇒	no data	no data	EQUALS ⇒	1.1352


The Problem: Missing Data for Lodgepole Pine Acetaldehyde, Propionaldehyde and Acrolein EF

Species	WPP1 VOC lb/mbf	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
Resinous Softwood Species (Pine Famiy)						
Lodgepole Pine	1.1352037	0.0550	0.0030	no data	no data	no data
Ponderosa Pine	0.02083x - 1.30029	0.00137x - 0.18979	0.000074x - 0.010457	0.0340	0.0010	0.0026


LP - Lodgepole Pine PP - Ponderosa Pine

Compounds Whose Emission Factors are Known for WTF


Acetaldehyde: CH3CHO
Aldehyde
MW: 44 g/g-mol
Boiling point: 70F @ 760 mmhg
Vapor pressure: 760 mmHg @ 68F

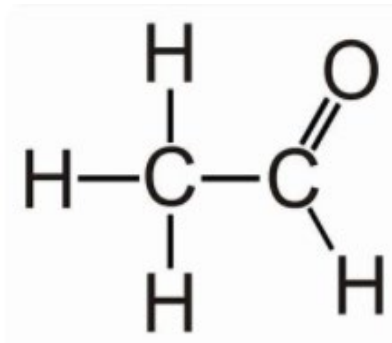

Methanol: CH3OH
Alcohol
MW: 32 g/g-mol
Boiler point: 149F @ 760 mmhg
Vapor pressure: 92 mmhg @ 68F




Formaldehyde: CH2O
Aldehyde
MW: 30 g/g-mol
Boiler point: -6F @ 760 mmhg
Vapor pressure: 3,890 mmhg @ 77F




Compounds Whose Emission Factors are Unknown for WTF

Propionaldehyde: CH3CH2CHO
Aldehyde
MW: 58 g/g-mol
Boiling point: 120F @ 760mmhg
Vapor pressure: 235 mmhg @ 68F

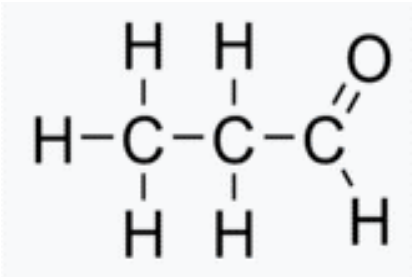

Acrolein: C3H4O
Unsaturated aldehyde
MW: 56 g/g-mol
Boiling Point: 126F @ 760 mmhg
Vapor pressure: 210 mmhg @ 68F

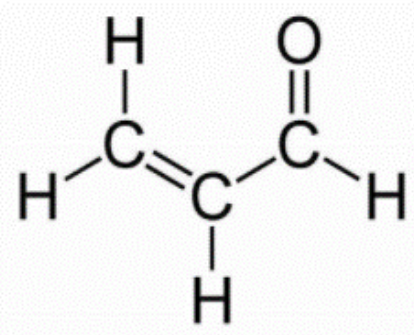

Option	LODGEPOLE PINE SUBSTITUTE EMISSION FACTOR (lb/mbf)					
	Acetaldehyde	Fraction of Default	Propionaldehyde	Fraction of Default	Acrolein	Fraction of Default
Default option: PP EF become LP EF	0.034	N/A	0.001	N/A	0.0026	N/A
Option A: Use formaldehyde (240F) as a basis	0.0139	0.41	0.0004	0.39	0.0011	0.41
Option B: Use methanol (240F) as a basis	0.0134	0.40	0.0004	0.38	0.0010	0.40
Option C: Use VOC (240F) as a basis	0.0104	0.31	0.0003	0.29	0.0008	0.31

Option A: Use formaldehyde (240F) as a basis

Acetaldehyde LP = (Acetaldehyde PP) * (Formaldehyde 240F LP) / (Formaldehyde 240F PP)
Propionaldehyde LP = (Propionaldehyde PP) * (Formaldehyde 240F LP) / (Formaldehyde 240F PP)
Acrolein LP = (Acrolein PP) * (Formaldehyde 240F LP) / (Formaldehyde 240F PP)

EMISSION FACTOR (lb/mbf)				
	240 F Formaldehyde	Acetaldehyde	Propionaldehyde	Acrolein
Lodgepole Pine	0.0030	0.0139	0.0004	0.0011
Ponderosa Pine	0.007303	0.0340	0.0010	0.0026

Option B: Use methanol (240F) as a basis

Acetaldehyde LP = (Acetaldehyde PP) * (Methanol 240F LP) / (Methanol 240F PP)
Propionaldehyde LP = (Propionaldehyde PP) * (Methanol 240F LP) / (Methanol 240F PP)
Acrolein LP = (Acrolein PP) * (Methanol 240F LP) / (Methanol 240F PP)

EMISSION FACTOR (lb/mbf)				
	240 F Methanol	Acetaldehyde	Propionaldehyde	Acrolein
Lodgepole Pine	0.0550	0.0134	0.0004	0.0010
Ponderosa Pine	0.13901	0.0340	0.0010	0.0026

Option C: Use VOC (240F) as a basis

Acetaldehyde LP = (Acetaldehyde PP) * (VOC 240F LP) / (VOC 240F PP)
Propionaldehyde LP = (Propionaldehyde PP) * (VOC 240F LP) / (VOC 240F PP)
Acrolein LP = (Acrolein PP) * (VOC 240F LP) / (VOC 240F PP)

EMISSION FACTOR (lb/mbf)				
	240 F VOC	Acetaldehyde	Propionaldehyde	Acrolein
Lodgepole Pine	1.1352	0.0104	0.0003	0.0008
Ponderosa Pine	3.69891	0.0340	0.0010	0.0026

Click on cell for calculation

Hazardous Air Pollutant Emission Factors for Drying Ponderosa Pine Lumber

This sheet presents lab-scale test data and calculations used to create HAP EF for drying ponderosa pine lumber in an indirect steam-heated batch kiln. The methanol and formaldehyde EF are temperature dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The acetaldehyde, propionaldehyde and acrolein EF are calculated by averaging test results.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Ponderosa Pine HAP Emission Test Data by Drying Temperature

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Lumber Dimensions	Moisture Content ¹ (%) (Initial / Final)	Time to Final Moisture Content (hours)	HAP Sample Collection Technique	Reference
170	0.035	0.0027	0.042	0.0019	0.0017	2x4	82.6 / 15	42	NCASI Method 105	17, 18
176	0.05	0.0022	no data	no data	no data	2x10 & 2x12	107.1 / 12	55	NCASI Method IM/CAN/WP-99.01 without cannisters	3, 4, 12, 14
176	0.08	0.0036	no data	no data	no data	2x10 & 2x12	124.1 / 12	57		
180	0.058	0.005	0.100	0.0035	0.0055	2x4	103.9 / 15	39.4	NCASI Method 105	Link to March 7, 2013 Hampton Affiliates - Randle Test Report
235	0.144	0.0092	0.028	0.0032	0.0045	2x4 or 2x6	89.1 / 15	19	NCASI Method 105	18, 21

¹ Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Ponderosa Pine HAP Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions

Maximum Dry Bulb Temperature (°F)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
170	0.032	0.0020	0.025	0.0006	0.0011
176	0.046	0.0016	no data	no data	no data
176	0.073	0.0027	no data	no data	no data
180	0.053	0.0037	0.060	0.0012	0.0037
235	0.131	0.0068	0.017	0.0011	0.0030

Adjusted OSU emission test data value_i = (OSU reported emission test data value_i) X (NCASI TB No. 845 study full-scale kiln value_i/NCASI TB No. 845 study OSU small-scale kiln value_i)

where: OSU reported emission test data value_i is the emission rate "lb/mbf" for compound "i" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value_i is the average emission rate "lb/mbf" for compound "i" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.



NCASI TB No. 845 - Emission Rate (lb/mbf)					
	Methanol	Formaldehyde	Acetaldehyde	Propionaldehyde	Acrolein
Full-Scale Kiln	0.205	0.0155	0.039	0.001	0.006
OSU Kiln	0.225	0.0210	0.065	0.003	0.009

Step Three: Calculate Ponderosa Pine HAP Emission Factors

Methanol ¹ (lb/mbf)	Formaldehyde ¹ (lb/mbf)	Acetaldehyde ² (lb/mbf)	Propionaldehyde ² (lb/mbf)	Acrolein ² (lb/mbf)
0.00137x - 0.18979	0.000074x - 0.010457	0.0340	0.0010	0.0026

¹ Best-fit linear equations with dependent variable maximum drying temperature entering the lumber

² Because acetaldehyde, propionaldehyde and acrolein emissions across different species are not consistently dependent upon maximum drying temperature, EF are calculated by averaging test results.

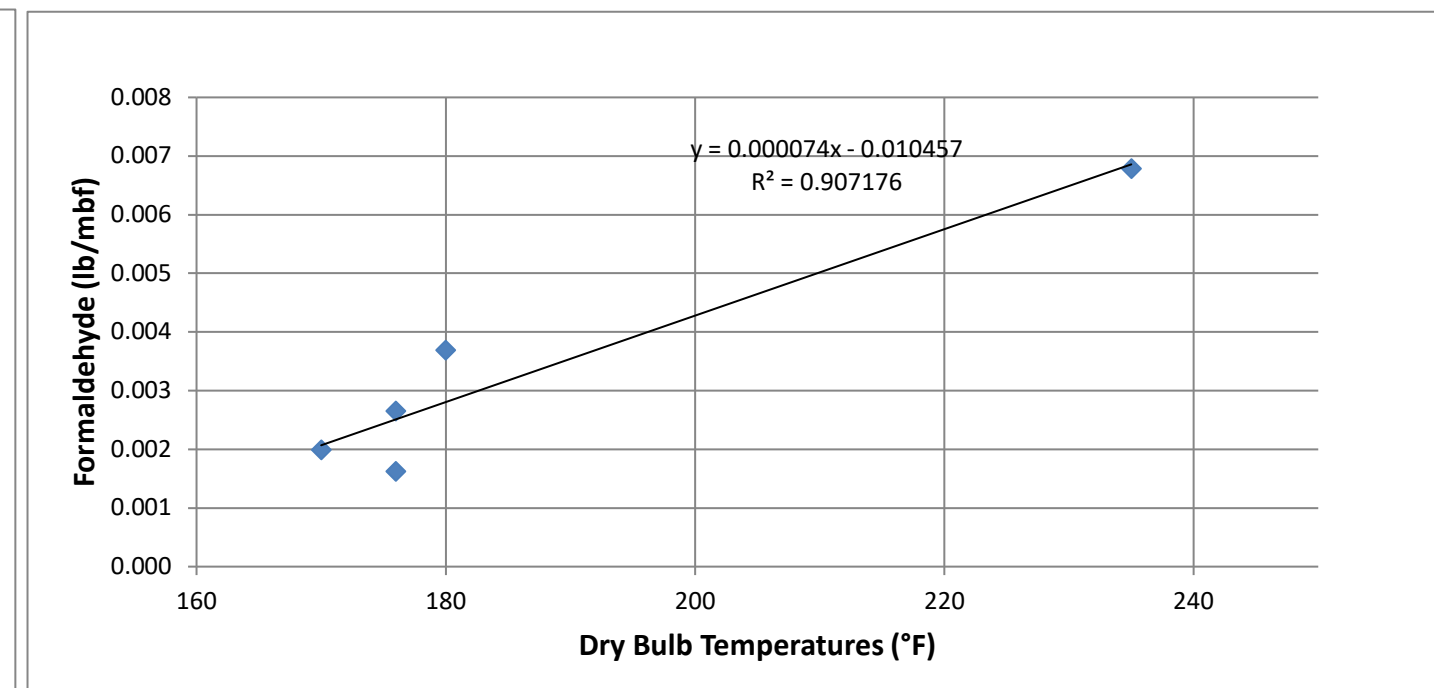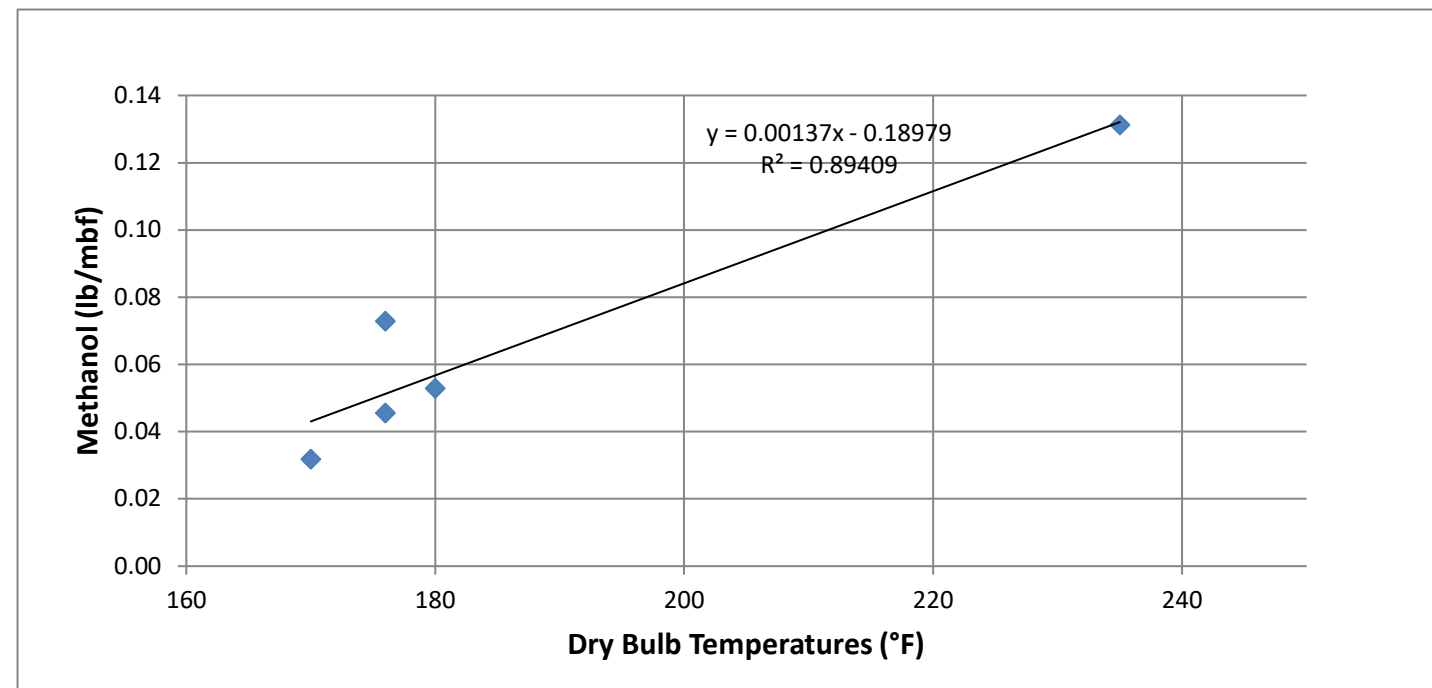

Volatile Organic Compound Emission Factors for Drying Ponderosa Pine Lumber

This sheet presents lab-scale EPA Reference Method 25A (RM25A) and speciated VOC test data and calculations used to create VOC EF for drying ponderosa pine lumber in an indirect steam-heated batch kiln. RM25A has some limitations in that it misses some pollutant compounds (or portions thereof) that are VOC and known to exist and reports the results "as carbon" which only accounts for the carbon portion of each compound measured. The missed pollutant compounds (some HAP and some non-HAP) are accounted for through separate testing. RM25A test data is adjusted to fully account for seven known pollutant compounds that are VOC using separate speciated test data and is reported "as propane" to better represent all of the unspciated VOC compounds. This technique is consistent with EPA's Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 (WPP1 VOC) except that the RM25A results are adjusted to account for not only methanol and formaldehyde but also for acetaldehyde, propionaldehyde, acrolein, ethanol and acetic acid in this case.

More specifically, ten separate drying-temperature-specific VOC emission rates (upon which a best-fit linear equation will be established) are calculated based upon underlying RM25A and speciated VOC test data as indicated above. Temperature-specific methanol and formaldehyde emission rates are calculated for each temperature at which RM25A testing was performed using temperature-dependent best-fit linear equations. The temperature variable reflects the maximum temperature of the heated air entering the lumber. The temperature-independent acetaldehyde, propionaldehyde and acrolein emission rates reflect the average of all test results independent of the temperature of heated air entering the lumber. The ethanol and acetic acid emission rates reflect the results of a single test. EPA Region 10 is not aware of any further speciated VOC test data. That portion of the (speciated) VOC compounds that are measured by the RM25A test method (based on known flame ionization detector response factors) is subtracted from the RM25A measured emission rate. The remaining "unspeciated" RM25A emission rate is adjusted to represent propane rather than carbon and then added to the speciated VOC emission rate to provide the "total" temperature-specific VOC emission rate. The resultant VOC EF is a 10-point best-fit linear equation with dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Test data generated through the use of the smaller of the two small-scale kilns at Oregon State University (OSU) has been adjusted to account for bias documented in NCASI's May 2002 Technical Bulletin No. 845 entitled, "A Comparative Study of VOC Emissions from Small-Scale and Full-Scale Lumber Kilns Drying Southern Pine." See last spreadsheet of this workbook for Stimson Lumber Company's October 18, 2019 letter to EPA Region 10 highlighting the bias.

Step One: Compile Ponderosa Pine RM25A VOC Emission Test Data by Drying Temperature¹

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)	Lumber Dimensions	Moisture Content ² (%) (Initial/Final)	Time to Final Moisture Content (hours)	Method 25A Analyzer	Reference
170	1.59	2x4	82.6 / 15	42	JUM VE-7	17, 18
170	1.795	1x4	112.8 / 15	29	JUM VE-7	2
170	1.925	1x4	88.7 / 15	28		
176	1.29	2x10 & 2x12	107.1 / 12	55	JUM 3-200	3, 4, 12
176	1.54	2x10 & 2x12	124.1 / 12	57		
176	1.40	2x10 & 2x12	114.8 / 12	58.5	JUM 3-200	3, 4
176	1.30	2x10 & 2x12	93.0 / 12	57.1		
180	1.48	2x4	103.9 / 15	39.4	JUM VE-7	Link to March 7, 2013 Hampton Affiliates - Randle Test Report
180	1.72	2x4	122.0 / 15	43.6		
235	3.00	2x4 or 2x6	89.1 / 15	19	JUM VE-7	18, 21

¹ Green highlight denotes data generated by testing conducted on the small-scale kiln at the University of Idaho. All other data was generated by testing conducted on the smaller of the two small-scale kilns at OSU.

² Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Two: Adjust Ponderosa Pine VOC Emission Test Data to Account for Bias in Underlying Small-Scale Kiln to Represent Full-Scale Kiln Emissions

Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)
170	1.32
170	1.795
170	1.925
176	1.07
176	1.28
176	1.16
176	1.08
180	1.23
180	1.43
235	2.49

¹ Green highlighted results from the test conducted at the University of Idaho have not been adjusted because the kiln was not calibrated to a full-scale kiln.

Adjusted OSU emission test data value = (OSU reported emission test data value) X (NCASI TB No. 845 study full-scale kiln value/NCASI TB No. 845 study OSU small-scale kiln value)

where: OSU reported emission test data value is the RM25A VOC as carbon emission rate "lb/mbf" documented in Step One (not highlighted in green)

NCASI study full-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in a full-scale indirect steam-heated batch lumber dry kiln

NCASI study OSU small-scale kiln value is the average RM25A VOC as carbon emission rate "lb/mbf" measured while drying southern yellow pine lumber in OSU's small-scale indirect steam-heated batch lumber dry kiln

The lumber dried in the OSU kiln was (a) extracted from the pool of lumber dried in the full-scale kiln and (b) dried according the schedule employed by the full-scale kiln.

NCASI TB No. 845 - Emission Rate (lb/mbf)

RM25A VOC as carbon

Full-Scale Kiln 3.53333

OSU Kiln 4.25000

Step Three: Calculate/Compile Ponderosa Pine Speciated HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A VOC Testing¹

Maximum Dry Bulb Temperature (°F)	Methanol ² (lb/mbf)	Formaldehyde ³ (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
170	0.0431	0.0021	0.0340	0.0010	0.0026
176	0.0513	0.0026			
180	0.0568	0.0029			
235	0.1322	0.0069			

¹ See ponderosa pine HAP sheet for lab-scale test data and calculations.

² Methanol EF = 0.00137x - 0.18979; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.
³ Formaldehyde EF = 0.000074x - 0.010457; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber.

Step Four: Compile Ponderosa Pine Speciated Non-HAP Emission Test Data by Drying Temperature

Maximum Dry Bulb Temperature (°F)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)	Lumber Dimensions	Moisture Content ¹ (%) (Initial / Final)	Time to Final Moisture Content (hours)	VOC Sample Collection Technique	Reference
180	0.826	0.162	2x4	103.9 / 15	39.4	NCASI Method 105	Link to March 7, 2013 Hampton Affiliates - Randle Test Report

¹ Dry basis. Moisture content = (weight of water / weight wood) x 100

Step Five: Calculate Ponderosa Pine Speciated Non-HAP Emission Factors


Ethanol (lb/mbf)	Acetic Acid (lb/mbf)
0.826	0.162

Step Six: Calculate/Compile Ponderosa Pine Speciated Non-HAP Emission Factors at Maximum Drying Temperatures Observed during RM25A Testing

Maximum Dry Bulb Temperature (°F)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)
170	0.826	0.162
176		
180		
235		

Step Seven: Convert Ponderosa Pine Speciated HAP and Non-HAP Emission Factors to "as Carbon" and Total

Speciated Compound "X" expressed as carbon = (RF_X) X (SC_X) X [(MW_C) / (MW_X)] X [(#C_X) / (#C_C)]
where: RF_X represents the flame ionization detector (FID) response factor (RF) for speciated compound "X"
SC_X represents emissions of speciated compound "X" expressed as the entire mass of compound emitted
MW_C equals "12.0110" representing the molecular weight (MW) for carbon as carbon is becoming the "basis" for expressing mass of speciated compound "X"
MW_X represents the molecular weight for speciated compound "X"
#C_X represents the number of carbon atoms in speciated compound "X"
#C_C equals "1" as the single carbon atom is becoming the "basis" for expressing mass of speciated compound "X"

Maximum Dry Bulb Temperature (°F)	Methanol as Carbon (lb/mbf)	Formaldehyde as Carbon (lb/mbf)	Acetaldehyde as Carbon (lb/mbf)	Propionaldehyde as Carbon (lb/mbf)	Acrolein as Carbon (lb/mbf)	Ethanol as Carbon (lb/mbf)	Acetic Acid as Carbon (lb/mbf)	SUM 	Speciated Compounds as Carbon (lb/mbf)
170	0.0116	0	0.0093	0.0004	0.0011	0.2843	0.0373		0.3461
176	0.0139	0							0.3487
180	0.0153	0							0.3505
235	0.0357	0							0.3749

Element and Compound Information

Element / Compound	FID RF ¹	Molecular Weight (lb/lb-mol)	Formula	Number of Carbon Atoms	Number of Hydrogen Atoms	Number of Oxygen Atoms	Reference
Methanol	0.72	32.042	CH ₄ O	1	4	1	1
Formaldehyde	0	30.0262	CH ₂ O	1	2	1	16
Acetaldehyde	0.5	44.053	C ₂ H ₄ O	2	4	1	20
Propionaldehyde	0.66	58.0798	C ₃ H ₆ O	3	6	1	20
Acrolein	0.66	56.064	C ₃ H ₄ O	3	4	1	20
Ethanol	0.66	46.0688	C ₂ H ₆ O	2	6	1	1
Acetic Acid	0.575	60.0524	C ₂ H ₄ O ₂	2	4	2	1
Propane	1	44.0962	C ₃ H ₈	3	8	0	16
Carbon	-	12.0110	C	1	-	-	-
Hydrogen	-	1.0079	H	-	1	-	-
Oxygen	-	15.9994	O	-	-	1	-

¹ FID RF = volumetric concentration or "instrument display" / compound's actual known concentration. Numerator and denominator expressed on same basis (ie. carbon, propane, etc) and concentration in units of "ppm."

Step Eight: Subtract Speciated HAP and Non-HAP Compounds from Ponderosa Pine VOC Emission Factors and Convert Result to "as Propane"

	FROM STEP TWO		FROM STEP SEVEN		
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Carbon (lb/mbf)		Speciated Compounds as Carbon (lb/mbf)	Method 25A VOC as Carbon without Speciated Compounds (lb/mbf)	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)
170	1.3219		0.3461	0.9758	1.1942
170	1.7950		0.3461	1.4489	1.7732

170	1.9250		0.3461		1.5789		1.9323
176	1.0725		0.3487		0.7238		0.8857
176	1.2803		0.3487		0.9316		1.1401
176	1.1639		0.3487		0.8152		0.9976
176	1.0808		0.3487		0.7321		0.8959
180	1.2304		0.3505		0.8799		1.0769
180	1.4300		0.3505		1.0795		1.3210
235	2.4941		0.3749		2.1192		2.5934

Method 25A VOC as propane without speciated compounds = (VOC_C) X (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})]
where: VOC_C represents Method 25A VOC as carbon without speciated compounds
RF_{C3H8} equals "1" and represents the FID RF for propane. All alkanes, including propane, have a RF of 1.
MW_{C3H8} equals "44.0962" and represents the molecular weight for propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC
MW_C equals "12.0110" and represents the molecular weight for carbon
#C_C equals "1" as the single carbon atom was the "basis" for which Method 25A VOC test results were determined as illustrated in Step One of this spreadsheet
#C_{C3H8} equals "3" as three carbon atoms are present within propane; the compound that is the "basis" for expressing mass of VOC per WPP1 VOC

Note: The following portion from the equation immediately above, (1/RF_{C3H8}) X [(MW_{C3H8}) / (MW_C)] X [(#C_C) / (#C_{C3H8})], equals 1.2238 and can be referred to as the "propane mass conversion factor."


Step Nine: Calculate WPP1 VOC by Adding Speciated HAP and Non-HAP Compounds to Ponderosa Pine VOC Emission Factors "as Propane"

WPP1 VOC = Method 25A VOC as propane without speciated compounds + Σ speciated compounds expressed as the entire mass of compound

FROM STEP EIGHT		FROM STEP THREE					FROM STEP SIX		WPP1 VOC (lb/mbf)
Maximum Dry Bulb Temperature (°F)	Method 25A VOC as Propane without Speciated Compounds (lb/mbf)	Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)	Ethanol (lb/mbf)	Acetic Acid (lb/mbf)	
170	1.1942	0.0431	0.0021	0.0340	0.0010	0.0026	0.826	0.162	2.2650
170	1.7732	0.0431	0.0021						2.8440
170	1.9323	0.0431	0.0021						3.0031
176	0.8857	0.0513	0.0026						1.9652
176	1.1401	0.0513	0.0026						2.2195
176	0.9976	0.0513	0.0026						2.0771
176	0.8959	0.0513	0.0026						1.9753
180	1.0769	0.0568	0.0029						2.1621
180	1.3210	0.0568	0.0029	0.1322					2.4063
235	2.5934	0.1322	0.0069						3.7581

Step Ten: Generate Ponderosa Pine Best-Fit Linear Equation with Dependent Variable Maximum Drying Temperature to Model WPP1 VOC Emissions

WPP1 VOC (lb/mbf): 0.02083x - 1.30029 ; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumber

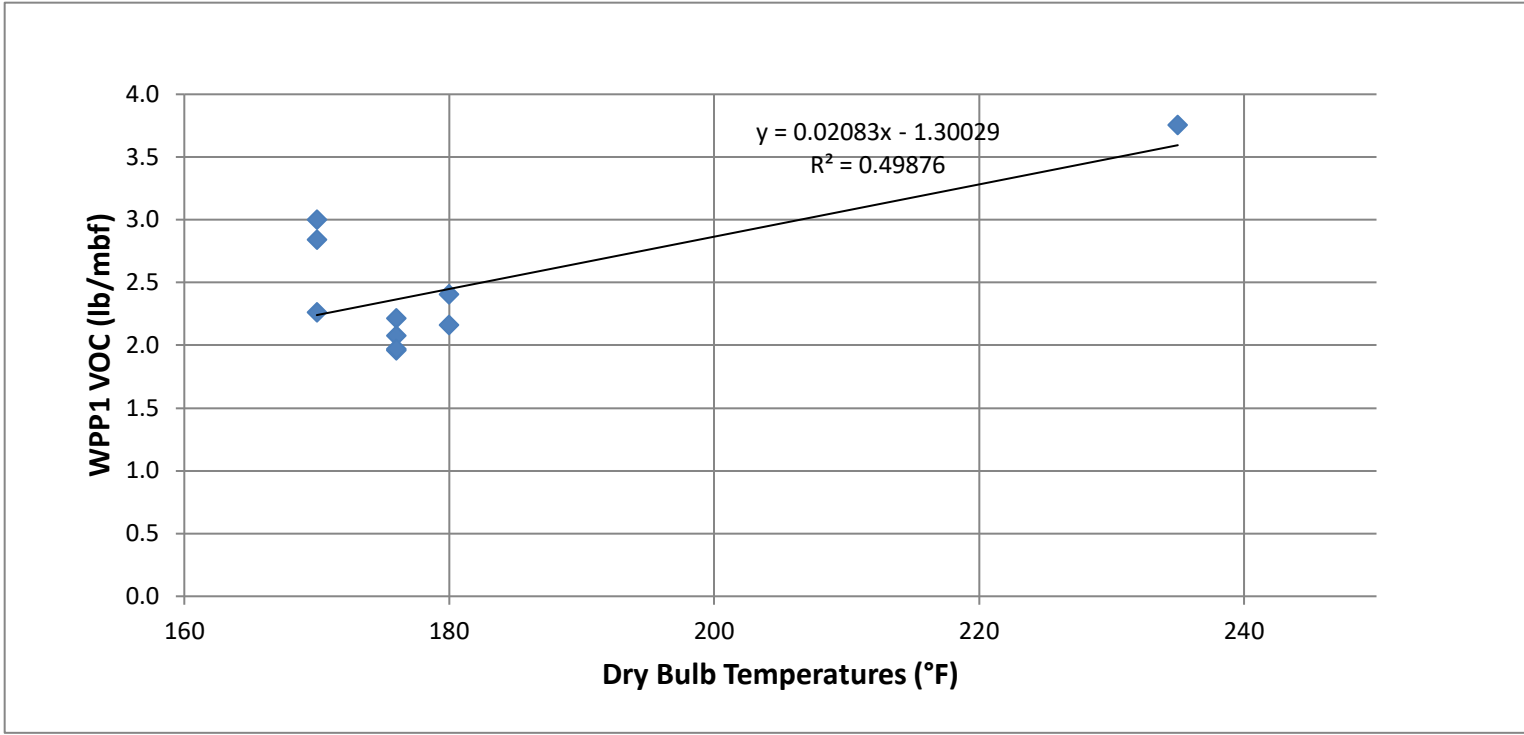

Hazardous Air Pollutant Emission Factors for Drying Western White Pine Lumber

This sheet presents the HAP EF for drying western white pine lumber. EPA Region 10 is not aware of any HAP emission testing of western white pine. When actual test data is not available, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted.

Given the limited western white pine test data, ponderosa pine test data has been substituted. Western white pine is similar to ponderosa pine and lodgepole pine in that all three species are resinous softwood species in the scientific classification genus Pinus. EPA Region 10 is aware of three Lodgepole Pine test runs for methanol and formaldehyde and none for acetaldehyde, propionaldehyde and acrolein. Five ponderosa pine test runs were conducted for methanol and formaldehyde and three for acetaldehyde, propionaldehyde and acrolein. While the lodgepole pine runs were conducted at about the same maximum drying temperature, the ponderosa pine runs were distributed across a wide maximum drying temperature range. Based upon the available test data, ponderosa pine is higher-emitting than lodgepole pine for methanol and formaldehyde. See the ponderosa pine and lodgepole pine HAP sheets for lab-scale test data and calculations.

Western White Pine (Ponderosa Pine Substitution) HAP Emission Factors

Methanol (lb/mbf)	Formaldehyde (lb/mbf)	Acetaldehyde (lb/mbf)	Propionaldehyde (lb/mbf)	Acrolein (lb/mbf)
0.00137x - 0.18979	0.000074x - 0.010457	0.0340	0.0010	0.0026

Volatile Organic Compound Emission Factors for Drying Western White Pine Lumber

This sheet presents the VOC EF for drying western white pine lumber. EPA Region 10 is aware of one test being conducted while drying western white pine lumber, and it was conducted at 170°F. Because VOC emissions increase with maximum drying temperature, employing an EF based upon testing at 170°F would underreport emissions when drying at maximum drying temperatures greater than 170°F. A temperature of 170°F is not a particularly high drying temperature. When little or no actual test data is available, data for a similar species is substituted as noted. When there are more than one similar species, the highest of the EF for the similar species is substituted.

Given the limited western white pine test data, ponderosa pine test data has been substituted. Western white pine is similar to ponderosa pine and lodgepole pine in that all three species are resinous softwood species in the scientific classification genus Pinus. EPA Region 10 is aware of three lodgepole pine test runs and eight ponderosa pine test runs. While the lodgepole pine runs were conducted at about the same maximum drying temperature, the ponderosa pine runs were distributed across a wide maximum drying temperature range. Based upon the available test data, ponderosa pine is higher-emitting than lodgepole pine. See the ponderosa pine and lodgepole pine HAP and VOC sheets for lab-scale test data and calculations.

Western White Pine (Ponderosa Pine Substitution) VOC Emission Factor

WPP1 VOC (lb/mbf): 0.02083x - 1.30029 ; where dependent variable "x" equal to the maximum drying temperature of heated air entering the lumt

Index to References Appearing in EPA Region 10 HAP and VOC Emission Factors for Lumber Drying, June 2018

Reference No. 1

(Undated) J.U.M. Flame Ionization Detector Response Factor Technical Information presented at <http://www.jum-aerosol.com/images/E-Fakt-02.pdf>

Notes

Methanol response factor (RF) of 0.72 equals average of three response factors 0.69, 0.68 and 0.79 for J.U.M. models 3-200 and VE-7. These two models were exclusively employed to determine Method 25A VOC in the testing EPA Region 10 is relying upon to support VOC emission factor derivation.

An alternative RF of 0.65 from Appendix 3 to EPA's Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 at <http://www.epa.gov/ttn/emc/prelim/otm26.pdf> could have been employed instead.

Employing RF of 0.72 (as opposed to 0.65) generates lower VOC emission factors (EF). A higher RF means that the EPA Method 25A flame ionization detector (FID) measures more of the compound. With the methanol EF having already been determined through speciated sampling and analysis, assuming the FID measures a greater portion of the methanol leaves less of the Method 25A measurement to be accounted for as unspciated VOC.

Reference No. 2

National Council of the Paper Industry for Air and Stream Improvement, Inc. Technical Bulletin No. 718. July 1, 1996. A Small-Scale Kiln Study on Method 25A Measurements of Volatile Organic Compound Emissions from Lumber Drying.

Notes

To convert Method 25A VOC from "lb C/ODT" to "lb C/mbf," the following calculations were performed:

White Fir – Runs 15 and 16.

$$(0.85 \text{ lb/ODT}) \times (0.57 \text{ lb/mbf}) / (0.77 \text{ lb/ODT}) = 0.63 \text{ lb/mbf}$$

$$(0.68 \text{ lb/ODT}) \times (0.57 \text{ lb/mbf}) / (0.77 \text{ lb/ODT}) = 0.50 \text{ lb/mbf}$$

See pages 14 and 15 of the reference document.

Western Red Cedar – Runs 10 and 11.

$$(0.12 \text{ lb/ODT}) \times (0.12 \text{ lb/mbf}) / (0.15 \text{ lb/ODT}) = 0.096 \text{ lb/mbf}$$

$$(0.17 \text{ lb/ODT}) \times (0.12 \text{ lb/mbf}) / (0.15 \text{ lb/ODT}) = 0.136 \text{ lb/mbf}$$

See pages 14 and 15 of the reference document.

Douglas fir – Runs 1 and 3.

$$(1.00 \text{ lb/ODT}) \times (0.81 \text{ lb/mbf}) / (0.86 \text{ lb/ODT}) = 0.942$$

$$(0.71 \text{ lb/ODT}) \times (0.81 \text{ lb/mbf}) / (0.86 \text{ lb/ODT}) = 0.669$$

See pages 12 and 15 of the reference document.

Ponderosa Pine – Runs 5 and 6.

$$(1.92 \text{ lb/ODT}) \times (1.86 \text{ lb/mbf}) / (1.99 \text{ lb/ODT}) = 1.795 \text{ lb/mbf}$$

$$(2.06 \text{ lb/ODT}) \times (1.86 \text{ lb/mbf}) / (1.99 \text{ lb/ODT}) = 1.925 \text{ lb/mbf}$$

See pages 14 and 15 of the reference document.

The moisture content of wood was originally reported on a wet basis. It has been corrected to be on a dry basis using the following equation:
(moisture content on dry basis) = (moisture content on wet basis) / [1 – (moisture content on wet basis)]

Reference No. 3

Small-scale Kiln Study Utilizing Ponderosa Pine, Lodgepole Pine, White Fir, and Douglas-fir. Report by Michael R. Milota to Intermountain Forest Association. September 29, 2000.

Reference No. 4

Milota, Michael. VOC and HAP Emissions from Western Species. Western Dry Kiln Association: May 2001, p. 62-68.

Reference No. 5

Milota, M.R. 2003. HAP and VOC Emissions from White Fir Lumber Dried at High and Conventional Temperatures. Forest Prod. J. 53(3):60-64.

Reference No. 6

VOC and HAP Emissions from the High Temperature Drying of Hemlock Lumber. Report by Michael R. Milota to Hampton Affiliates. June 21, 2004.

Reference No. 7

Fritz, Brad. 2004. Pilot- and Full-Scale Measurements of VOC Emissions from Lumber Drying of Inland Northwest Species. Forest Prod. J. 54(7/8):50-56.

Notes

To convert acetaldehyde from "µg/min-bf" to "lb/mbf," the following calculations were performed:

White fir.

$0.0550 \text{ lb/mbf} = (7.7 \text{ µg/min-bf}) \times (60 \text{ min/hr}) \times (54 \text{ hr}) \times (\text{kg}/1 \times 10^9 \text{g}) \times (2.205 \text{ lb/kg}) \times (1,000 \text{ bf/mbf})$.

See page 54 of the reference document.

Douglas fir.

$0.030 \text{ lb/mbf} = (4.9 \text{ µg/min-bf}) \times (60 \text{ min/hr}) \times (46 \text{ hr}) \times (\text{kg}/1 \times 10^9 \text{g}) \times (2.205 \text{ lb/kg}) \times (1,000 \text{ bf/mbf})$.

$0.022 \text{ lb/mbf} = (3.6 \text{ µg/min-bf}) \times (60 \text{ min/hr}) \times (46 \text{ hr}) \times (\text{kg}/1 \times 10^9 \text{g}) \times (2.205 \text{ lb/kg}) \times (1,000 \text{ bf/mbf})$.

See page 53 of the reference document.

Reference No. 8

VOC and Methanol Emissions from the Drying of Hemlock Lumber. Report by Michael R. Milota to Hampton Affiliates. August 24, 2004.

Reference No. 9

VOC, Methanol, and Formaldehyde Emissions from the Drying of Hemlock Lumber. Report by Michael R. Milota to Hampton Affiliates. October 15, 2004.

Reference No. 10

VOC Emissions from the Drying of Douglas-fir Lumber. Report by Michael R. Milota to Columbia Vista Corporation. June 14, 2005.

Reference No. 11

Milota, M.R. and P. Mosher. 2006. Emissions from Western Hemlock Lumber During Drying. Forest Prod. J. 56(5):66-70.

Reference No. 12

Milota, M.R. 2006. Hazardous Air Pollutant Emissions from Lumber Drying. Forest Prod. J. 56(7/8):79-84.

Reference No. 13

VOC, Methanol, and Formaldehyde Emissions from the Drying of Hemlock, ESLP, and Douglas Fir Lumber. Report by Michael R. Milota to Hampton Affiliates. March 23, 2007.

Reference No. 14

Oregon Department of Environmental Quality memorandum May 8, 2007 entitled, "Title III Implications of Drying Kiln Source Test Results."

Notes

The reference document presents a compilation of EF.

Reference No. 15

HAP Emissions from the Drying of Hemlock and Douglas-fir Lumber by NCASI 98.01 and 105. Report by Michael R. Milota to Hampton Affiliates. May 22, 2007 report.

Reference No. 16

EPA Interim VOC Measurement Protocol for the Wood Products Industry - July 2007 presented at <http://www.epa.gov/ttn/emc/prelim/otm26.pdf>

Notes

VOC determined through use of this document is referred to as WPP1 VOC. The document is alternatively known as EPA Other Test Method 26 or "OTM26."

Default formaldehyde RF of 0 and propane (an alkane) RF of 1 appear in Appendix 3 – Procedure for Response Factor Determination for the Interim VOC Measurement Protocol for the Wood Products Industry.

Reference No. 17

HAP Emissions by NCASI 98.01 and 105 from Drying of Ponderosa Pine and White Wood Lumber. Report by Michael R. Milota to Hampton Affiliates. July 25, 2007.

Reference No. 18

Milota, M.R. and P. Mosher. 2008. Emission of Hazardous Air Pollutants from Lumber Drying. Forest Prod. J. 58(7/8):50-55.

Reference No. 19

VOC Emissions From the Drying of Douglas-fir Lumber. Report by Michael R. Milota to Columbia Vista Corp. November 12, 2010.

Reference No. 20

NCASI Technical Bulletin No. 991. September 2011. Characterization, Measurement, and Reporting of Volatile Organic Compounds Emitted from Southern Pine Wood Products Sources.

Notes

Acetaldehyde and propionaldehyde RF appear in Table C-1 of Appendix C. The values are estimates based upon dividing the compound's effective carbon numbers (ECN) by the number of carbon atoms in the compound. See Attachment 2 to Appendix C.

Acrolein RF is also an estimate based upon dividing the compound's ECN by the number of carbon atoms in the compound. In this case, the RF estimate does not appear in Table C-1 of Appendix C. The value is calculated as described above pursuant to Attachment 2 to Appendix C.

$RF = (ECN) / (\text{number of carbon atoms in compound})$

where ECN = 2 given the aliphatic carbon contribution of CH_2CHCHO (see Table 2.1 to Appendix C) and the number of carbon atoms in acrolein = 3.
RF = 2/3 or 0.66

Reference No. 21

Email of 03/26/12 email from Oregon State University's Michael Milota to EPA Region 10's Dan Meyer.



STIMSON LUMBER COMPANY
Environmental Affairs
520 SW Yamhill, Suite 700
Portland, Oregon 97204-1330
(503) 306-4655

18 October 2019

Mr. Doug Hardesty
U.S. EPA
1435 N Orchard
Boise, Idaho 83706

RE: Proposed Kiln Emissions Factors for Stimson, Plummer Title V Renewal

Dear Mr. Hardesty:

Stimson wishes to thank EPA for the time and effort that has gone into the technical analysis needed for renewal of the Plummer facility's Title V permit. We are appreciative of the opportunity to review the proposed emissions factors for the permit analysis.

We have looked over the proposed kiln emission factors, as well as the work done by the Washington Southwest Clean Air Agency (SWCAA) and have the following comments. In general, we agree that the approach is an improvement over previous efforts and, in particular, the use of a regression equation for the formaldehyde and methanol emissions is superior to having a single cut point.

The issue of concern is the reliance upon small lab-scale kilns to derive the emissions factors. For a number of reasons, these kilns are not representative of operations at full-scale production kilns. Based upon work that we present below, this seems to be particularly true of the OSU kiln used by Dr. Milota, which serves as the primary source of HAP emission factors for western species. The unfortunate fact is that there is very little data comparing the emissions from a small lab kiln to those of a production kiln - in fact, we are only aware of NCASI Technical Bulletin 845 from 2002. However, based upon that study, we find the following differential in measured emissions:

From NCASI Technical Bulletin 845:

Pollutant	FSK	OSU	OSU:FSK
VOC	3.5	4.3	1.23
Formaldehyde	0.016	0.021	1.31
Methanol	0.21	0.23	1.10
Acetaldehyde	0.039	0.065	1.67
Acrolein	0.006	0.009	1.50
Propionaldehyde	0.001	0.003	3.00

FSK = Full Scale Kiln

OSU = Oregon State University lab scale kiln

We note that the OSU kiln yields a consistently higher bias in the emissions - by an average of 64%. Neither the Mississippi State nor the Horizon Engineering kilns demonstrated this consistent high bias so we do not believe it is simply a matter of the difficulty in fully characterizing the production kiln. In the technical bulletin NCASI staff come to the conclusion that "...VOC emissions measured at a small-scale kiln can reasonably approximate those from a full-scale kiln..." However, this conclusion is based upon

the full sample set from multiple small scale kilns. Indeed, if we include the Phase II MSU kiln results in the analysis the average results are much closer. Unfortunately, virtually all of the western species data is from the OSU kiln, so there is a high bias. What significant differences in the operation of the OSU kiln can account for this consistently higher bias?

Unidirectional flow: Unlike full scale production kilns, the OSU kiln features unidirectional airflow. Production kilns have reversible fans that allow bidirectional air flow. The OSU design results in uneven drying that would be unacceptable in a commercial environment.

Hotter wood: The smaller charge size in the OSU kiln results in less volume of wood to absorb the thermal energy of the surrounding air. This is further compounded by the shorter linear distance the air has to travel over in the lab kiln. The result is anticipated to be hotter wood than equivalent kiln temperatures would yield in a full scale production kiln. Thus, we would expect the dry bulb temperature to be less indicative of the actual wood temperature in a full scale kiln than in the lab kilns. This is borne out by the faster drying time in the OSU kiln.

Increased airflow: Table 8.3 of NCASI Technical Bulletin 845 illustrates the dramatically enhanced airflow through the lab kiln relative to a full scale production kiln:

Table 8.3. Phase II Total Volume of Kiln Exhaust Gas per MBF

Test Charge	FSK	MSU	OSU
	wscf x 10 ³ per MBF		
	Direct Fired Drying Schedule		
DF1	18.80	8.36	9.19
DF2	18.10	8.72	9.04
DF3	17.30	8.74	9.11
DF4	18.10	7.67	6.61
DF5	17.50	7.73	9.05
DF6	17.00	8.90	9.85
Average	17.80	8.35	8.97
	Steam-Heated Drying Schedule		
INDF1	7.69	8.62	8.99
INDF2	3.98	9.96	7.52
INDF3	3.75	9.95	8.50
INDF5	3.44	10.90	7.25
INDF6	3.38	6.68	7.56
INDF7	3.71	7.29	8.48
Average	3.49	8.90	8.02


Note that for steam heated kilns the airflow of the OSU kiln averages over 200% greater on a per unit of lumber basis. This is likely to increase emissions by enhancing pollutant removal.

Of course, the best case scenario would be to have comprehensive production kiln test results, but this would be very expensive and difficult to acquire. And, in any event, it is not currently available. Thus, the straight-forward approach to adapting the lab kiln results is to simply adjust the lab emissions by a correction factor. Absent additional data, the NCASI Technical Bulletin is what we have available to do this. Applying such a correction factor yields the factors attached.

Thus, Stimson proposes revised emission factors for the facility. We note, however, that this accepts that temperature is a valid parameter for correlation with emissions. At this time, Stimson has not looked closely at whether moisture contents might be a useful in this regard. Less data is likely to be available for a moisture approach and it would likely suffer the same issues with scaling of lab kiln results. Further, we have largely accepted EPA's sample selection and analysis due to time constraints. Stimson may look at this in more detail as discussions continue.

We will be providing an analysis of boiler emission factors shortly.

Sincerely,

A handwritten signature in black ink, appearing to read "Steven Petrin", is written over a faint, circular, dotted-line stamp.

STEVEN PETRIN
Environmental Manager

NCASI Technical Bulletin No. 845

Pollutant	Emission Rate (lb/mbf) [*]		# of Runs	Run ID	Location of Data within Technical Bulletin
	Full Scale Kiln	Oregon State University Kiln			
VOC as carbon	3.533333	4.25	6	1 – 3 & 5 – 7	Table 8.2
Formaldehyde	0.0155	0.021	2	1 & 3	Table 9.5 ^{**}
Methanol	0.205	0.225	2	1 & 3	Table 9.6 ^{**}
Acetaldehyde	0.039	0.065	1	3	Appendix BB1
Acrolein	0.006	0.009	1	3	
Propionaldehyde	0.001	0.003	1	3	

* Value reflects arithmetic mean in those instances when more than one run was performed

** Run 3 data also in Appendix BB1