

## Emission Factors for Greenhouse Gas Inventories

Last Modified: February 13, 2024

Blue text indicates an update from the 2023 version of this document.

Typically, greenhouse gas emissions are reported in units of carbon dioxide equivalent (CO<sub>2</sub>e). Gases are converted to CO<sub>2</sub>e by multiplying by their global warming potential (GWP). In most cases, the emission factors listed in this document generally have not been converted to CO<sub>2</sub>e. To do so, multiply the emissions by the corresponding GWP listed in the table below.

Gas	100-Year GWP
CH <sub>4</sub>	28
N <sub>2</sub> O	265

Source: Intergovernmental Panel on Climate Change (IPCC), Fifth Assessment Report (AR5), 2013. See the source note to Table 11 for further explanation.

### Notes:

These GWP values represent a change from the previous version of this document. In alignment with the U.S. Inventory of U.S. GHG Emissions and Sinks 1990-2021 Inventory Report, the recommended GWP values have been updated to Intergovernmental Panel on Climate Change (IPCC), Fifth Assessment Report (AR5) values.

**Table 1 Stationary Combustion**

Fuel Type	Heat Content (HHV) mmBtu per short ton	CO <sub>2</sub> Factor kg CO <sub>2</sub> per mmBtu	CH <sub>4</sub> Factor g CH <sub>4</sub> per mmBtu	N <sub>2</sub> O Factor g N <sub>2</sub> O per mmBtu	CO <sub>2</sub> Factor kg CO <sub>2</sub> per short ton	CH <sub>4</sub> Factor g CH <sub>4</sub> per short ton	N <sub>2</sub> O Factor g N <sub>2</sub> O per short
<b>Coal and Coke</b>							
Anthracite	25.09	103.69	11	1.6	2,602	276	40
Bituminous	24.93	93.28	11	1.6	2,325	274	40
Sub-bituminous	17.25	97.17	11	1.6	1,676	190	28
Lignite	14.21	97.72	11	1.6	1,389	156	23
Mixed (Commercial Sector)	21.39	94.27	11	1.6	2,016	235	34
Mixed (Electric Power Sector)	18.73	95.52	11	1.6	1,885	217	32
Mixed (Industrial Coking)	26.28	93.90	11	1.6	2,488	289	42
Mixed (Industrial Sector)	22.35	94.67	11	1.6	2,116	246	36
Coal Coke	24.80	113.67	11	1.6	2,819	273	40
<b>Other Fuels - Solid</b>							
Municipal Solid Waste	9.95	90.70	32	4.2	902	318	42
Petroleum Coke (Solid)	30.00	102.41	32	4.2	3,072	960	126
Plastics	38.00	75.00	32	4.2	2,850	1,216	160
Tires	28.00	85.97	32	4.2	2,407	896	118
<b>Biomass Fuels - Solid</b>							
Agricultural Byproducts	8.25	118.17	32	4.2	975	264	35
Peat	8.00	111.84	32	4.2	895	256	34
Solid Byproducts	10.39	105.51	32	4.2	1,096	332	44
Wood and Wood Residuals	17.48	93.80	7.2	3.6	1,640	126	63
<b>Natural Gas</b>							
Natural Gas	0.001026	53.06	1.0	0.10	0.05444	0.00103	0.00010
<b>Other Fuels - Gaseous</b>							
Blasit Furnace Gas	0.000092	274.32	0.022	0.10	0.02534	0.000002	0.000009
Coke Oven Gas	0.000599	46.85	0.46	0.10	0.02806	0.000288	0.000060
Fuel Gas	0.001388	59.00	3.0	0.60	0.08189	0.004164	0.000833
Propane Gas	0.002516	61.46	3.0	0.60	0.15463	0.007548	0.001510
<b>Biomass Fuels - Gaseous</b>							
Landfill Gas	0.000485	52.07	3.2	0.63	0.025254	0.001552	0.000306
Other Biomass Gases	0.000655	52.07	3.2	0.63	0.034106	0.002096	0.000413
<b>Petroleum Products</b>							
Asphalt and Road Oil	0.158	75.36	3.0	0.60	11.91	0.47	0.09
Aviation Gasoline	0.120	69.25	3.0	0.60	8.31	0.36	0.07
Butane	0.103	64.77	3.0	0.60	6.67	0.31	0.06
Butylene	0.105	68.72	3.0	0.60	7.22	0.32	0.06
Crude Oil	0.138	74.54	3.0	0.60	10.29	0.41	0.08
Distillate Fuel Oil No. 1	0.139	73.25	3.0	0.60	10.18	0.42	0.08
Distillate Fuel Oil No. 2	0.138	73.96	3.0	0.60	10.21	0.41	0.08
Distillate Fuel Oil No. 4	0.146	75.04	3.0	0.60	10.96	0.44	0.09
Ethane	0.068	59.60	3.0	0.60	4.05	0.20	0.04
Ethylene	0.058	65.96	3.0	0.60	3.83	0.17	0.03
Heavy Gas Oils	0.148	74.92	3.0	0.60	11.09	0.44	0.09
Isobutane	0.099	64.94	3.0	0.60	6.43	0.30	0.06
Isobutylene	0.103	68.86	3.0	0.60	7.09	0.31	0.06
Kerosene	0.135	75.20	3.0	0.60	10.15	0.41	0.08
Kerosene-Type Jet Fuel	0.135	72.22	3.0	0.60	9.75	0.41	0.08
Liquefied Petroleum Gases (LPG)	0.092	61.71	3.0	0.60	5.88	0.28	0.06
Lubricants	0.144	74.27	3.0	0.60	10.69	0.43	0.09
Motor Gasoline	0.125	70.22	3.0	0.60	8.78	0.38	0.08
Naphtha (<401 deg F)	0.125	68.02	3.0	0.60	8.50	0.38	0.08
Natural Gasoline	0.110	66.88	3.0	0.60	7.36	0.33	0.07
Other Oil (>401 deg F)	0.139	76.22	3.0	0.60	10.59	0.42	0.08
Pentanes Plus	0.110	70.02	3.0	0.60	7.70	0.33	0.07
Petrochemical Feedstocks	0.125	71.02	3.0	0.60	8.88	0.38	0.08
Propane	0.091	62.87	3.0	0.60	5.72	0.27	0.05
Propylene	0.091	67.77	3.0	0.60	6.17	0.27	0.05
Residual Fuel Oil No. 5	0.140	72.93	3.0	0.60	10.21	0.42	0.08
Residual Fuel Oil No. 6	0.150	75.10	3.0	0.60	11.27	0.45	0.09
Special Naphtha	0.125	72.34	3.0	0.60	9.04	0.38	0.08
Unfinished Oils	0.139	74.54	3.0	0.60	10.36	0.42	0.08
Used Oil	0.138	74.00	3.0	0.60	10.21	0.41	0.08
<b>Biomass Fuels - Liquid</b>							
Biodiesel (100%)	0.128	73.84	1.1	0.11	9.45	0.14	0.01
Ethanol (100%)	0.084	68.44	1.1	0.11	5.75	0.09	0.01
Rendered Animal Fat	0.125	71.06	1.1	0.11	8.88	0.14	0.01
Vegetable Oil	0.120	81.55	1.1	0.11	9.79	0.13	0.01
<b>Biomass Fuels - Kraft Pulp Liqueur, by Wood Furnish</b>							
North American Softwood		94.4	1.9	0.42			
North American Hardwood		93.7	1.9	0.42			
Bagasse		95.5	1.9	0.42			
Bamboo		93.7	1.9	0.42			
Straw		95.1	1.9	0.42			

### Source:

Federal Register EPA: 40 CFR Part 98; e-CFR, (see link below), Table C-1 and Table C-2 (78 FR 71950, Nov. 29, 2013, as amended at 81 FR 89252, Dec. 9, 2016), Table AA-1 (78 FR 71965, Nov. 29, 2013).  
<https://www.ecfr.gov/current/title-40/chapter-I/subchapter-C/part-98>

### Notes:

Emission factors are per unit of heat content using higher heating values (HHV). If heat content is available from the fuel supplier, it is preferable to use that value. If not, default heat contents are provided. All CO<sub>2</sub> emission factors assume that 100 percent of the carbon content of the fuel is oxidized to CO<sub>2</sub>, as is recommended by the Intergovernmental Panel on Climate Change (IPCC). The CH<sub>4</sub> and N<sub>2</sub>O emission factors provided represent emissions in terms of fuel type and by end-use sector (i.e., residential, commercial, industrial, electricity generation). The factors represented in the table above represent combustion emissions only and do not represent upstream emissions.

**Table 2** Mobile Combustion CO<sub>2</sub>

Fuel Type	kg CO <sub>2</sub> per unit	Unit
Aviation Gasoline	8.31	gallon
Biodiesel (100%)	9.45	gallon
Compressed Natural Gas (CNG)	0.05444	scf
Diesel Fuel	10.21	gallon
Ethanol (100%)	5.75	gallon
Kerosene-Type Jet Fuel	9.75	gallon
Liquefied Natural Gas (LNG)	4.50	gallon
Liquefied Petroleum Gases (LPG)	5.68	gallon
Motor Gasoline	8.78	gallon
Residual Fuel Oil	11.27	gallon

**Source:**

Federal Register EPA: 40 CFR Part 98; e-CFR, (see link below). Table C-1 (78 FR 71950, Nov. 29, 2013, as amended at 81 FR 89252, Dec. 9, 2016)  
<https://www.ecfr.gov/current/title-40/chapter-I/subchapter-C/part-98>

**Notes:**

LNG: The factor was developed based on the CO<sub>2</sub> factor (kg CO<sub>2</sub> per mmBtu) for Natural Gas from Table 1 and the higher heating value (HHV) LNG fuel density factor (btu/gallon) from the GREET1 2023 Model, Argonne National Laboratory published December 21, 2023 (Fuel\_Specs worksheet).

More information on GREET can be found here: [https://greet.anl.gov/greet\\_excel\\_model/models](https://greet.anl.gov/greet_excel_model/models)

The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.

**Table 3** Mobile Combustion CH<sub>4</sub> and N<sub>2</sub>O for On-Road Gasoline Vehicles

Vehicle Type	Model Year	CH <sub>4</sub> Factor (g CH <sub>4</sub> / vehicle-mile)	N <sub>2</sub> O Factor (g N <sub>2</sub> O / vehicle-mile)
Gasoline Passenger Cars	1973-1974	0.1696	0.0197
	1975	0.1423	0.0443
	1976-1977	0.1406	0.0458
	1978-1979	0.1389	0.0473
	1980	0.1326	0.0499
	1981	0.0802	0.0626
	1982	0.0795	0.0627
	1983	0.0782	0.0630
	1984-1993	0.0704	0.0647
	1994	0.0617	0.0603
	1995	0.0531	0.0560
	1996	0.0434	0.0503
	1997	0.0337	0.0446
	1998	0.0240	0.0389
	1999	0.0215	0.0355
	2000	0.0175	0.0304
	2001	0.0105	0.0212
	2002	0.0102	0.0207
	2003	0.0095	0.0181
	2004	0.0078	0.0085
	2005	0.0075	0.0067
	2006	0.0076	0.0075
	2007	0.0072	0.0052
	2008	0.0072	0.0048
	2009	0.0071	0.0046
	2010	0.0071	0.0046
	2011	0.0071	0.0046
	2012	0.0071	0.0046
	2013	0.0071	0.0046
	2014	0.0071	0.0046
	2015	0.0068	0.0042
	2016	0.0065	0.0038
	2017	0.0054	0.0018
	2018	0.0052	0.0016
	2019	0.0051	0.0015
	2020	0.0050	0.0014
	2021	0.0051	0.0014
Gasoline Light-Duty Trucks (Vans, Pickup Trucks, SUVs)	1973-1974	0.1908	0.0218
	1975	0.1634	0.0513
	1976	0.1594	0.0555
	1977-1978	0.1614	0.0534
	1979-1980	0.1594	0.0555
	1981	0.1479	0.0660
	1982	0.1442	0.0681
	1983	0.1368	0.0722
	1984	0.1294	0.0764
	1985	0.1220	0.0806
	1986	0.1146	0.0848
	1987-1993	0.0813	0.1035
	1994	0.0646	0.0982
	1995	0.0517	0.0908
	1996	0.0452	0.0871
	1997	0.0452	0.0871
	1998	0.0412	0.0787
	1999	0.0333	0.0618
	2000	0.0340	0.0631
	2001	0.0221	0.0379
	2002	0.0242	0.0424
	2003	0.0221	0.0373
	2004	0.0115	0.0088
	2005	0.0105	0.0064
	2006	0.0108	0.0080
	2007	0.0103	0.0061
	2008	0.0095	0.0036
	2009	0.0095	0.0036
	2010	0.0095	0.0035
	2011	0.0096	0.0034
	2012	0.0096	0.0033
	2013	0.0095	0.0035
	2014	0.0095	0.0033
	2015	0.0094	0.0031
	2016	0.0091	0.0029
	2017	0.0084	0.0018
	2018	0.0081	0.0015
	2019	0.0080	0.0013
	2020	0.0079	0.0012
	2021	0.0079	0.0012
Gasoline Heavy-Duty Vehicles	≤1980	0.4604	0.0497
	1981-1984	0.4492	0.0538
	1985-1986	0.4090	0.0515
	1987	0.3675	0.0849
	1988-1989	0.3492	0.0933
	1990-1995	0.3246	0.1142
	1996	0.1278	0.1680
	1997	0.0924	0.1728
	1998	0.0655	0.1750
	1999	0.0648	0.1724
	2000	0.0630	0.1660
	2001	0.0577	0.1468
	2002	0.0634	0.1673
	2003	0.0602	0.1553
	2004	0.0298	0.0164
	2005	0.0297	0.0083
	2006	0.0299	0.0241
	2007	0.0322	0.0015
	2008	0.0340	0.0015
	2009	0.0339	0.0015
	2010	0.0320	0.0015
	2011	0.0304	0.0015
	2012	0.0313	0.0015
	2013	0.0313	0.0015
	2014	0.0315	0.0015
	2015	0.0332	0.0021
	2016	0.0321	0.0061
	2017	0.0329	0.0084
	2018	0.0326	0.0082
	2019	0.0330	0.0091
	2020	0.0332	0.0100
	2021	0.0332	0.0100
Gasoline Motorcycles	1960-1995	0.0070	0.0083
	1996-2005	0	0
	2006-2020	0.0070	0.0083

**Source:** EPA (2023) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2021 (Annexes). All values are calculated from Tables A-81 through A-85.

**Notes:**

The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.

**Table 4 Mobile Combustion CH<sub>4</sub> and N<sub>2</sub>O for On-Road Diesel and Alternative Fuel Vehicles**

Vehicle Type	Fuel Type	Model Year	CH <sub>4</sub> Factor (g CH <sub>4</sub> / vehicle-mile)	N <sub>2</sub> O Factor (g N <sub>2</sub> O / vehicle-mile)
Passenger Cars	Diesel	1960-1982	0.0006	0.0012
		1983-2006	0.0005	0.0010
		2007-2021	0.0002	0.0192
Light-Duty Trucks	Diesel	1960-1982	0.0011	0.0017
		1983-2006	0.0009	0.0014
		2007-2021	0.0290	0.0214
Medium- and Heavy-Duty Vehicles	Diesel	1960-2006	0.0051	0.0048
		2007-2021	0.0095	0.0431
Light-Duty Cars	Methanol		0.0130	0.0040
	Ethanol		0.0130	0.0040
	CNG		0.1330	0.0040
	LPG		0.0130	0.0040
	Biodiesel		0.0360	0.0010
Light-Duty Trucks	Ethanol		0.0140	0.0050
	CNG		0.1440	0.0050
	LPG		0.0140	0.0050
	LNG		0.1440	0.0050
	Biodiesel		0.1270	0.0010
Medium-Duty Trucks	CNG		1.8070	0.0340
	LPG		0.1810	0.0340
	LNG		1.8070	0.0340
	Biodiesel		0.0400	0.0050
	Methanol		0.0730	0.0270
Heavy-Duty Trucks	Ethanol		0.0730	0.0270
	CNG		0.9210	0.0170
	LPG		0.0920	0.0170
	LNG		0.9210	0.0170
	Biodiesel		0.0140	0.0020
Buses	Methanol		0.1930	0.0290
	Ethanol		0.1930	0.0290
	CNG		2.7530	0.0170
	LPG		0.2750	0.0170
	LNG		2.7530	0.0170
	Biodiesel		0.0160	0.0030

Source: EPA (2023) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2021 (Annexes). All values are calculated from Tables A-84 through A-85.

<https://www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks>

**Notes:**

The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.

**Table 5 Mobile Combustion CH<sub>4</sub> and N<sub>2</sub>O for Non-Road Vehicles**

Vehicle Type	Fuel Type	CH <sub>4</sub> Factor (g CH <sub>4</sub> / gallon)	N <sub>2</sub> O Factor (g N <sub>2</sub> O / gallon)
Ships and Boats	Residual Fuel Oil	1.10	0.31
	Gasoline (2 stroke)	4.64	0.08
	Gasoline (4 stroke)	2.26	0.01
	Diesel	6.41	0.17
Locomotives	Diesel	0.80	0.26
	Jet Fuel	0	0.30
Aircraft	Aviation Gasoline	7.06	0.11
	Gasoline (2 stroke)	6.92	0.47
Agricultural Equipment <sup>a</sup>	Gasoline (4 stroke)	1.94	1.21
	Gasoline Off-Road Trucks	1.94	1.20
	Diesel Equipment	1.27	1.07
	Diesel Off-Road Trucks	0.91	0.56
	LPG	0.33	0.95
Construction/Mining Equipment <sup>b</sup>	Gasoline (2 stroke)	7.98	0.12
	Gasoline (4 stroke)	2.85	1.47
	Gasoline Off-Road Trucks	2.85	1.47
	Diesel Equipment	1.01	0.94
	Diesel Off-Road Trucks	0.91	0.56
Lawn and Garden Equipment	LPG	0.59	0.50
	Gasoline (2 stroke)	7.29	0.31
	Gasoline (4 stroke)	3.00	1.49
Airport Equipment	Diesel	0.66	0.49
	LPG	0.41	0.63
	Gasoline	1.02	1.07
Industrial/Commercial Equipment	Diesel	1.89	1.16
	LPG	0.35	0.89
	Gasoline (2 stroke)	7.13	0.50
	Gasoline (4 stroke)	2.74	1.54
Logging Equipment	Diesel	0.42	0.60
	LPG	0.44	0.64
	Gasoline (2 stroke)	9.68	0
Railroad Equipment	Gasoline (4 stroke)	3.24	2.06
	Diesel	0.49	1.27
	Gasoline	3.24	1.81
Recreational Equipment	Diesel	0.40	0.95
	LPG	2.00	0.01
	Gasoline (2 stroke)	9.80	0.11
	Gasoline (4 stroke)	2.72	1.48
	Diesel	0.73	0.66
	LPG	0.43	0.61

Source: EPA (2023) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2021 (Annexes). All values are calculated from Tables A-88 and A-92.

<https://www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks>

**Notes:**

The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.

<sup>a</sup> Includes equipment, such as tractors and combines, as well as fuel consumption from trucks that are used off-road in agriculture.

<sup>b</sup> Includes equipment, such as cranes, dumpers, and excavators, as well as fuel consumption from trucks that are used off-road in construction.

**Table 6** Electricity

eGRID Subregion Acronym	eGRID Subregion Name	Total Output Emission Factors			Non-Baseload Emission Factors		
		CO <sub>2</sub> Factor (lb CO <sub>2</sub> / MWh)	CH <sub>4</sub> Factor (lb CH <sub>4</sub> / MWh)	N <sub>2</sub> O Factor (lb N <sub>2</sub> O / MWh)	CO <sub>2</sub> Factor (lb CO <sub>2</sub> / MWh)	CH <sub>4</sub> Factor (lb CH <sub>4</sub> / MWh)	N <sub>2</sub> O Factor (lb N <sub>2</sub> O / MWh)
AKGD	ASCC Alaska Grid	1,052.1	0.088	0.012	1,224.5	0.123	0.017
AKMS	ASCC Miscellaneous	495.8	0.023	0.004	1,587.9	0.069	0.012
AZNM	WECC Southwest	776.0	0.051	0.007	1,205.2	0.065	0.009
CAMX	WECC California	497.4	0.030	0.004	1,055.0	0.049	0.006
ERCT	ERCOT All	771.1	0.049	0.007	1,194.9	0.067	0.009
FRCC	FRCC All	813.8	0.048	0.006	1,044.4	0.056	0.007
HIMS	HICC Miscellaneous	1,155.5	0.124	0.019	1,619.2	0.157	0.025
HIOA	HICC Oahu	1,575.4	0.163	0.025	1,810.3	0.177	0.028
MROE	MRO East	1,479.6	0.133	0.019	1,672.9	0.147	0.021
MROW	MRO West	936.5	0.102	0.015	1,794.7	0.183	0.026
NEWE	NPCC New England	536.4	0.063	0.008	823.3	0.073	0.010
NWPP	WECC Northwest	602.1	0.056	0.008	1,515.7	0.134	0.019
NYCW	NPCC NYC/Westchester	885.2	0.023	0.003	971.8	0.021	0.002
NYLI	NPCC Long Island	1,200.7	0.135	0.018	1,316.7	0.039	0.005
NYUP	NPCC Upstate NY	274.6	0.015	0.002	920.1	0.043	0.005
PRMS	Puerto Rico Miscellaneous	1,593.5	0.087	0.014	1,670.9	0.074	0.013
RFCE	RFC East	657.4	0.045	0.006	1,278.7	0.097	0.013
RFCM	RFC Michigan	1,216.4	0.116	0.016	1,597.3	0.149	0.021
RFCW	RFC West	1,000.1	0.087	0.012	1,843.6	0.178	0.026
RMPA	WECC Rockies	1,124.9	0.101	0.014	1,676.4	0.129	0.018
SPNO	SPP North	952.6	0.100	0.014	1,943.0	0.198	0.029
SPSO	SPP South	970.4	0.072	0.010	1,528.2	0.105	0.015
SRMV	SERC Mississippi Valley	801.0	0.040	0.006	1,220.7	0.073	0.010
SRMW	SERC Midwest	1,369.9	0.151	0.022	1,808.6	0.186	0.027
SRSO	SERC South	893.3	0.064	0.009	1,354.8	0.092	0.013
SRTV	SERC Tennessee Valley	933.1	0.082	0.012	1,671.0	0.152	0.022
SRVC	SERC Virginia/Carolina	623.0	0.047	0.007	1,308.8	0.099	0.014
US Average	US Average	823.1	0.066	0.009	1,405.3	0.107	0.015

Source: EPA eGRID2022, January 2024 (Summary Tables - Table 1. Subregion Output Emission Rates)  
[https://www.epa.gov/system/files/documents/2024-01/eGRID2022\\_summary\\_tables.xlsx](https://www.epa.gov/system/files/documents/2024-01/eGRID2022_summary_tables.xlsx)


**Notes:**

Total output emission factors can be used as default factors for estimating GHG emissions from electricity use when developing a carbon footprint or emissions inventory. Annual non-baseload output emission factors should not be used when developing a carbon footprint or emissions inventory, but can be used to estimate GHG emissions reductions on the grid from changes in electricity use.

For technical information, reference the EPA's eGRID Technical Guide

[https://www.epa.gov/system/files/documents/2024-01/eGRID2022\\_technical\\_guide.pdf](https://www.epa.gov/system/files/documents/2024-01/eGRID2022_technical_guide.pdf)

The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.

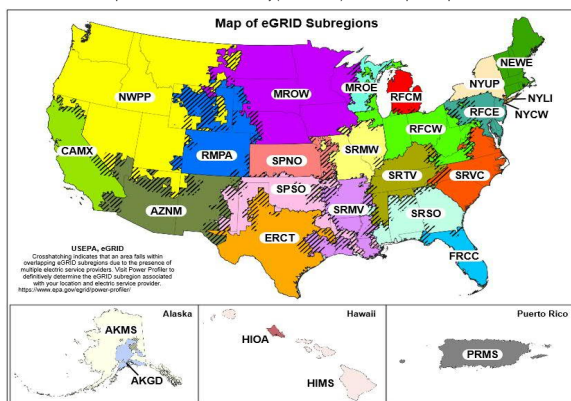

**Table 7 Steam and Heat**

	CO <sub>2</sub> Factor (kg CO <sub>2</sub> / mmBtu)	CH <sub>4</sub> Factor (g CH <sub>4</sub> / mmBtu)	N <sub>2</sub> O Factor (g N <sub>2</sub> O / mmBtu)
Steam and Heat	66.33	1.250	0.125

**Notes:**  
Emission factors are per mmBtu of steam or heat purchased. These factors assume natural gas fuel is used to generate steam or heat at 80 percent thermal efficiency.  
The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.

**Scope 3 Emission Factors**

Scope 3 emission factors provided below are aligned with the Greenhouse Gas Protocol Technical Guidance for Calculating Scope 3 Emissions, version 1.0 (Scope 3 Calculation Guidance). Where applicable, the specific calculation method is referenced. Refer to the Scope 3 Calculation Guidance for more information (<http://www.ghgprotocol.org/scope-3-technical-calculation-guidance>)

**Table 8 Scope 3 Category 4: Upstream Transportation and Distribution and Category 9: Downstream Transportation and Distribution**

These factors are intended for use in the distance-based method defined in the Scope 3 Calculation Guidance. If fuel data are available, then the fuel-based method should be used, with factors from Tables 2 through 5.

Vehicle Type	CO <sub>2</sub> Factor (kg CO <sub>2</sub> / unit)	CH <sub>4</sub> Factor (g CH <sub>4</sub> / unit)	N <sub>2</sub> O Factor (g N <sub>2</sub> O / unit)	Units
Medium- and Heavy-Duty Truck	1.247	0.011	0.035	vehicle-mile
Passenger Car <sup>a</sup>	0.175	0.005	0.003	vehicle-mile
Light-Duty Truck <sup>b</sup>	0.955	0.026	0.023	vehicle-mile
Medium- and Heavy-Duty Truck <sup>c</sup>	0.168	0.0015	0.0047	ton-mile
Rail	0.022	0.0017	0.0005	ton-mile
Waterborne Craft	0.082	0.0326	0.0021	ton-mile
Aircraft	0.905	0	0.0279	ton-mile

**Source:**  
CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions data for road vehicles are from Table 2-13 of the EPA (April 2023) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2021 data.  
Vehicle-miles and passenger-miles data for road vehicles are from Table VM-1 of the Federal Highway Administration Highway Statistics (January 2024): 2021 data.  
CO<sub>2</sub>e emissions data for non-road vehicles are based on Table A-107 of the EPA (April 2023) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2021 data, which are distributed into CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions based on fuel/vehicle emission factors.  
Freight ton-mile data are from Table 1-50 of the Bureau of Transportation Statistics, National Transportation Statistics (June 2022): 2020 data.

**Notes:**  
Vehicle-mile factors are appropriate to use when the entire vehicle is dedicated to transporting the reporting company's product. Ton-mile factors are appropriate when the vehicle is shared with products from other companies.  
The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.  
Changes from prior year values partially due to a methodology change in the allocation of emissions to vehicle type.

<sup>a</sup> Passenger car: includes passenger cars, minivans, SUVs, and small pickup trucks (vehicles with wheelbase less than 121 inches).  
<sup>b</sup> Light-duty truck: includes full-size pickup trucks, full-size vans, and extended-length SUVs (vehicles with wheelbase greater than 121 inches).  
<sup>c</sup> Medium- and Heavy-Duty Truck: includes Combination Trucks and single frame trucks that have 2-Axes and at least 6 tires or a gross vehicle weight rating exceeding 10,000 lbs.

**Table 9 Scope 3 Category 5: Waste Generated in Operations and Category 12: End-of-Life Treatment of Sold Products**

These factors are intended for use in the waste-type-specific method or the average-data method defined in the Scope 3 Calculation Guidance for category 5 and category 12. Choose the appropriate material and disposal method from the table below. For the average-data method, use one of the mixed material types, such as mixed MSW.

Material	Metric Tons CO <sub>2</sub> e / Short Ton Material					
	Recycled <sup>a</sup>	Landfilled <sup>b</sup>	Combusted <sup>c</sup>	Composted <sup>d</sup>	Anaerobically Digested (Dry Digestate with Curing)	Anaerobically Digested (Wet Digestate with Curing)
Aluminum Cans	0.06	0.02	0.01	NA	NA	NA
Aluminum Ingot	0.04	0.02	0.01	NA	NA	NA
Steel Cans	0.32	0.02	0.01	NA	NA	NA
Copper Wire	0.18	0.02	0.01	NA	NA	NA
Glass	0.05	0.02	0.01	NA	NA	NA
HDPE	0.21	0.02	2.80	NA	NA	NA
LDPE	NA	0.02	2.80	NA	NA	NA
PET	0.23	0.02	2.05	NA	NA	NA
LLDPE	NA	0.02	2.80	NA	NA	NA
PP	0.20	0.02	2.80	NA	NA	NA
PS	NA	0.02	3.02	NA	NA	NA
PVC	NA	0.02	1.26	NA	NA	NA
PLA	NA	0.02	0.01	0.13	NA	NA
Corrugated Containers	0.11	1.00	0.05	NA	NA	NA
Magazines/Third-class mail	0.02	0.46	0.05	NA	NA	NA
Newspaper	0.02	0.39	0.05	NA	NA	NA
Office Paper	0.02	1.41	0.05	NA	NA	NA
Phonebooks	0.04	0.39	0.05	NA	NA	NA
Textbooks	0.04	1.41	0.05	NA	NA	NA
Dimensional Lumber	NA	0.17	0.05	NA	NA	NA
Medium-density Fiberboard	NA	0.07	0.05	NA	NA	NA
Food Waste (non-meat)	NA	0.67	0.05	0.11	0.14	0.11
Food Waste (meat only)	NA	0.69	0.05	0.11	0.14	0.11
Beef	NA	0.64	0.05	0.11	0.14	0.11
Poultry	NA	0.73	0.05	0.11	0.14	0.11
Grains	NA	2.06	0.05	0.11	0.14	0.11
Bread	NA	1.49	0.05	0.11	0.14	0.11
Fruits and Vegetables	NA	0.28	0.05	0.11	0.14	0.11
Dairy Products	NA	0.72	0.05	0.11	0.14	0.11
Yard Trimmings	NA	0.36	0.05	0.14	0.11	NA
Grass	NA	0.38	0.05	0.14	0.09	NA
Leaves	NA	0.28	0.05	0.14	0.12	NA
Branches	NA	0.58	0.05	0.14	0.15	NA
Mixed Paper (general)	0.07	0.89	0.05	NA	NA	NA
Mixed Paper (primarily residential)	0.07	0.86	0.05	NA	NA	NA
Mixed Paper (primarily from offices)	0.03	0.84	0.05	NA	NA	NA
Mixed Metals	0.23	0.02	0.01	NA	NA	NA
Mixed Plastics	0.22	0.02	2.34	NA	NA	NA
Mixed Recyclables	0.09	0.75	0.11	NA	NA	NA
Food Waste	NA	0.68	0.05	0.11	NA	NA
Mixed Organics	NA	0.54	0.05	0.13	NA	NA
Mixed MSW	NA	0.58	0.43	NA	NA	NA
Carpet	NA	0.02	1.68	NA	NA	NA
Desktop CPUs	0.01	0.02	0.40	NA	NA	NA
Portable Electronic Devices	0.02	0.02	0.89	NA	NA	NA
Flat-panel Displays	0.02	0.02	0.74	NA	NA	NA
CRT Displays	NA	0.02	0.64	NA	NA	NA
Electronic Peripherals	0.05	0.02	2.23	NA	NA	NA
Hard-copy Devices	0.01	0.02	1.92	NA	NA	NA
Mixed Electronics	0.02	0.02	0.96	NA	NA	NA
Clay Bricks	NA	0.02	NA	NA	NA	NA
Concrete	0.01	0.02	NA	NA	NA	NA
Fly Ash	0.01	0.02	NA	NA	NA	NA
Tires	0.10	0.02	2.21	NA	NA	NA
Asphalt Concrete	0.004	0.02	NA	NA	NA	NA
Asphalt Shingles	0.03	0.02	0.70	NA	NA	NA
Drywall	NA	0.02	NA	NA	NA	NA
Fiberglass Insulation	0.05	0.02	NA	NA	NA	NA
Structural Steel	0.04	0.02	NA	NA	NA	NA
Vinyl Flooring	NA	0.02	0.29	NA	NA	NA
Wood Flooring	NA	0.18	0.08	NA	NA	NA

Source:

U.S. Environmental Protection Agency, Office of Resource Conservation and Recovery (December 2023) Documentation for Greenhouse Gas Emission and Energy Factors used in the Waste Reduction Model (WARM). Factors from tables provided in the Management Practices Chapters and Background Chapters. WARM Version 16, December 2023 release. Additional data provided by EPA, WARM-16 Background Data.

Notes:

These factors do not include any avoided emissions impact from any of the disposal methods. All the factors presented here include transportation emissions, which are optional in the Scope 3 Calculation Guidance, with an assumed average distance traveled to the processing facility.

AR4 GWP values are used to convert all waste emission factors into CO<sub>2</sub>e.

Short ton = 2000 lbs.

<sup>a</sup> Recycling emissions include transport to recycling facility and sorting of recycled materials at material recovery facility. This is consistent with the GHG Protocol Scope 3 guidance, and includes the voluntary transportation emissions, with an assumed average distance traveled to the processing facility.

<sup>b</sup> Landfilling emissions include transport to landfill, equipment use at landfill and landfill CH<sub>4</sub> emissions from anaerobic decomposition of biogenic carbon compounds. Landfill CH<sub>4</sub> is based on typical landfill gas collection practices, average landfill moisture conditions, and U.S.-average non-baseload electricity grid mix.

<sup>c</sup> Combustion emissions include transport to waste-to-energy facility and combustion-related non-biogenic CO<sub>2</sub> and N<sub>2</sub>O. This is consistent with the GHG Protocol Scope 3 guidance, and includes the voluntary transportation emissions, with an assumed average distance traveled to the processing facility.

<sup>d</sup> Composting emissions include transport to compost facility, equipment use at compost facility and CH<sub>4</sub> and N<sub>2</sub>O emissions during composting. This is consistent with the GHG Protocol Scope 3 guidance, and includes the voluntary transportation emissions, with an assumed average distance traveled to the processing facility.

**Table 10 Scope 3 Category 6: Business Travel and Category 7: Employee Commuting**

These factors are intended for use in the distance-based method defined in the Scope 3 Calculation Guidance. If fuel data are available, then the fuel-based method should be used, with factors from Tables 2 through 5.

Vehicle Type	CO <sub>2</sub> Factor (kg CO <sub>2</sub> / unit)	CH <sub>4</sub> Factor (g CH <sub>4</sub> / unit)	N <sub>2</sub> O Factor (g N <sub>2</sub> O / unit)	Units
Passenger Car <sup>A</sup>	0.175	0.005	0.003	vehicle-mile
Light-Duty Truck <sup>B</sup>	0.955	0.026	0.023	vehicle-mile
Motorcycle	0.377	0	0.019	vehicle-mile
Intercity Rail - Northeast Corridor <sup>C</sup>	0.058	0.0055	0.0007	passenger-mile
Intercity Rail - Other Routes <sup>C</sup>	0.150	0.0117	0.0038	passenger-mile
Intercity Rail - National Average <sup>C</sup>	0.113	0.0092	0.0026	passenger-mile
Commuter Rail <sup>D</sup>	0.133	0.0105	0.0026	passenger-mile
Transit Rail (i.e. Subway, Tram) <sup>E</sup>	0.093	0.0075	0.0010	passenger-mile
Bus	0.071	0	0.0021	passenger-mile
Air Travel - Short Haul (< 300 miles)	0.207	0.0064	0.0066	passenger-mile
Air Travel - Medium Haul (>= 300 miles, < 2300 miles)	0.129	0.0006	0.0041	passenger-mile
Air Travel - Long Haul (>= 2300 miles)	0.163	0.0006	0.0052	passenger-mile

Source:

CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions data for highway vehicles are from Table 2-13 of the EPA (April 2023) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990–2021 data.

Vehicle-miles and passenger-miles data for highway vehicles are from Table VM-1 of the Federal Highway Administration Highway Statistics (January 2024); 2021 data.

Fuel consumption data and passenger-miles data for rail are from Tables A.14 - A.16, 10-10, and 7.3 - 7.4 of the Transportation Energy Data Book: Edition 40 (June 2022); 2019 data. Fuel consumption was converted to emissions by using fuel and electricity emission factors presented in the tables above.

Intercity Rail factors from communication with Amtrak, March 2020. These are based on 2019 values.

Air Travel factors from 2022 Guidelines to Defra / DECC's GHG Conversion Factors for Company Reporting. Version 2.0 June 2022. Defra air travel emission factors held constant from 2022 release (2018 activity data) to more accurately reflect the current state of business travel as the 2023 Defra release reflects significantly reduced load factors during COVID-19.

Notes:

The factors represented in the table above represent combustion emissions only (tank-to-wheel) and do not represent upstream emissions or well-to-wheel emissions.

Changes from prior year values partially due to a methodology change in the allocation of emissions to vehicle type.

<sup>A</sup> Passenger car: includes passenger cars, minivans, SUVs, and small pickup trucks (vehicles with wheelbase less than 121 inches).

<sup>B</sup> Light-duty truck: includes full-size pickup trucks, full-size vans, and extended-length SUVs (vehicles with wheelbase greater than 121 inches).

<sup>C</sup> Intercity rail: Amtrak long-distance rail between major cities. Northeast Corridor extends from Boston to Washington D.C. Other Routes are all routes outside the Northeast Corridor.

<sup>D</sup> Commuter rail: rail service between a central city and adjacent suburbs (also called regional rail or suburban rail).

<sup>E</sup> Transit rail: rail typically within an urban center, such as subways, elevated railways, metropolitan railways (metro), streetcars, trolley cars, and trams.

Global Warming Potential

Table 11 Global Warming Potential (GWP)

Industrial Designation or Common Name	Chemical Formula	100-Year GWP
Carbon dioxide	CO <sub>2</sub>	1
Methane	CH <sub>4</sub>	28
Nitrous oxide	N <sub>2</sub> O	265
HFC-23	CHF <sub>3</sub>	12,400
HFC-32	CH <sub>2</sub> F <sub>2</sub>	677
HFC-41	CH <sub>3</sub> F	116
HFC-125	CHF <sub>2</sub> CF <sub>3</sub>	3,170
HFC-134	CHF <sub>2</sub> CHF <sub>2</sub>	1,120
HFC-134a	CH <sub>2</sub> FCF <sub>3</sub>	1,300
HFC-143	CH <sub>3</sub> FCF <sub>2</sub>	328
HFC-143a	CH <sub>3</sub> CF <sub>3</sub>	4,800
HFC-152	CH <sub>3</sub> CHF <sub>2</sub> F	16
HFC-152a	CH <sub>3</sub> CHF <sub>2</sub>	138
HFC-161	CH <sub>3</sub> CH <sub>2</sub> F	4
HFC-227ea	CF <sub>3</sub> CHFCF <sub>3</sub>	3,350
HFC-236cb	CH <sub>3</sub> FCF <sub>2</sub> CF <sub>3</sub>	1,210
HFC-236ea	CHF <sub>2</sub> CHFCF <sub>3</sub>	1,330
HFC-238fa	CF <sub>3</sub> CH <sub>2</sub> CF <sub>3</sub>	8,060
HFC-245ca	CH <sub>3</sub> FCF <sub>2</sub> CHF <sub>2</sub>	716
HFC-245fa	CHF <sub>2</sub> CH <sub>2</sub> CF <sub>3</sub>	858
HFC-365mfc	CH <sub>3</sub> CF <sub>2</sub> CH <sub>2</sub> CF <sub>3</sub>	804
HFC-43-10mee	CF <sub>3</sub> CHFCF <sub>2</sub> CF <sub>3</sub>	1,650
Sulfur hexafluoride	SF <sub>6</sub>	23,500
Nitrogen trifluoride	NF <sub>3</sub>	16,100
PFC-14	CF <sub>4</sub>	6,630
PFC-116	C <sub>2</sub> F <sub>6</sub>	11,100
PFC-218	C <sub>3</sub> F <sub>8</sub>	8,900
PFC-318	c-C <sub>4</sub> F <sub>8</sub>	9,540
PFC-31-10	C <sub>4</sub> F <sub>10</sub>	9,200
PFC-41-12	C <sub>4</sub> F <sub>12</sub>	8,550
PFC-51-14	C <sub>5</sub> F <sub>14</sub>	7,910
PFC-91-18	C <sub>10</sub> F <sub>18</sub>	7,190

Source:

100-year GWP values from IPCC Fifth Assessment Report (AR5), 2013, Chapter 8, Table 8.A.1, Lifetimes, Radiative Efficiencies and Metric Values.

IPCC AR5 was published in 2013 and is among the most current and comprehensive peer-reviewed assessments of climate change. AR5 provides revised GWP values of several GHGs relative to the values provided in previous assessment reports, following advances in scientific knowledge on the radiative efficiencies and atmospheric lifetimes of these GHGs.

Table 12 Global Warming Potential (GWP) for Blended Refrigerants

ASHRAE #	100-year GWP	Blend Composition
R-401A	18	53% HCFC-22, 34% HCFC-124, 13% HFC-152a
R-401B	15	61% HCFC-22, 28% HCFC-124, 11% HFC-152a
R-401C	21	33% HCFC-22, 52% HCFC-124, 15% HFC-152a
R-402A	1,902	38% HCFC-22, 60% HFC-125, 2% propane
R-402B	1,205	60% HCFC-22, 38% HFC-125, 2% propane
R-403B	3,471	56% HCFC-22, 39% PFC-218, 5% propane
R-404A	3,943	44% HFC-125, 4% HFC-134a, 52% HFC-143a
R-406A	0	55% HCFC-22, 41% HCFC-142b, 4% isobutane
R-407A	1,923	20% HFC-32, 40% HFC-125, 40% HFC-134a
R-407B	2,547	10% HFC-32, 70% HFC-125, 20% HFC-134a
R-407C	1,624	23% HFC-32, 25% HFC-125, 52% HFC-134a
R-407D	1,487	15% HFC-32, 15% HFC-125, 70% HFC-134a
R-408A	2,430	47% HCFC-22, 7% HFC-125, 46% HFC-143a
R-409A	0	60% HCFC-22, 25% HCFC-124, 15% HCFC-142b
R-410A	1,924	50% HFC-32, 50% HFC-125
R-410B	2,048	45% HFC-32, 55% HFC-125
R-411A	15	87.5% HCFC-22, 11% HFC-152a, 1.5% propylene
R-411B	4	94% HCFC-22, 3% HFC-152a, 3% propylene
R-414A	0	51% HCFC-22, 28.5% HCFC-124, 16.5% HCFC-142b, 4% isobutane
R-414B	0	50% HCFC-22, 39% HCFC-124, 9.5% HCFC-142b, 1.5% isobutane
R-417A	2,127	46.6% HFC-125, 50% HFC-134a, 3.4% butane
R-422A	2,947	85.1% HFC-125, 11.5% HFC-134a, 3.4% isobutane
R-422D	2,473	65.1% HFC-125, 31.5% HFC-134a, 3.4% isobutane
R-424A	3,104	50.5% HFC-125, 47% HFC-134a, 1% butane, 0.9% isobutane, 0.6% isopentane
R-426A	1,371	5.1% HFC-125, 93% HFC-134a, 1.3% butane, 0.6% isobutane
R-428A	3,417	77.5% HFC-125, 20% HFC-143a, 1.9% isobutane, 0.6% propane
R-434A	3,075	63.2% HFC-125, 16% HFC-134a, 18% HFC-143a, 2.8% isobutane
R-507A	3,985	50% HFC-125, 50% HFC-143a
R-508A	11,607	39% HFC-23, 61% PFC-116
R-508B	11,698	46% HFC-23, 54% PFC-116

Source:

100-year GWP values from IPCC Fifth Assessment Report (AR5), 2013, Chapter 8, Table 8.A.1, Lifetimes, Radiative Efficiencies and Metric Values.

GWP values of blended refrigerants are based only on their HFC and PFC constituents, which are based on data from <https://www.epa.gov/snapi/compositions-refrigerant-blends>.