

Attachment A

Charles River Temperature Limits by Time of Year in the Zone of Passage and Habitat (ZPH)¹

Time of Year	Max. Temperature ²	Dissolved Oxygen	Location
March 30 - April 1*	Not to exceed 4 hour average ³ of 13.3°C (56.0°F) at each Monitoring Point ⁴ in the ZPH.	Not less than 5.0 mg/l ^{5,6} for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations ⁷ 2, 3, 4, 5, 6, 7 and 8. Each Monitoring Point in the ZPH must meet this temperature limit.
April 2 - April 14*	Not to exceed a 4 hour average of 16.1°C (61.0°F) at each Monitoring Point.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, 7 and 8. Each Monitoring Point in the ZPH must meet this temperature limit.
April 15 - April 30**	Not to exceed 4 hour average of 18.3°C (65.0°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, 7 and 8. Each Monitoring Point in the ZPH must meet this temperature limit.
May 1 - May 10**	Not to exceed 4 hour average of 19.1°C (66.4°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, 7 and 8. Each Monitoring Point in the ZPH must meet this temperature limit.
May 1 - May 14**	Not to exceed a 4 hour average of 18.3°C (65.0°F) at each Monitoring Point.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Station 8. Each Monitoring Points located at 2.0 ft. and 6.0 ft. must meet this temperature limit.
May 11 - May 14**	Not to exceed a 4 hour average of 20.0°C (68.0°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, and 7. Each Monitoring Point in the ZPH must meet this temperature limit.
May 15 - May 22**	Not to exceed a 4 hour average of 20.0°C (68.0°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, 7 and 8. Each Monitoring Point in the ZPH must meet this temperature limit.
May 23 - May 31**	Not to exceed a 4 hour average of 21.1°C (70.0°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, 7 and 8. Each Monitoring Point in the ZPH must meet this temperature limit.

Time of Year	Max. Temperature ²	Dissolved Oxygen	Location
June 1 to June 7**	Not to exceed a 4 hour average of 21.1°C (70.0°F) at each Monitoring Point.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Station 8. Each Monitoring Point, located at 2.0 ft. and 6.0 ft., must meet this temperature limit.
June 1 - June 7**	Not to exceed a 4 hour average of 22.2°C (72.0°F) at each Monitoring Point in the ZPH..	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, and 7. Each Monitoring Point in the ZPH must meet this temperature limit.
June 8 - June 11	Not to exceed a 4 hour average of 23.9°C (75.0°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, 7 and 8. Each Monitoring Point in the ZPH must meet this temperature limit.
June 12 - Oct. 31	Not to exceed a 4 hour average of 28°C (83.0°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, 6, 7 and 8.
November 1 to March 29 (chill period)** ** *	Not to exceed a 4 hour average of 10.0°C (50.0°F) at each Monitoring Point in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, 4, 5, and 6

Time of Year	Max. Temperature ²	Dissolved Oxygen	Location
The Chill Period Shall Begin on: 1) Nov. 1, providing that 1) Max. Temperature provisions are met (see next column) 2) if not begun under condition 1) above, then between November 1 and November 14, when 2) Max Temperature provisions are met (see next column) 3) if not begun under conditions 1) or 2) above, then beginning on November 15, provided that 3) Max Temp. provisions are met (see next column)	(The numbered items below correspond to the same numbered items in the “Time of Year” column) 1) Maintain water temperatures in the In-Zone transect ZPH, based on a temperature average of the 2.0 ft. and 6.0 ft .Monitoring Points over a four hour period, at or below 10.0°C (50.0°F) for three consecutive days. 2) Condition 1 (see Time of Year column) has been met, or when Monitoring Station 1 temperature averaged from the 2.0 ft. and 6.0 ft. Monitoring Points over a four hour period, is at or below 10.0°C (50.0°F) for three consecutive days. 3) if conditions 1) and 2) have not been met, maintain the river temperatures in the ZPH at no more than 10.0°C (50.0°F). If background temperature exceeds 10.0°C (50.0°F), ZPH may rise to 1.1°C (2.0°F) above background temperature. Background temperature, for this purpose only, is defined as the warmer of the 2.0 ft. or 6.0 ft. Monitoring Points located at Monitoring Station 1. Once Max Temperature conditions 1) or 2) are met, this condition no longer applies.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, (4, 5 and 6, if in the ZPH) based on a temperature average of Monitoring Points at 2.0 ft. and 6.0 ft.

Time of Year	Max. Temperature ²	Dissolved Oxygen	Location
The Chill Period will end on March 29th, when 149 days have met the Max. Temperature provisions: 1) if by March 29th the temperatures have not met Max Temperature provisions for 149 days, then the Facility will operate in accordance with 1) Max. Temperature provisions (see next column) until 149 days are met 2) The chill period will end after being in effect for 149 days or on April 13th, whichever comes first	1) maintain the river temperatures in the ZPH at no more than 10.0°C (50.0°F). If background temperature exceeds 10.0°C (50.0°F), ZPH may rise to 1.1°C (2.0°F) above background temperature. Background temperature, for this purpose only, is defined as the warmer of the 2.0 ft. or 6.0 ft. Monitoring Points located at Monitoring Station 1.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Monitoring Stations 2, 3, (4, 5 and 6, if in the ZPH) based on a temperature average of Monitoring Points at 2.0 ft. and 6.0 ft.

Time of Year	Max. Temperature ²	Dissolved Oxygen	Location
All Year	1) The maximum temperature differential limit of 2.8°C (5°F) or “Delta T of 2.8 °C (5°F)” will be determined by comparing a) the 24 hour block time average (00:00 [midnight]-23:59) of temperatures recorded at Monitoring Points at 2.0 ft and 6.0 ft. (averaged together) at Station 1 with b) the 24 hour block average (00:00 [midnight]-23:59) of the temperatures recorded at Monitoring Points at 2.0 ft. and 6.0 ft. (averaged together) at each of the Monitoring Stations in the ZPH.	Not less than 5.0 mg/l for a 4 hour average at each Monitoring Point in the ZPH.	Compare the average of the 2.0 ft. and 6.0 ft. Monitoring Points at Monitoring Station 1, with the the 2.0 ft and 6.0 ft average at each of Monitoring Stations 2, 3, 4 and 8 in the ZPH. At Station 7 only, the average of the 6.0 ft and 12.0 ft Monitoring Points (instead of the 2.0 ft and 6.0 ft average) may be compared with the Monitoring Station 1 average, if this will result in compliance with the Delta T limit.

* The Start Date of this temperature limit will be the day after the yellow perch chill period ends, if later than March 29.


** If the Monitoring Station 1 (background station) temperature, averaged from the 2.0 ft and 6.0 ft Monitoring Points over a four hour period, exceeds the established limits identified for a given time period, then the Station 1 average temperature becomes the applicable temperature limit. Exception: For six non-consecutive 24 hour periods only during the time-frame from April 15 to June 7, if the Monitoring Station 1 average temperature is at or above the prescribed limit, the Facility will be allowed to operate such that the river temperatures downstream of Monitoring Station 1 in the ZPH are 1.1°C (2.0°F) above background up to a maximum temperature of 22.2°C (72.0°F); except for the June 1 to June 7 time period, where the temperature may be 1.1°C (2.0°F) above the Monitoring Station 1 average temperature up to a maximum temperature of 23.3°C (74.0°F). To ensure that all six (6) 24 hour periods are not used within a brief time frame, only three (3) exceedances will be allowed in any four week period. Unused days will not be carried over to future years.

*** If “Chill Period” temperature has not been met by November 1, then Chill Period Limits will be in effect when the Monitoring Station 1 (background station) temperature averaged from the 2.0 ft. and 6.0 ft. Monitoring Points over a four hour period, reach 10.0°C (50.0°F) or below for three consecutive days.

Footnotes:

1. The “Zone of Passage and Habitat” (ZPH) is the area of the lower Charles River Basin that is viable habitat (temperature and dissolved oxygen levels causing no acute or chronic effects), spanning from the upstream location of the Zone Boundary Transect to the downstream location of the New Charles River Dam and Locks (Attachment B). The ZPH is defined by compliance with temperature and dissolved oxygen limits at the following Monitoring Points: All Monitoring Points at Station 2 must be met at all times. This station is located upstream of the Longfellow Bridge, approximately half the distance between the Boston and Cambridge shores of the Charles River. The ZPH also includes, at all times, all Monitoring Points at Station 3 (Boston side). The ZPH includes, at all times, all Monitoring Points at Station 4, with the exception of the 2 foot monitoring point. The ZPH includes, at all times, a sufficient number of Monitoring Points at Stations 5 and 6 such that at least $\frac{1}{2}$ of the total number of Monitoring Points that meet the dissolved oxygen limit of 5.0 mg/l in the In-Zone Transect (Stations 3, 4, 5 and 6) meet the temperature limit in effect. These Monitoring Points must be contiguous with Monitoring Points at Station 4. In addition, the ZPH includes, at all times that Monitoring Station 7 (located at the Science Museum lock) is required, at least two contiguous Monitoring Points (2.0 ft. and 6.0 ft., or 6.0 ft and 12.0 ft.). The ZPH also includes, at all times that Monitoring Station 8 (upstream of the New Charles River Dam and Locks) is required, the 2.0 ft. and 6.0 ft. Monitoring Point.
2. Should the 4 hour average temperature of the average of the 2.0 ft. and 6.0 ft. Monitoring Points of Monitoring Station 1 near the Boston University Bridge (Background Station) exceed any of the applicable temperature limits specified in this table for the corresponding time period, the temperature at Monitoring Station 1 will become the maximum temperature limit until the average temperature at 2.0 ft. and 6.0 ft. of the Monitoring Points at Monitoring Station 1 fall below the applicable maximum temperatures herein.
3. The 4 hour average consists of a minimum of one instantaneous measurement, at evenly spaced time intervals and taken within each of the four discrete one hour time periods (minimum of four total readings). If more than one reading is used within a discrete hour, the readings must be taken at evenly spaced time intervals within the hour (e.g. every 15 minutes) and the same number of readings, at the same temporal spacing, must be used for all hours within the four hour average block for the calculation of the four hour average temperature. Four hour averages shall be reported daily for the following four hour time blocks: 0:00 - 3:59, 4:00 - 7:59, 8:00 - 11:59, 12:00 - 15:59, 16:00 - 19:59 and 20:00 - 23:59.
4. A Monitoring Point is an underwater probe at a discrete depth which records temperature and other water quality parameters when specified.
5. Dissolved oxygen concentrations are for all depths except where indicated.
6. A dissolved oxygen concentration below 5 mg/l, when measured at a Monitoring Point required to be in the ZPH, is not a violation of the permit limit. If the dissolved oxygen concentration is less than 5 mg/l at any Monitoring Point, then that Monitoring Point is not considered to be located in suitable habitat. Therefore, that Monitoring Point will no longer be a temperature compliance point. In the case of the In-Zone Transect (Monitoring Stations 3, 4, 5 and 6) a Monitoring Point with a dissolved oxygen level below 5 mg/l will not be used in the calculation to verify that at least $\frac{1}{2}$ of the Monitoring Points of the In-Zone Transect meet the temperature limit in effect for a corresponding time period.
7. A Monitoring Station is a vertical array of temperature and other sensors suspended by a buoy or attached to a permanent structure in the Charles River.

Aerial View of Mirant Kendall Station and Instream Continuous Monitoring Stations

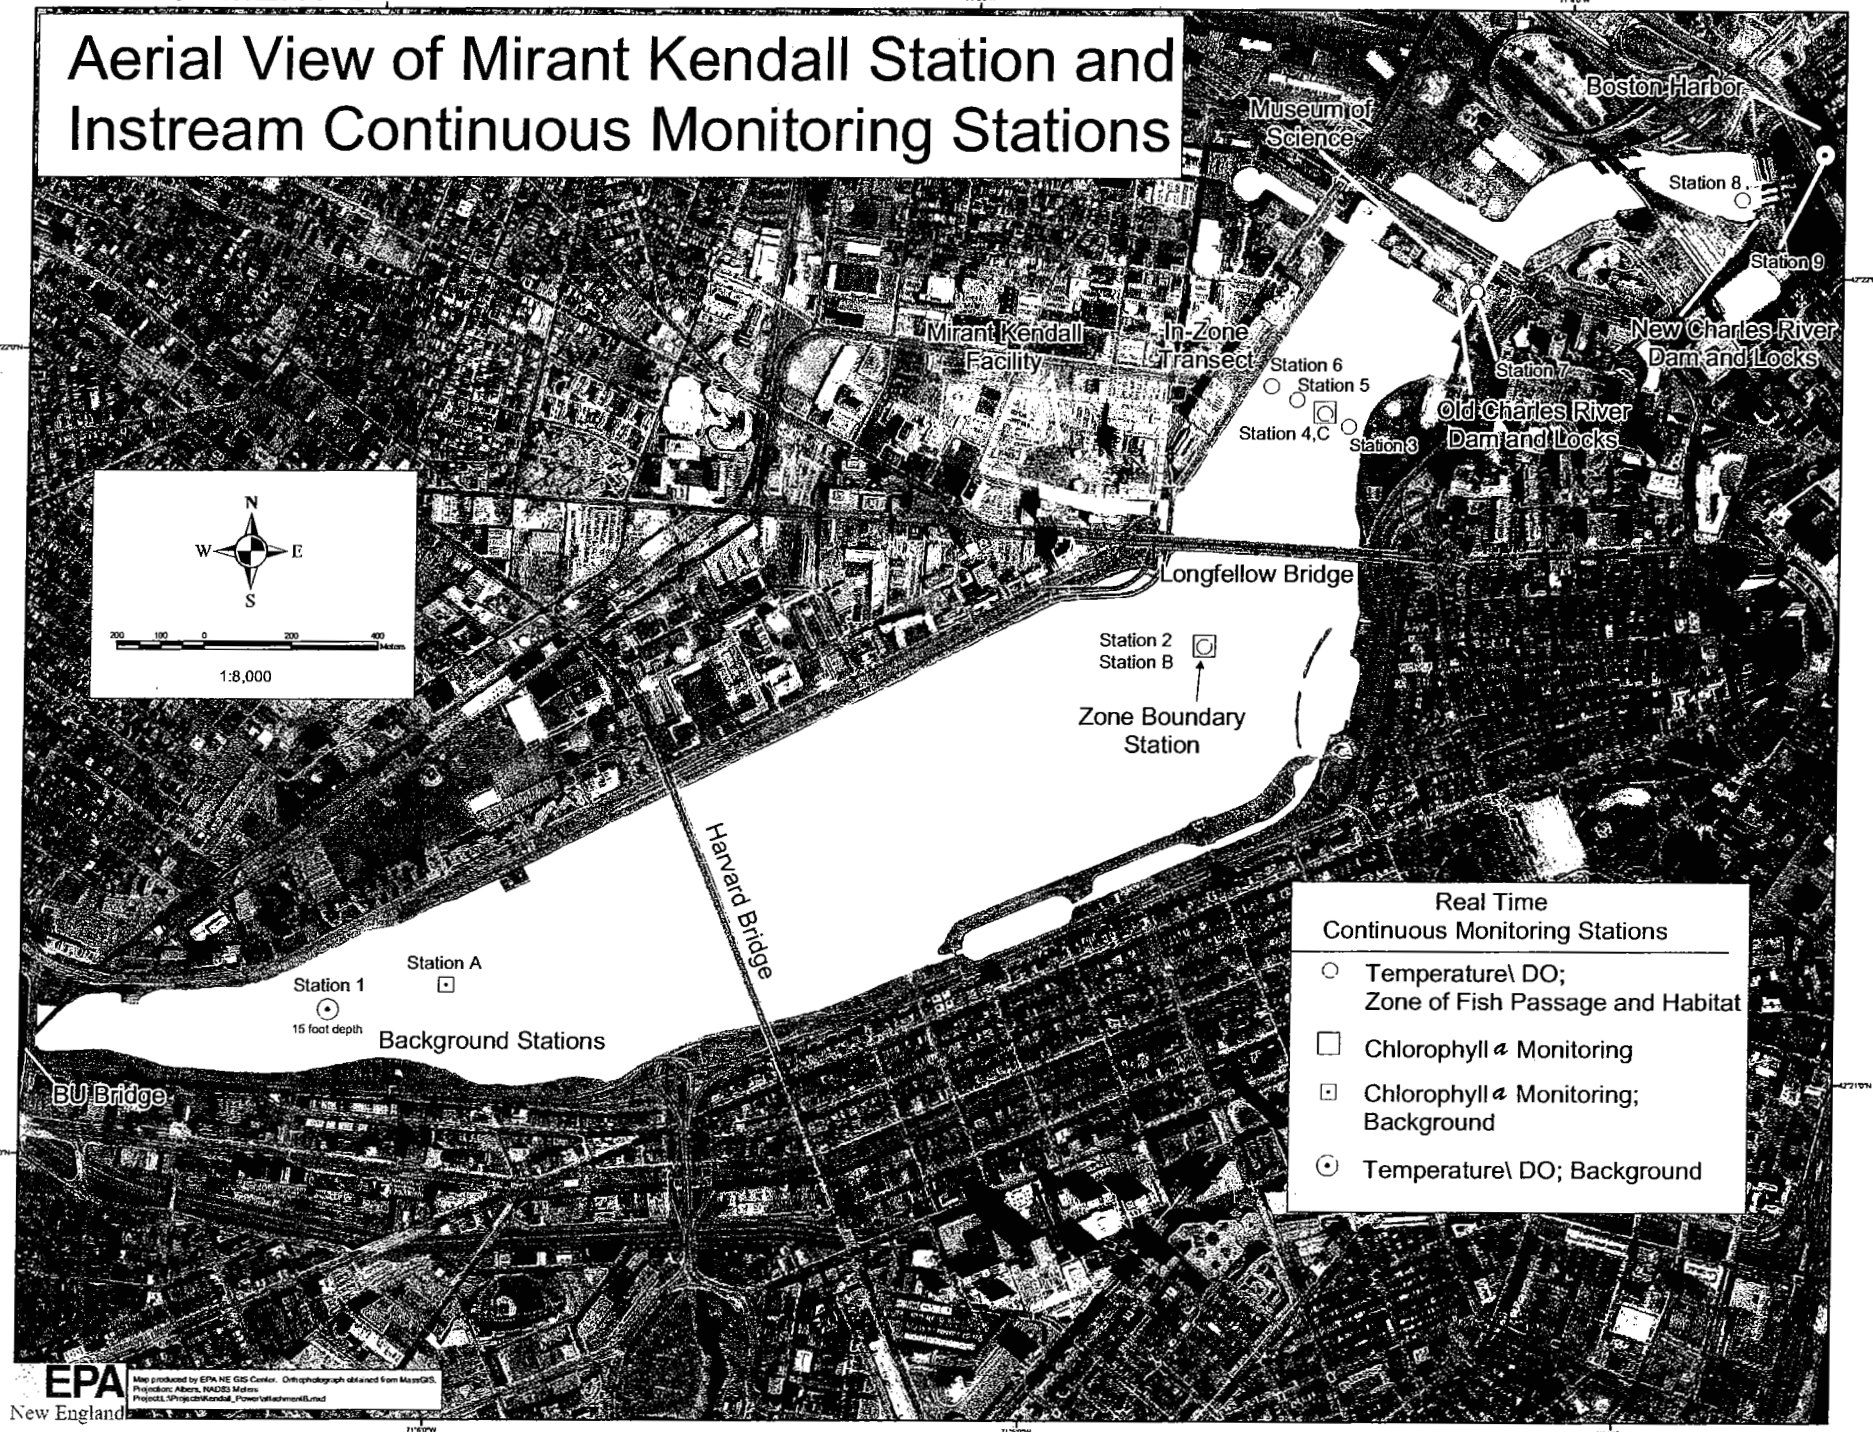

ATTACHMENT C

FRESHWATER CHRONIC

TOXICITY TEST PROCEDURE AND PROTOCOL

I. GENERAL REQUIREMENTS

The permittee shall conduct acceptable chronic (and modified acute) toxicity tests on three samples collected during the test period. The following tests shall be performed in accordance with the appropriate test protocols described below:

- **Daphnid (Ceriodaphnia dubia) Survival and Reproduction Test.**
- **Fathead Minnow (Pimephales promelas) Larval Growth and Survival Test.**

Chronic and acute toxicity data shall be reported as outlined in Section VIII. The chronic fathead minnow and daphnid tests can be used to calculate an LC50 at the end of 48 hours of exposure when both an acute (LC50) and a chronic (C-NOEC) test is specified in the permit.

II. METHODS

Methods to follow are those recommended by EPA in:

Lewis, P.A. et al. Short Term Methods For Estimating The Chronic Toxicity of Effluents and Receiving Water to Freshwater Organisms, Third Edition. Environmental Monitoring Systems Laboratory, U.S. Environmental Protection Agency, Cincinnati, OH. July 1994, EPA/600/4-91/002.

Any exceptions are stated herein.

III. SAMPLE COLLECTION

For each sampling event, three discharge samples shall be collected. Fresh samples are necessary for Days 1, 3, and 5 (see Section V. for holding times). The initial sample is used to start the test on Day 1, and for test solution renewal on Day 2. The second sample is collected for use at the start of Day 3, and for renewal on Day 4. The third sample is used for renewal on Days 5, 6, and 7 (or until termination for the Ceriodaphnia dubia test). The initial (Day 1) sample will be analyzed chemically (see Section VI). Day 3 and 5 samples will be held until test completion. If either the Day 3 or 5 renewal sample is of sufficient potency to cause lethality to 50 percent or more test organisms in any of the dilutions for either species, then a chemical analysis shall be performed on the appropriate sample(s) as well.

Aliquots shall be split from the samples, containerized and preserved (as per 40 CFR Part 136) for chemical and physical analyses. The remaining samples shall be measured for total residual chlorine and dechlorinated (if detected) in the laboratory using sodium thiosulfate for subsequent toxicity testing. (Note that EPA approved test methods require that samples collected for metals analyses be preserved immediately after collection.) Grab samples must be used for pH, temperature, and total residual chlorine (as per 40 CFR Part 122.21).

Standard Methods for the Examination of Water and Wastewater also describes dechlorination of samples (APHA, 1992). Dechlorination can be achieved using a ratio of 6.7 mg/L anhydrous sodium thiosulfate to reduce 1 mg/L chlorine. A thiosulfate control (maximum amount of thiosulfate in lab control or receiving water) should also be run.

All samples held overnight shall be refrigerated at 4°C.

IV. DILUTION WATER

Grab samples of dilution water used for chronic toxicity testing shall be collected from the receiving water at a point upstream of the discharge free from toxicity or other sources of contamination. Avoid collecting near areas of obvious road or agricultural runoff, storm sewers or other point source discharges. An additional control (0% effluent) of a standard laboratory water of known quality shall also be tested.

If the receiving water diluent is found to be, or suspected to be toxic or unreliable, an alternate standard dilution water of known quality with a hardness, pH, conductivity, alkalinity, organic carbon, and total suspended solids similar to that of the receiving water may be substituted **AFTER RECEIVING WRITTEN APPROVAL FROM THE PERMIT ISSUING AGENCY(S)**. Written requests for use of an alternate dilution water should be mailed with supporting documentation to the following address:

Director
Office of Ecosystem Protection
U.S. Environmental Protection Agency-New England
JFK Federal Building (CAA)
Boston, MA 02203

It may prove beneficial to have the dilution water source screened for suitability prior to toxicity testing. EPA strongly urges that screening be done prior to set up of a full definitive toxicity test any time there is question about the dilution water's ability to support acceptable performance as outlined in the 'test acceptability' section of the protocol. See Section 7 of EPA/600/4-89/001 for further information.

V. TEST CONDITIONS AND TEST ACCEPTABILITY CRITERIA

EPA New England requires that fathead minnow tests be performed using four (not three) replicates of each control and effluent concentration because the non-parametric statistical tests cannot be used with data from only three replicates. Also, if a reference toxicant test was being performed concurrently with an effluent or receiving water test and fails, both tests must be repeated.

The following tables summarize the accepted daphnid and fathead minnow toxicity test conditions and test acceptability criteria:

EPA NEW ENGLAND RECOMMENDED EFFLUENT TOXICITY TEST CONDITIONS FOR THE DAPHNID, CERIODAPHNIA DUBIA, SURVIVAL AND REPRODUCTION TEST¹

1.	Test type:	Static, renewal
2.	Temperature (°C):	25 ± 1°C
3.	Light quality: laboratory illumination	Ambient
4.	Photoperiod:	16 hr. light, 8 hr. dark
5.	Test chamber size:	30 mL
6.	Test solution volume:	15 mL
7.	Renewal of test solutions:	Daily using most recently collected sample
8.	Age of test organisms:	Less than 24 hr.; and all released within an 8 hr. period of each other.
9.	Number of neonates per test chamber:	1
10.	Number of replicate test chambers per treatment:	10
11.	Number of neonates per test concentration:	10
12.	Feeding regime:	Feed 0.1 ml each of YCT and concentrated algal suspension per exposure chamber daily.
13.	Aeration:	None
14.	Dilution water: ²	Receiving water, other surface water, synthetic soft water adjusted to the hardness and alkalinity of the receiving water (prepared using either Millipore Milli-Q ^R or equivalent deionized water and reagent grade chemicals according to EPA chronic toxicity test manual) or deionized water combined with mineral water to appropriate hardness.

- | | |
|---|--|
| 15. Effluent concentrations: ³ | 5 effluent concentrations and a control. An additional dilution at the permitted effluent concentration (% effluent) is required if it is not included in the dilution series. |
| 16. Dilution factor: | ≥ 0.5 |
| 17. Test duration: | Until 60% of control females have three broods (generally 7 days and a maximum of 8 days). |
| 18. End points: | Survival and reproduction |
| 19. Test acceptability: | 80% or greater survival and an average of 15 or more young/surviving female in the control solutions. At least 60% of surviving females in controls must produce three broods. |
| 20. Sampling requirements: | For on-site tests, samples are collected daily and used within 24 hr. of the time they are removed from the sampling device. For off-site tests a minimum of three samples are collected (i.e. days 1, 3, 5) and used for renewal (see Sec. III). Off-site tests samples must be first used within 36 hours of collection. |
| 21. Sample volume required: | Minimum 1 liter/day |

Footnotes:

1. Adapted from EPA/600/4-91/002.
2. Standard dilution water must have hardness requirements to generally reflect characteristics of the receiving water.
3. When receiving water is used for dilution, an additional control made up of standard laboratory dilution water (0% effluent) is required.

**EPA NEW ENGLAND RECOMMENDED EFFLUENT TEST CONDITIONS FOR THE
FATHEAD MINNOW (PIMEPHALES PROMELAS) LARVAL SURVIVAL
AND GROWTH TEST¹**

- | | |
|---|---|
| 1. Test type: | Static, renewal |
| 2. Temperature (°C): | 25 ± 1°C |
| 3. Light quality: | Ambient laboratory illumination |
| 4. Photoperiod: | 16 hr. light, 8 hr. dark |
| 5. Test chamber size: | 500 mL minimum |
| 6. Test solution volume: | Minimum 250 mL/replicate |
| 7. Renewal of test concentrations: | Daily using most recently collected sample. |
| 8. Age of test organisms: | Newly hatched larvae less than 24 hr. old |
| 9. No. larvae/test chamber and control: | 15 (minimum of 10) |
| 10. No. of replicate chambers/ concentration: | 4 |
| 11. No. of larvae/concentration: | 60 (minimum of 40) |
| 12. Feeding regime: | Feed 0.1 g newly hatched, distilled water-rinsed <u>Artemia</u> nauplii at least 3 times daily at 4 hr. intervals or, as a minimum, 0.15 g twice daily, 6 hrs. between feedings (at the beginning of the work day prior to renewal, and at the end of the work day following renewal). Sufficient larvae are added to provide an excess. Larvae fish are not fed during the final 12 hr. of the test. |
| 13. Cleaning: | Siphon daily, immediately before test solution renewal. |
| 14. Aeration: | None, unless dissolved oxygen (D.O.) concentration falls below 4.0 mg/L. Rate should be less than 100 bubbles/min. |

15.	Dilution water: ²	Receiving water, other surface water, synthetic soft water adjusted to the hardness and alkalinity of the receiving water (prepared using either Millipore Milli-Q ^R or equivalent deionized and reagent grade chemicals according to EPA chronic toxicity test manual) or deionized water combined with mineral water to appropriate hardness.
16.	Effluent concentrations: ³	5 and a control. An additional dilution at the permitted effluent concentration (% effluent) is required if it is not included in the dilution series.
17.	Dilution factor:	≥ 0.5
18.	Test duration:	7 days
19.	End points:	Survival and growth (weight)
20.	Test acceptability:	80% or greater survival in controls: average dry weight per control larvae equals or exceeds 0.25 mg.
21.	Sampling requirements:	For on-site tests samples are collected and used within 24 hours of the time they are removed from the sampling device. For off-site tests a minimum of three samples are collected (i.e. days 1, 3, 5) and used for renewal (see Sec.IV). Off-site tests samples must be first used within 36 hours of collection.
22.	Sample volume required:	Minimum 2.5 liters/day

Footnotes:

1. Adapted from EPA/600/4-91/002.
2. Standard dilution water must have hardness requirements to generally reflect characteristics of the receiving water.
3. When receiving water is used for dilution, an additional control made up of standard laboratory or culture water (0% effluent) is required.

VI. CHEMICAL ANALYSIS

As part of each daily renewal procedure, pH, specific conductance, dissolved oxygen, and temperature must be measured at the beginning and end of each 24-hour period in each dilution and the controls. It is also recommended that total alkalinity and total hardness be measured in the control and highest effluent concentration on the Day 1, 3, and 5 samples. The following chemical analyses shall be performed for each sampling event.

Parameter	Effluent Diluent Level (mg/l)		Minimum fication	Quanti- fication
Hardness ^{*1}	x	x		0.5
Alkalinity	x	x		2.0
pH	x	x		--
Specific Conductance	x	x		--
Total Solids and Suspended Solids	x	x		--
Ammonia	x	x		0.1
Total Organic Carbon	x	x		0.5
Total Residual Chlorine (TRC) ^{*2}	x	x		0.05
Dissolved Oxygen	x	x		1.0
<u>Total Metals</u>				
Cd	x			0.001
Cr	x			0.005
Pb	x	x		0.005
Cu	x	x		0.0025
Zn	x	x		0.0025
Ni	x	x		0.004
Al	x	x		0.02
Mg, Ca	x	x		0.05

Superscripts:

^{*1} Method 2340 B (hardness by calculation) from APHA (1992) Standard Methods for the Examination of Water and Wastewater. 18th Edition.

^{*2} Total Residual Chlorine

Either of the following methods from the 18th Edition of the APHA Standard Methods for the Examination of Water and Wastewater must be used for these analyses:

- Method 4500-CL E Low Level Amperometric Titration (the preferred method);
- Method 4500-CL G DPD Colorimetric Method.

or use USEPA Manual of Methods Analysis of Water and Wastes, Method 330.5.

VII. TOXICITY TEST DATA ANALYSIS

LC50 Median Lethal Concentration (Determined at 48 Hours)

Methods of Estimation:

- Probit Method
- Spearman-Kärber
- Trimmed Spearman-Kärber
- Graphical

Reference the flow chart on page 84 or page 172 of EPA 600/4-91/002 for the appropriate method to use on a given data set.

Chronic No Observed Effects Concentration (C-NOEC)

Methods of Estimation:

- Dunnett's Procedure
- Bonferroni's T-Test
- Steel's Many-One Rank Test
- Wilcoxin Rank Sum Test


Reference the flow charts on pages 50, 83, 96, 172, and 176 of EPA 600/4-91/002 for the appropriate method to use on a given data set.

In the case of two tested concentrations causing adverse effects but an intermediate concentration not causing a statistically significant effect, report the C-NOEC as the lowest concentration where there is no observable effect. The definition of NOEC in the EPA Technical Support Document only applies to linear dose-response data.

VIII. TOXICITY TEST REPORTING

A report of results will include the following:

- □ Description of sample collection procedures, site description;
- □ Names of individuals collecting and transporting samples, times and dates of sample collection and analysis on chain-of-custody; and
- □ General description of tests: age of test organisms, origin, dates and results of standard toxicant tests; light and temperature regime; other information on test conditions if different than procedures recommended. Reference toxicant test data should be included.
- □ All chemical/physical data generated. (Include minimum detection levels and minimum quantification levels.)
- □ Raw data and bench sheets.
- □ Provide a description of dechlorination procedures (as applicable).
- □ Any other observations or test conditions affecting test outcome.

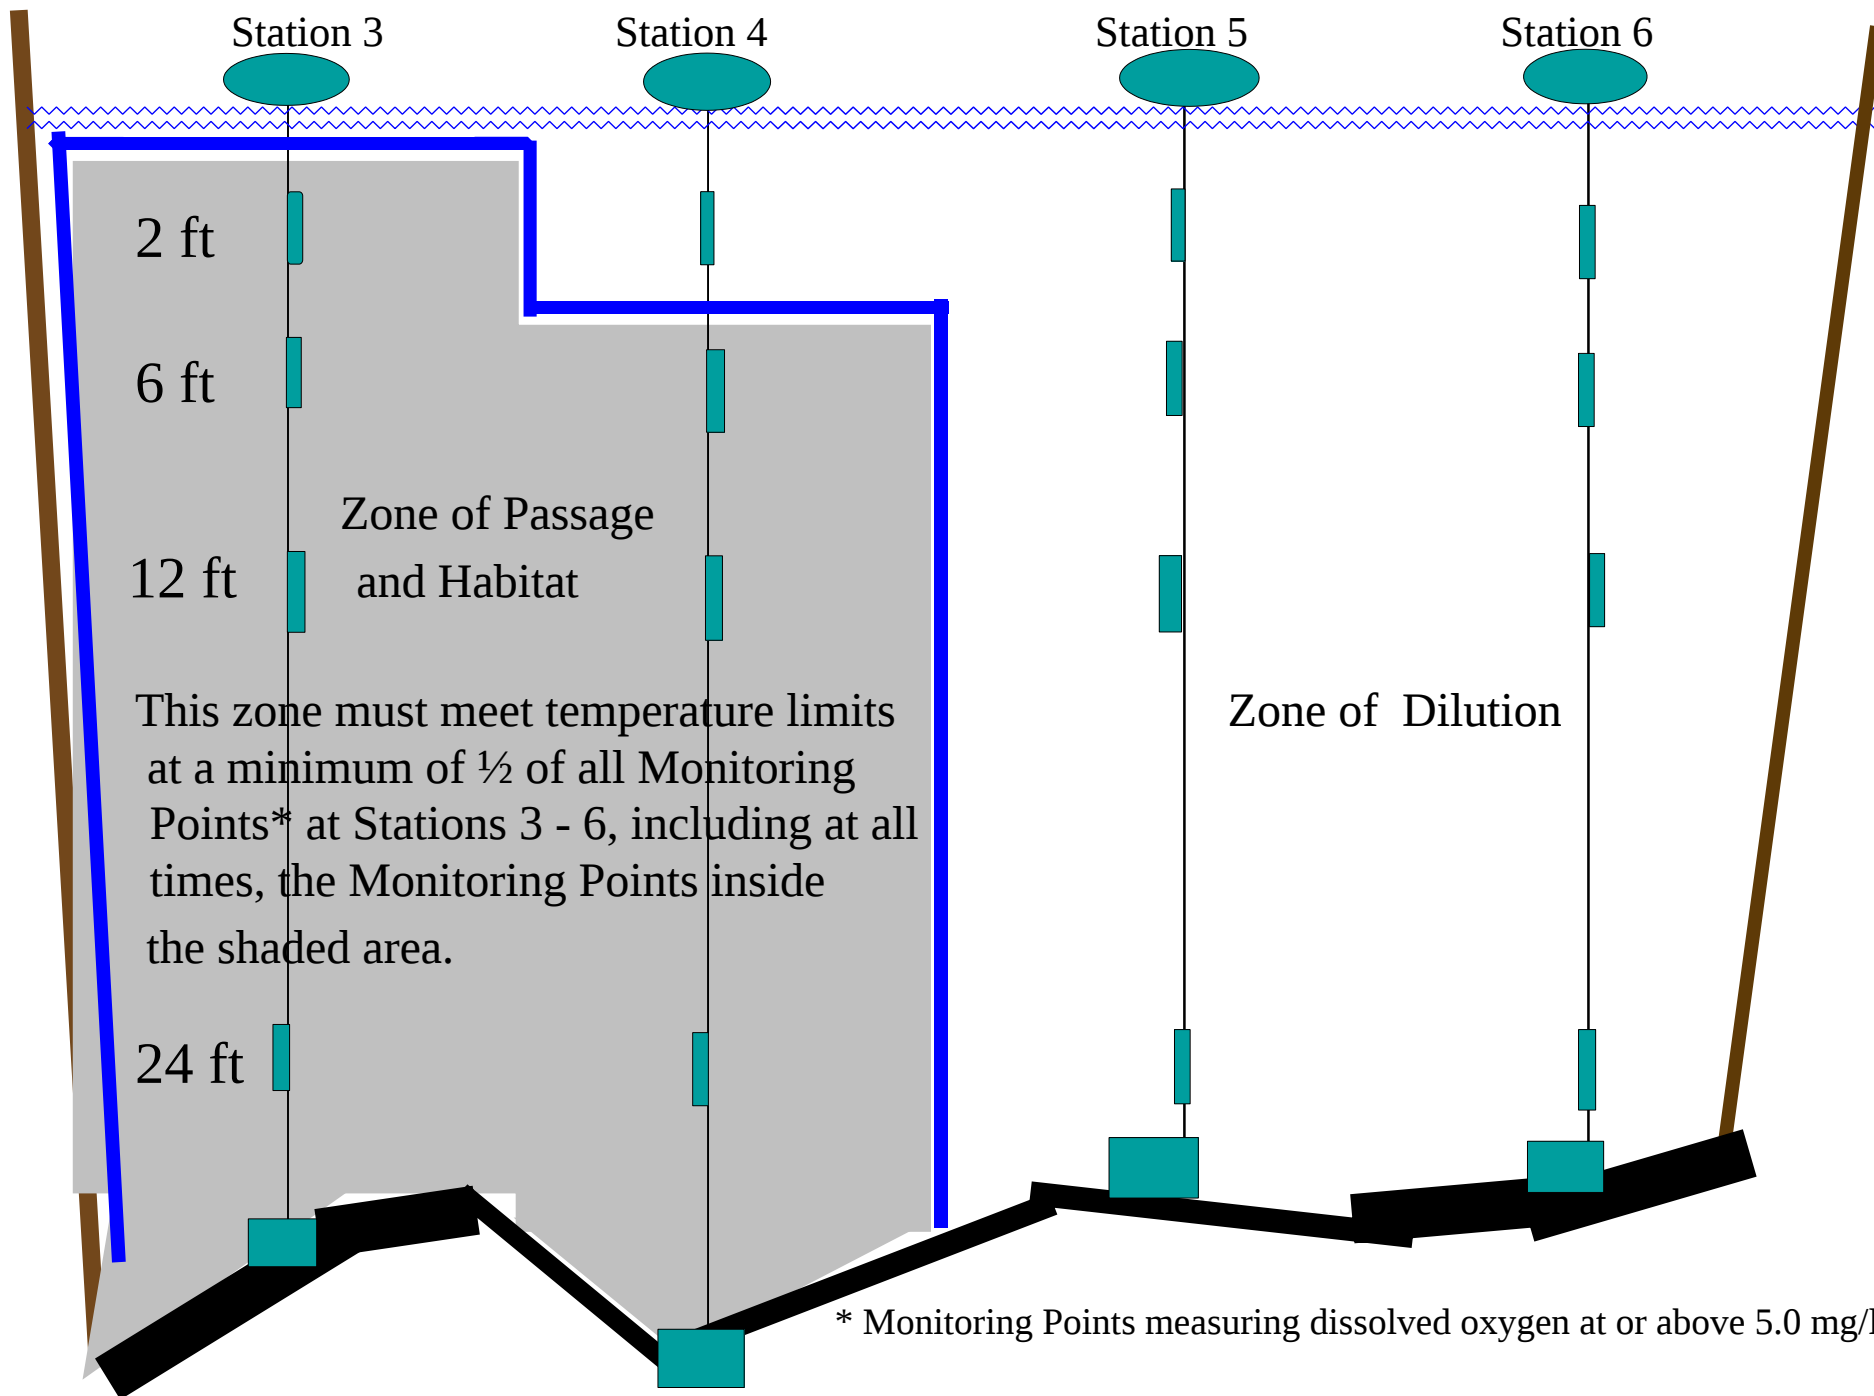

Boston shore

Temperature Page

Time: 0915

Date: 7/15/04


Cambridge shore

Station 3

Station 4

Station 5

Station 6

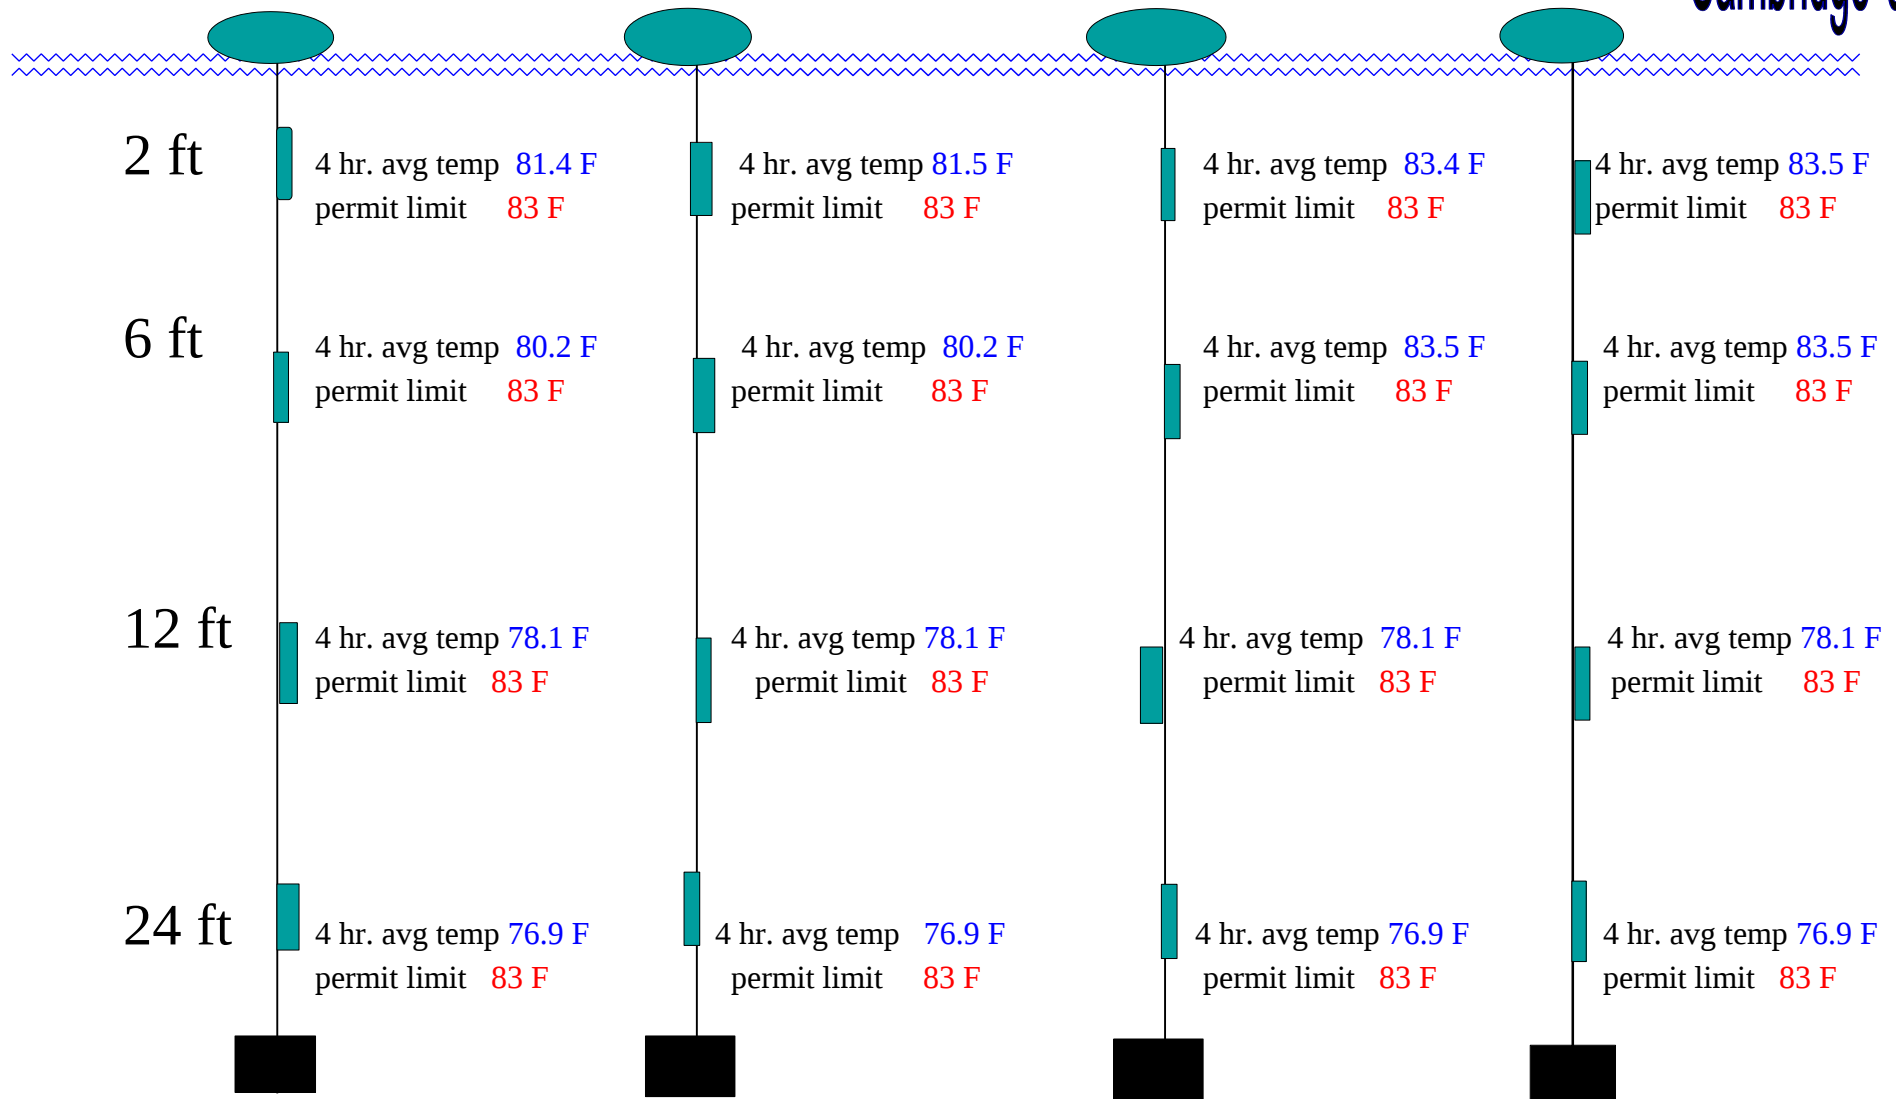

Over 50% Permit Limits Exceeded: NO Current Number of Exceedences over 50%: 0 Number of Exceedences over 50% in Past 7 Days: 0
Limits Met At All Points of Station 3: YES Limits Met At All Points of Station 4 (except 2 ft): YES


Note: A similar information page must be created for each Monitoring Station for dissolved oxygen values, if real-time continuous DO readings are required.

Temperature Page

Time: 0915

Date: 7/15/04

Station 2 (Zone Boundary Transect, Upstream of Longfellow Bridge)

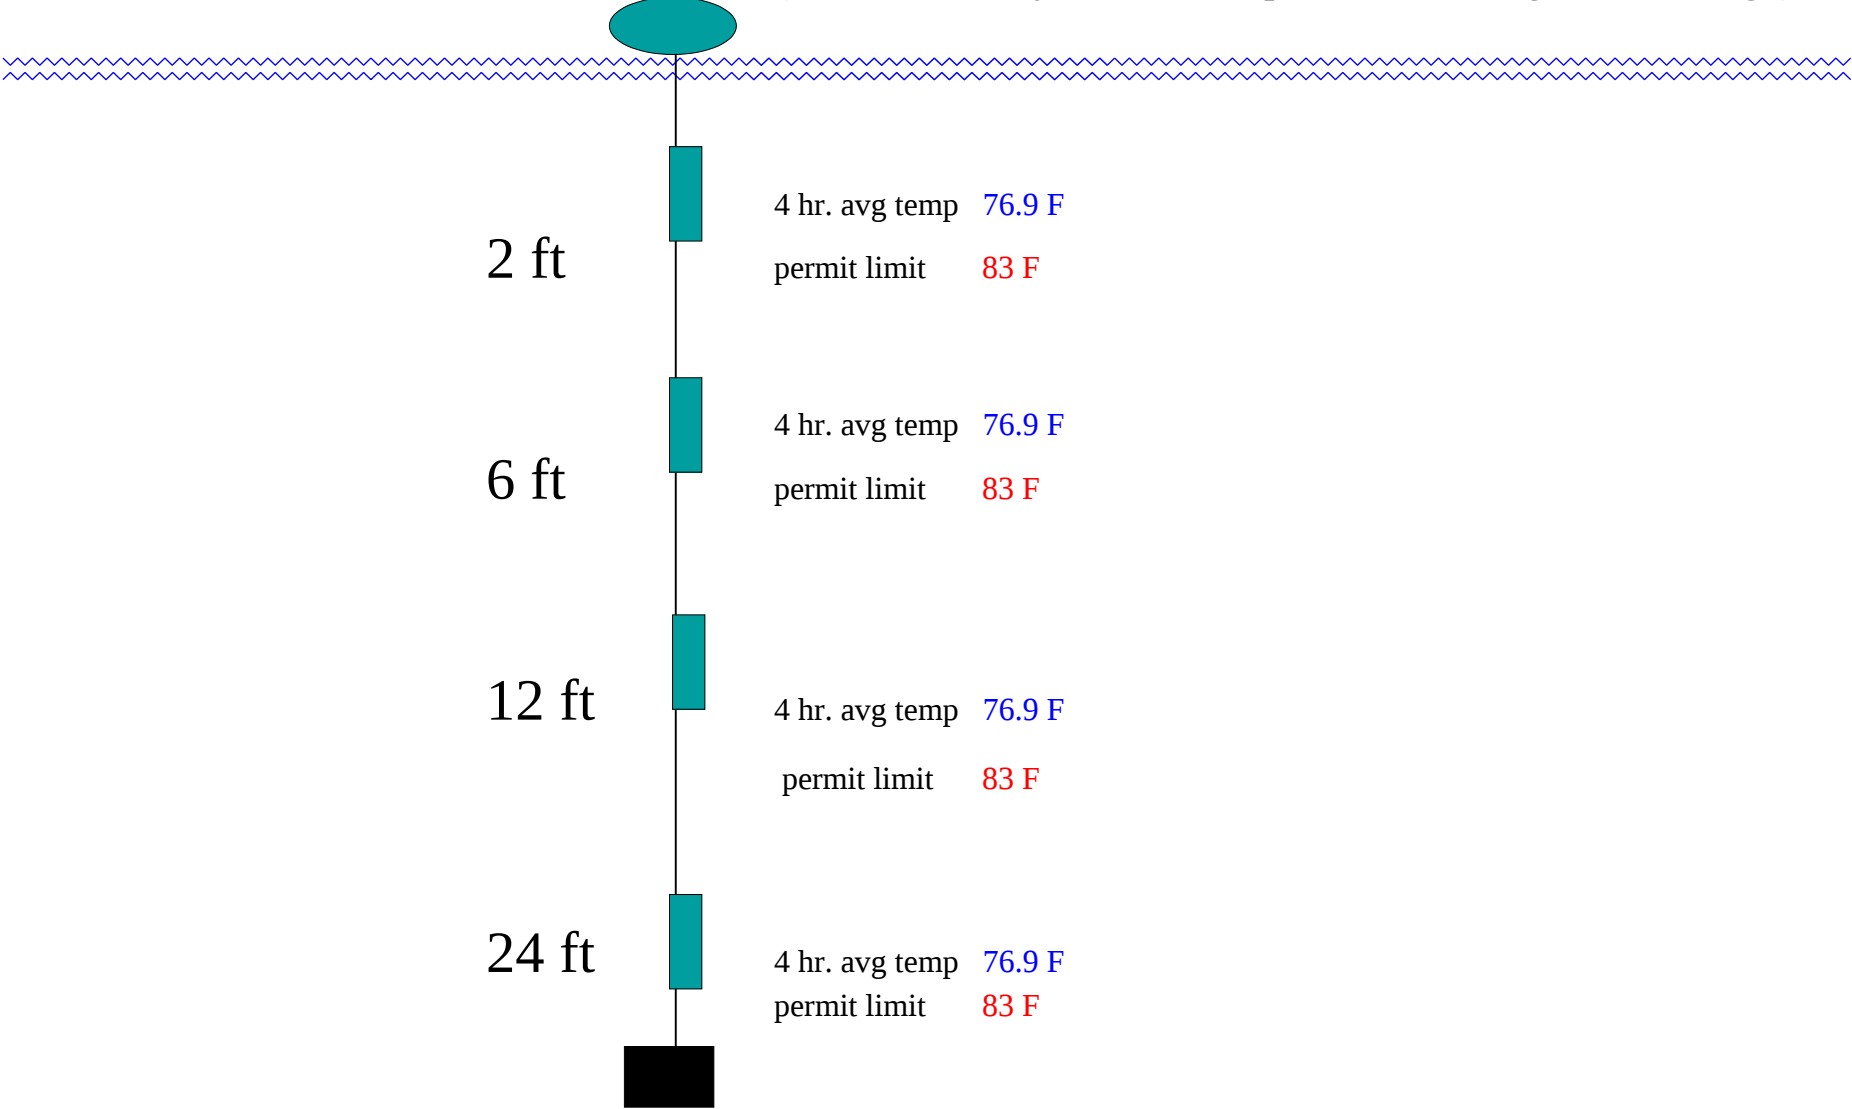

Limits Met At All Points of Station 2: YES Number of Exceedances in Past 7 Days: 0


Note: A similar information page must be created for each Monitoring Station for dissolved oxygen values, if real-time continuous DO readings are required.

Temperature Page

Time: 0915

Date: 7/15/04

Station 7 (Midpoint of Science Museum Lock)

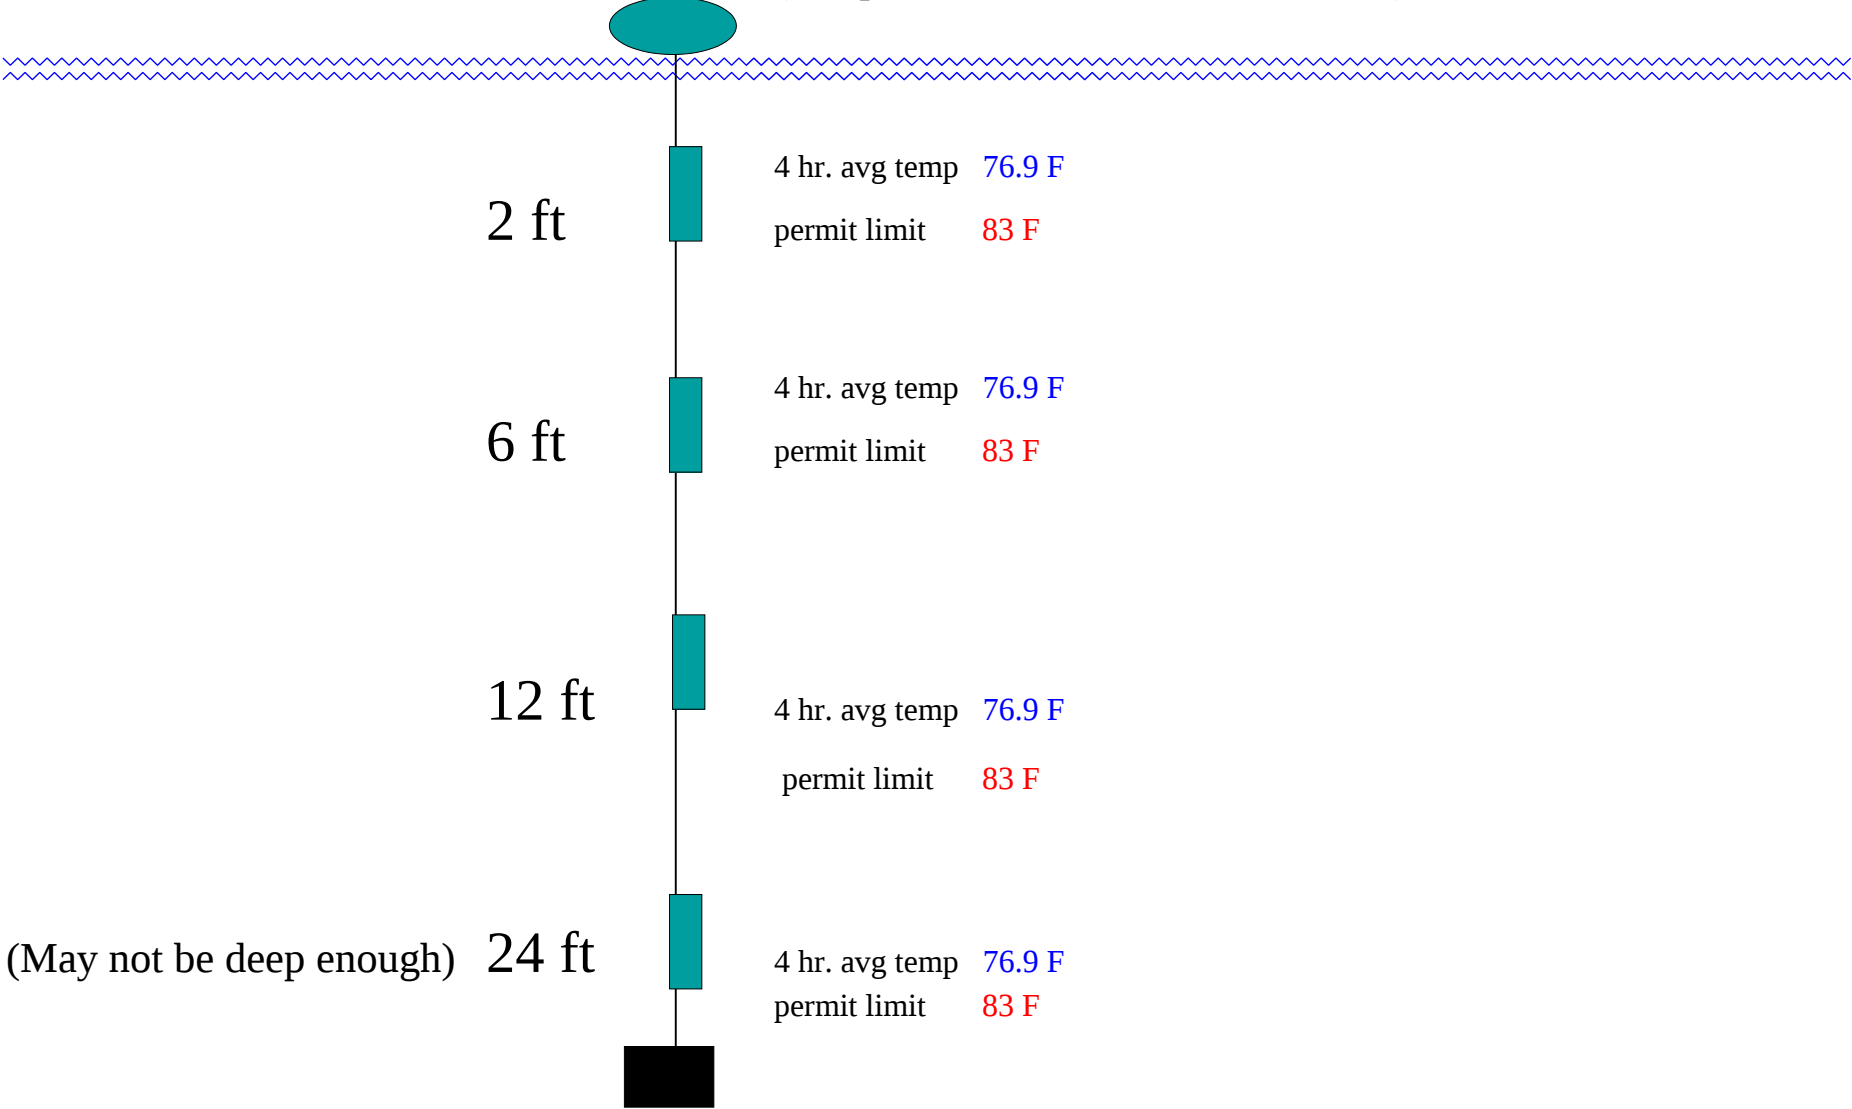

Limits Met At Two Contiguous Points of Station 7: YES Number of Exceedances in Past 7 Days: 0


Note: A similar information page must be created for each Monitoring Station for dissolved oxygen values, if real-time continuous DO readings are required.

Temperature Page

Time: 0915

Date: 7/15/04

Station 8 (Charles River, Upstream of New Charles River Lock and Dam)

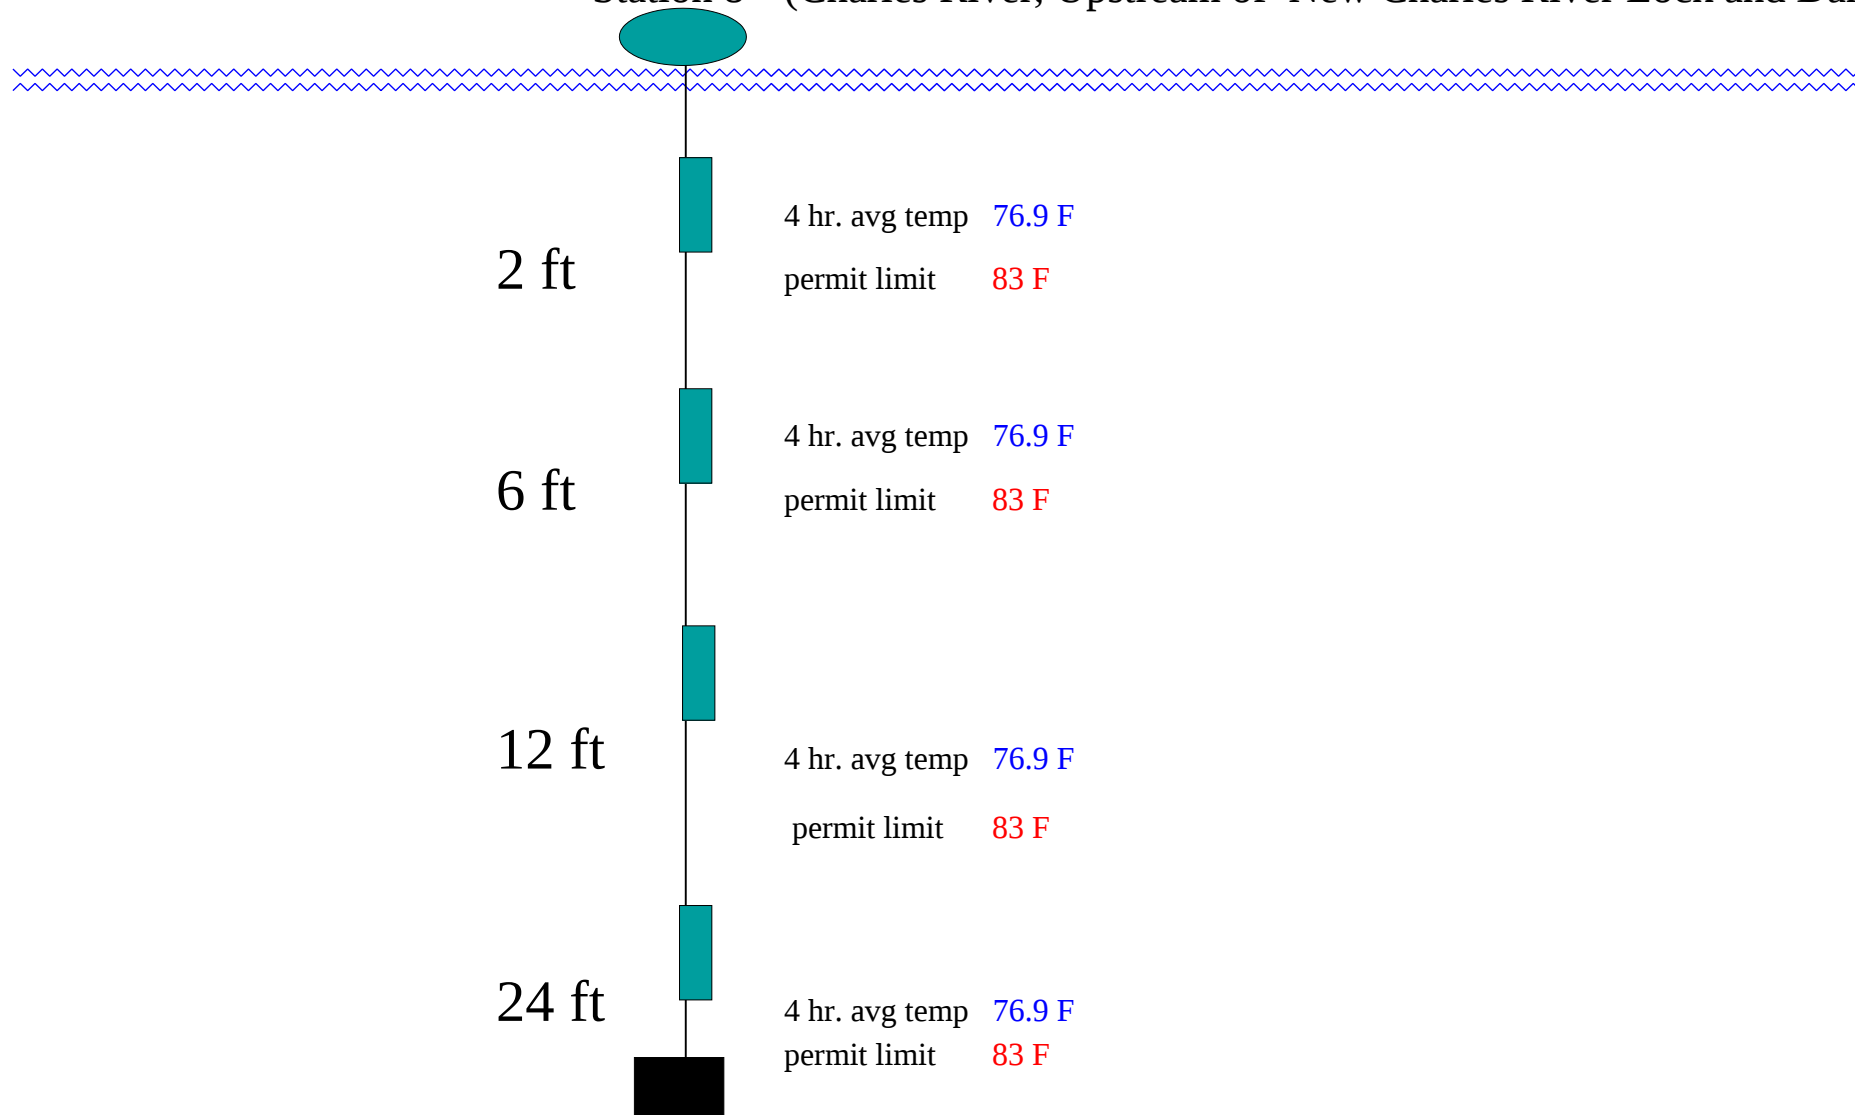

Limits Met At All Points of Station 8: YES Number of Exceedances in Past 7 Days: 0


Note: A similar information page must be created for each Monitoring Station for dissolved oxygen values, if real-time continuous DO readings are required.

Temperature Page

Time: 0915

Date: 7/15/04

Station 9 (Boston Harbor, Near New Charles River Lock and Dam)

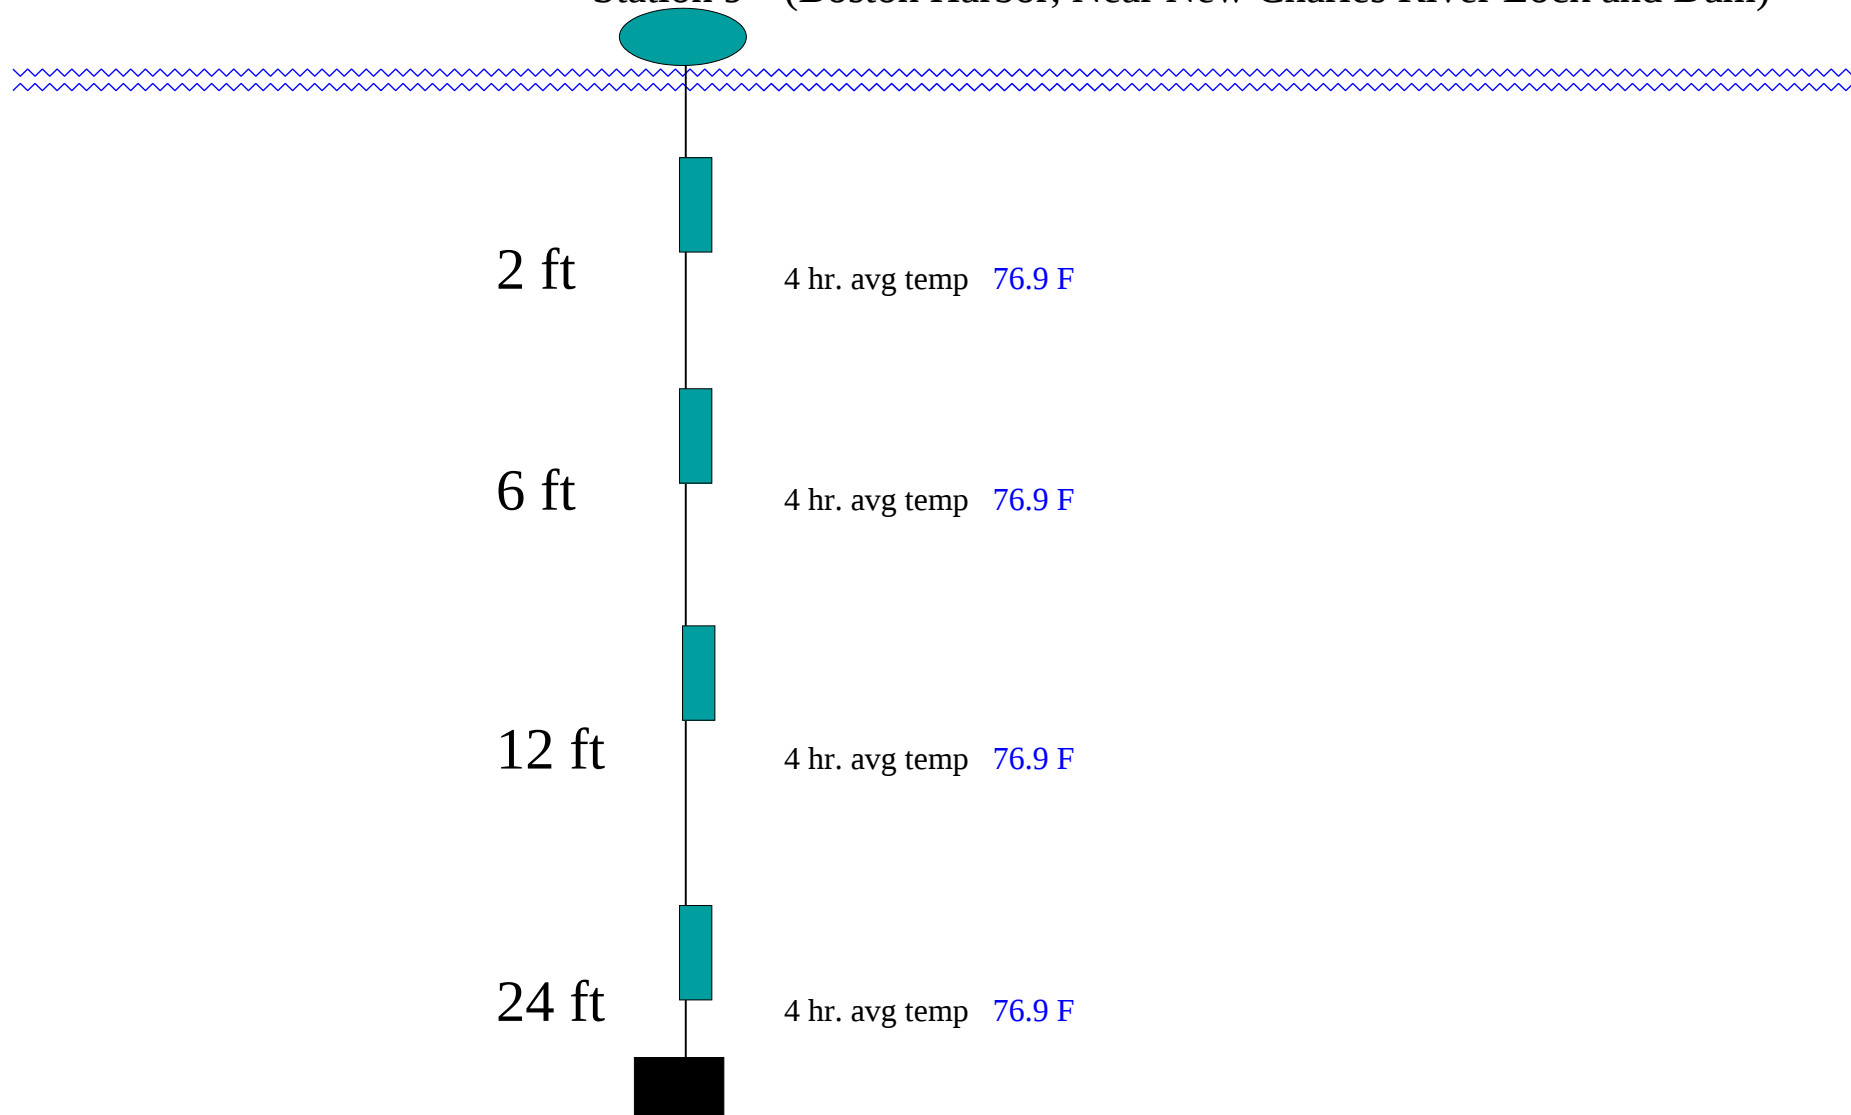

Monitor and Report Only

No Limits In Effect For Station 9


Note: A similar information page must be created for each Monitoring Station for dissolved oxygen values, if real-time continuous DO readings are required.

Temperature Page

Time: 0915

Date: 7/15/04

Station 1 (Background, Just Below BU Bridge)

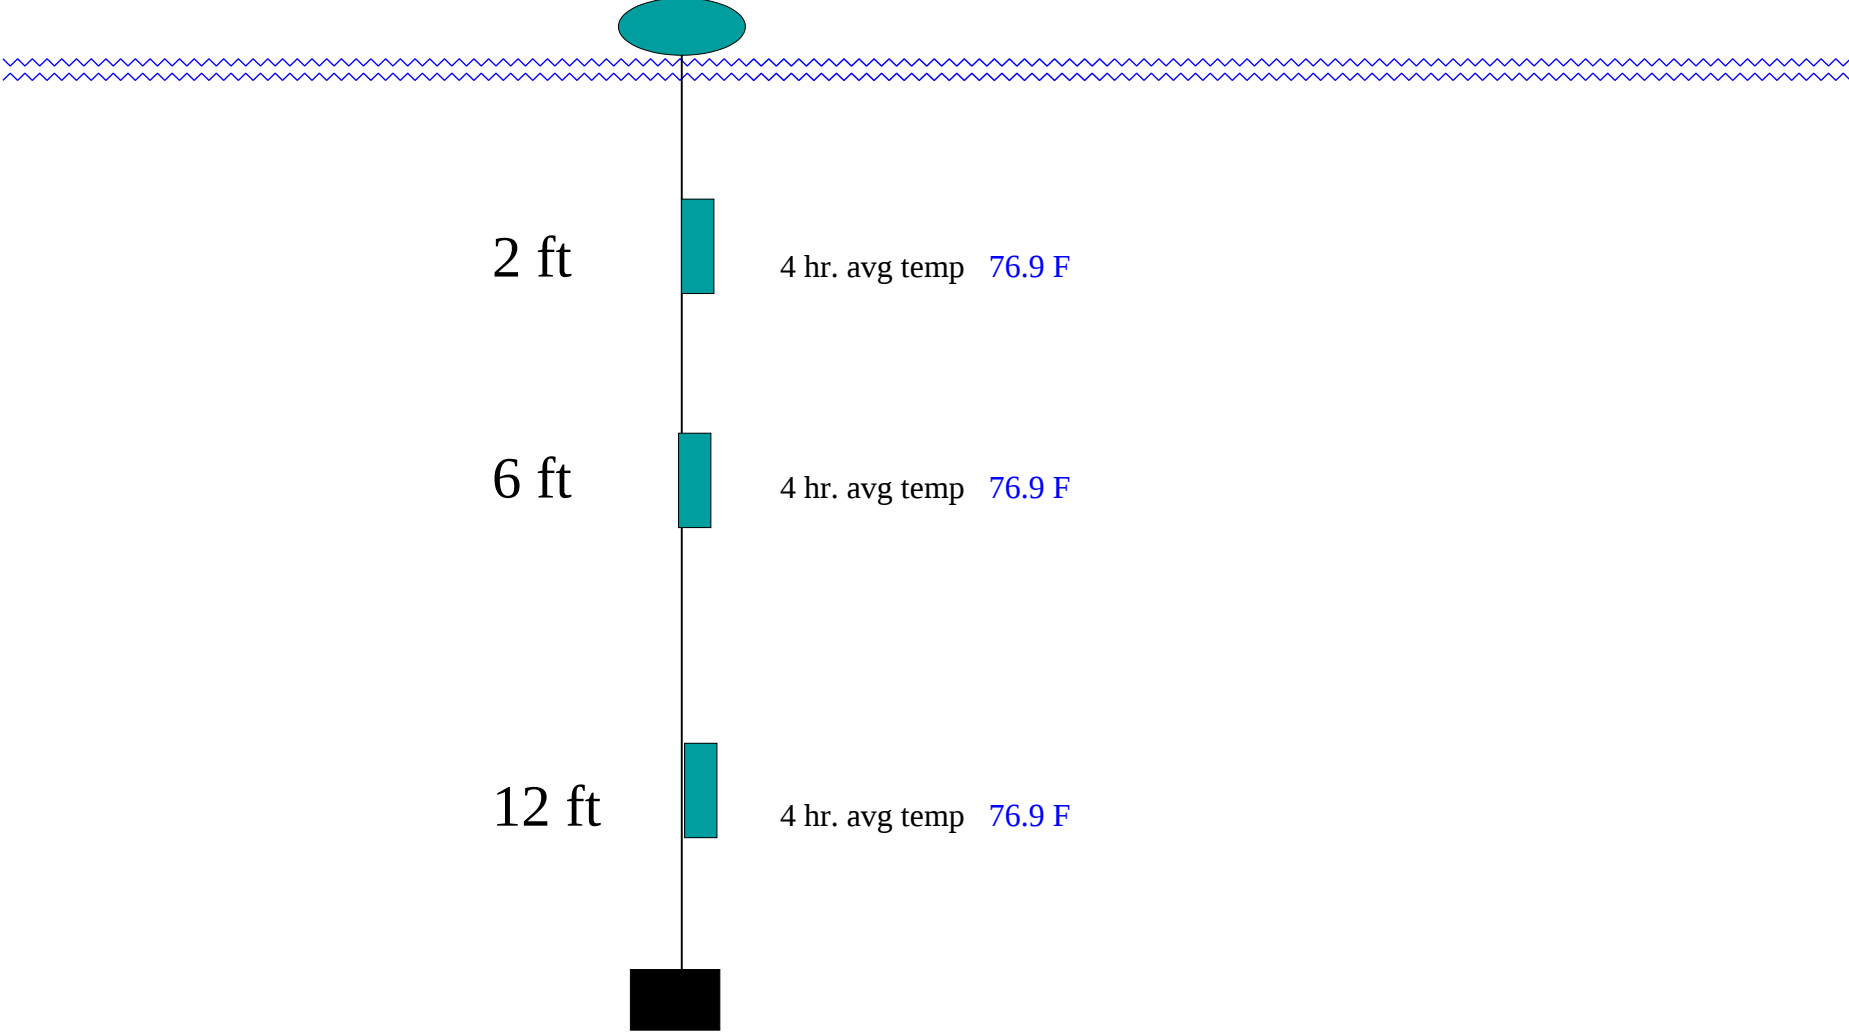


Used To Determine Ambient River Conditions Only

No Limits In Effect For Station 1


Note: A similar information page must be created for each Monitoring Station for dissolved oxygen values, if real-time continuous DO readings are required.

An example of hourly temperature values updated in real-time from all Monitoring Stations and all Monitoring Points, displayed continuously and in real-time on a web page that can be accessed by Regulators. In this example, Station 3 is identified on June 14, 2004. Each Station will display a similar graph. Degrees Fahrenheit scale shall be similar for all stations where possible, and also be the same range where possible. NOTE: Meteorological parameters listed in the permit must also be displayed in a similar format.

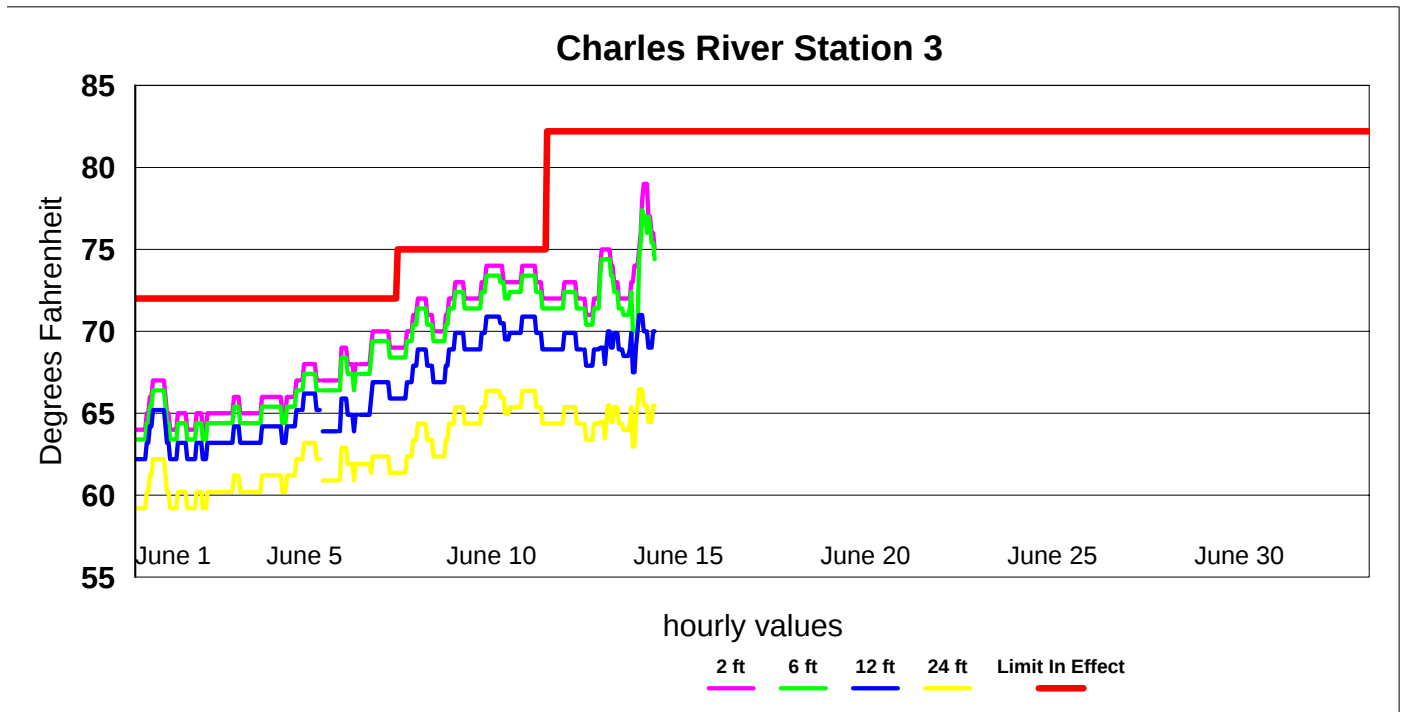


An example of hourly temperature values updated in real-time from Kendall Station Intake and Discharge displayed continuously and in real-time on a web page that can be accessed by Regulators.

NOTE: Meteorological parameters listed in the permit must also be displayed in a similar format.

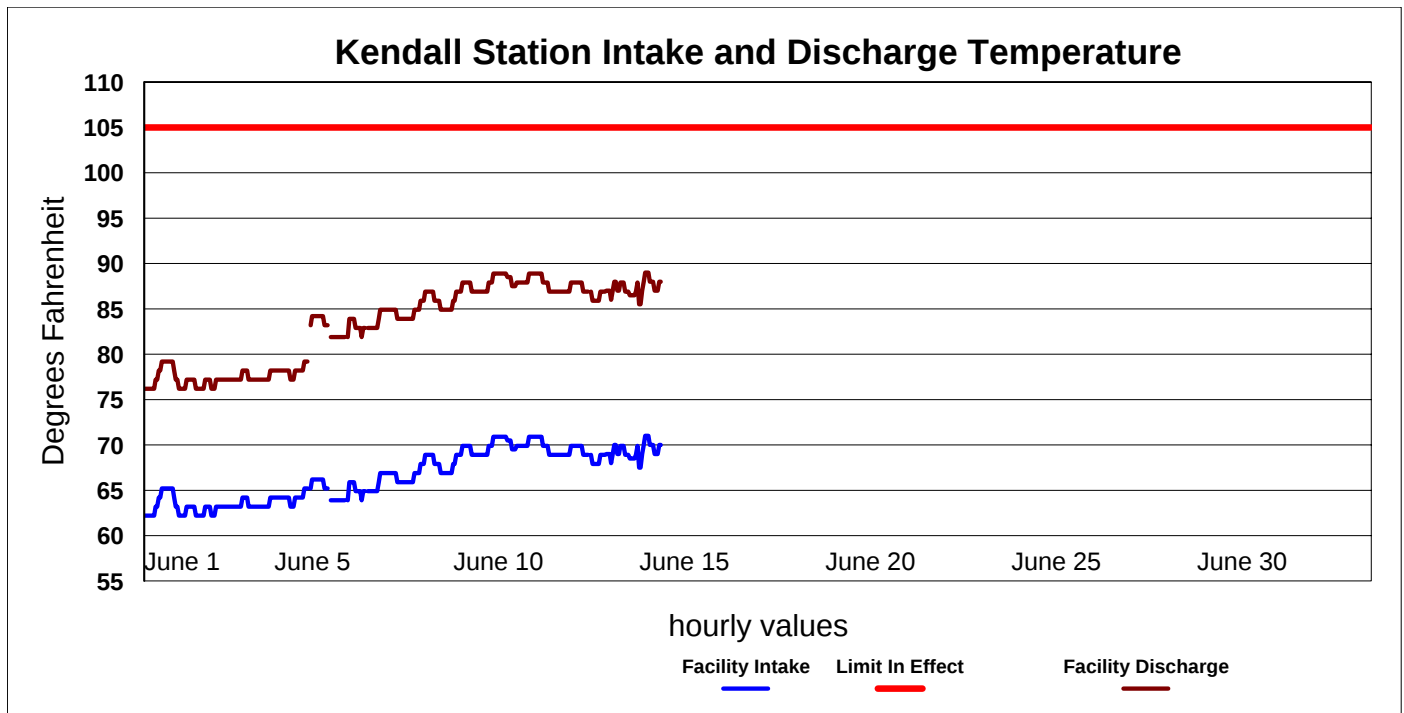


An example of hourly temperature values updated in real-time depicting the rise in temperature at Kendall Station displayed continuously and in real-time on a web page that can be accessed by Regulators.

NOTE: Meteorological parameters listed in the permit must also be displayed in a similar format.

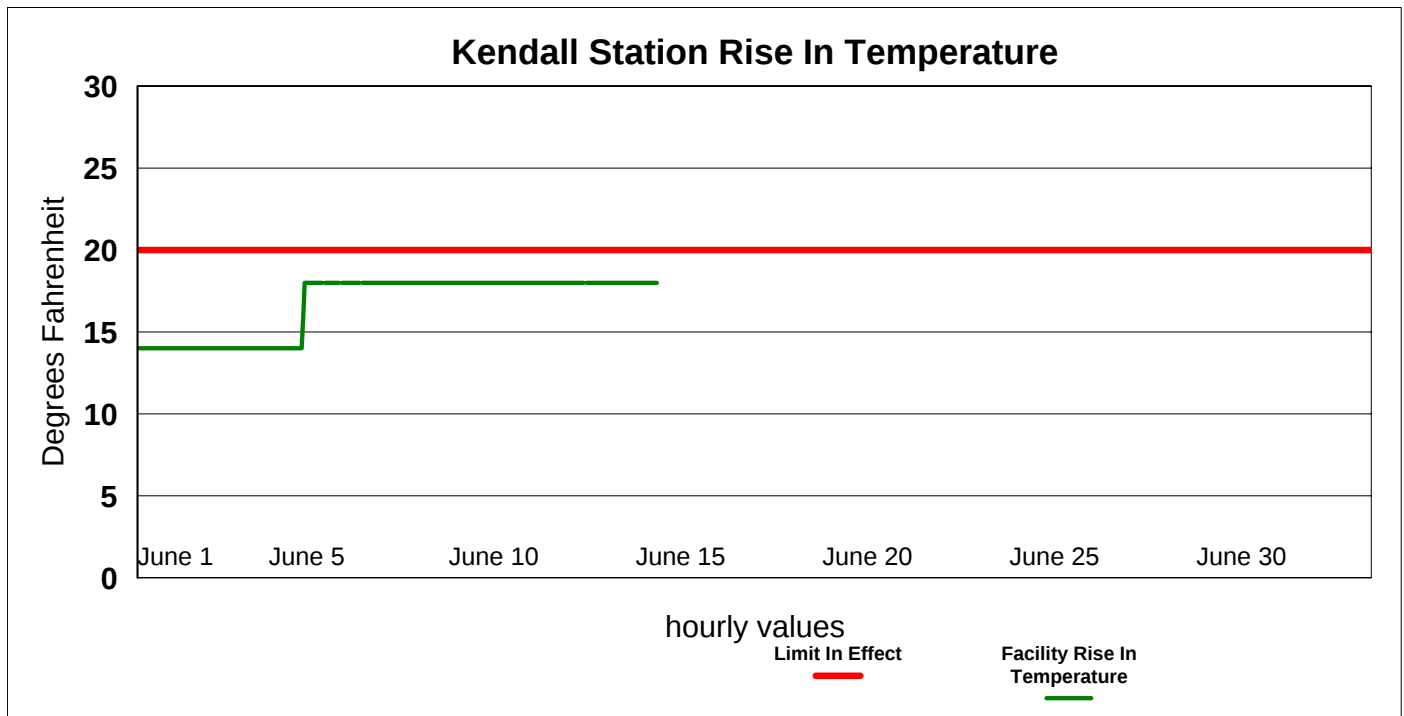


An example of hourly water use values updated in real-time depicting the circulating water flow at Kendall Station displayed continuously and in real-time on a web page that can be accessed by Regulators.

NOTE: Meteorological parameters listed in the permit must also be displayed in a similar format.

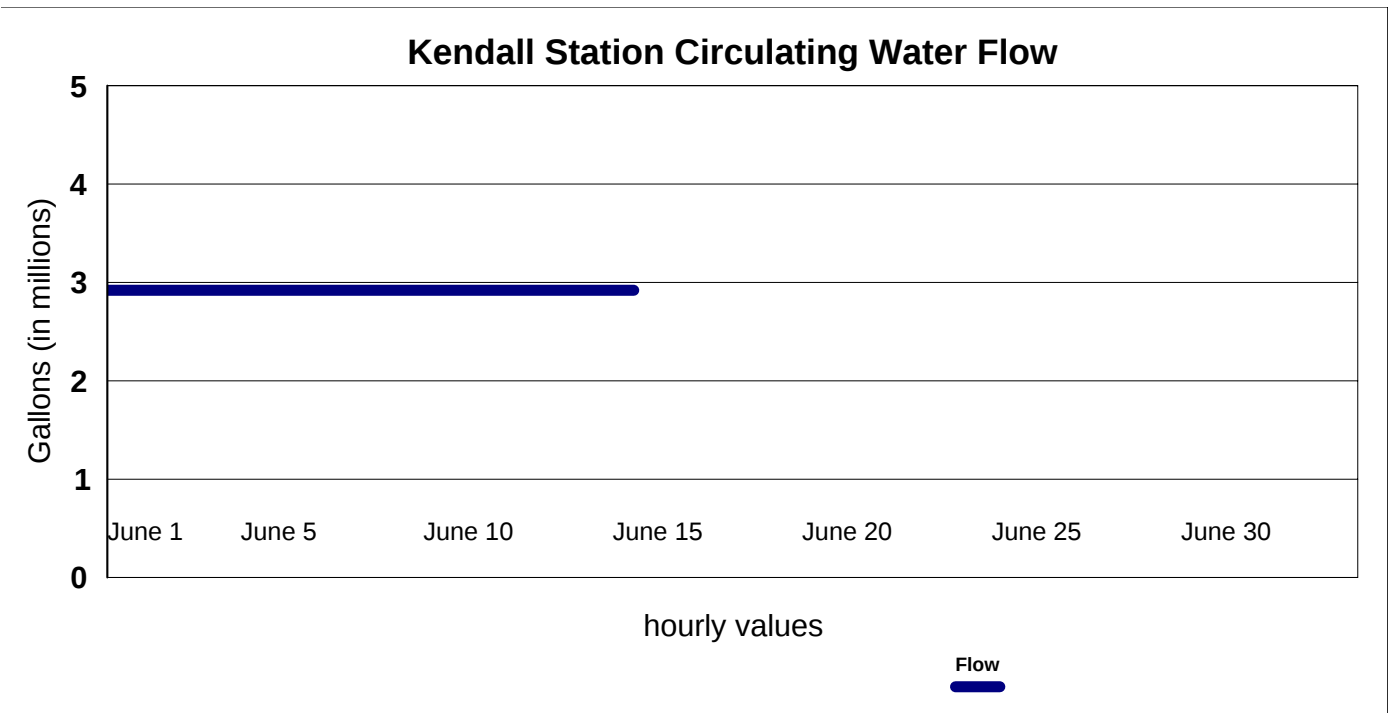

An example of hourly heat load values updated in real-time depicting the heat load at Kendall Station displayed continuously and in real-time on a web page that can be accessed by Regulators.

NOTE: Meteorological parameters listed in the permit must also be displayed in a similar format.

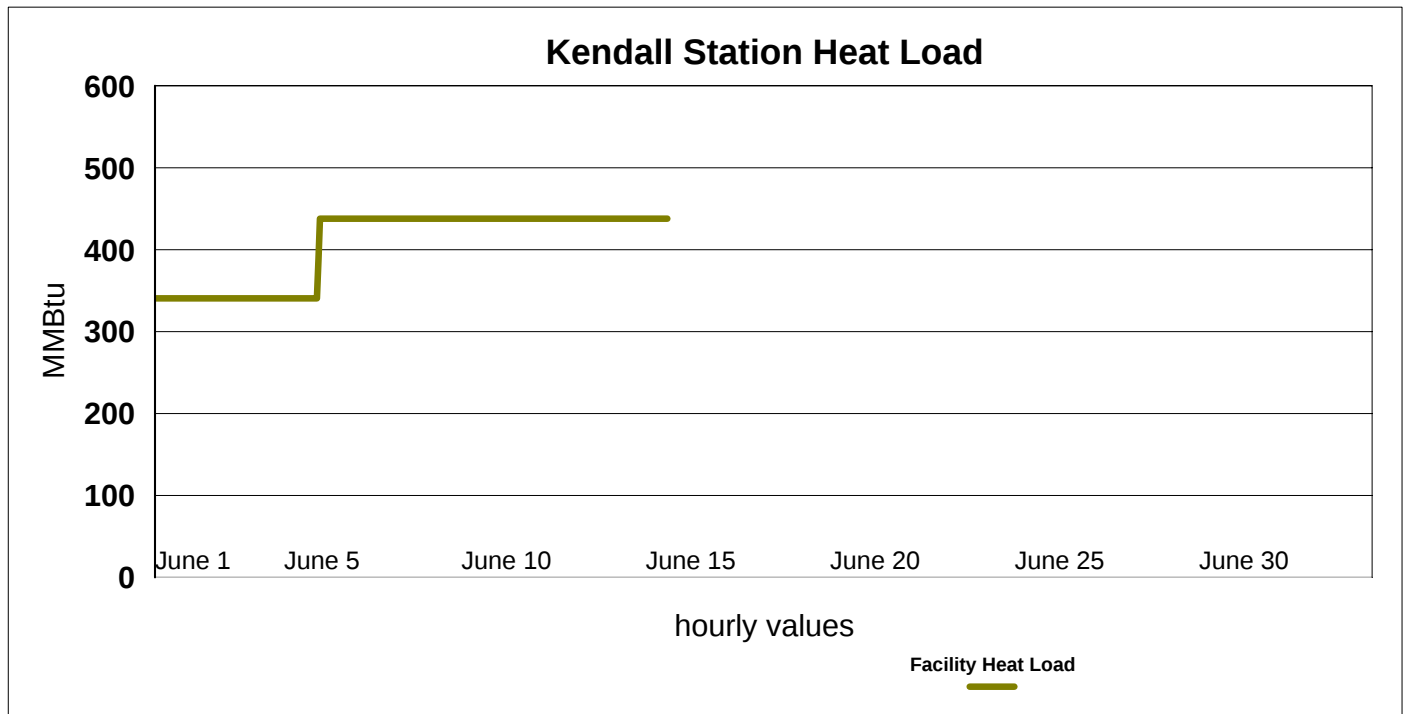


Maximum Temperature Limit Violation In The Zone Of Passage and Habitat

[illegible]

Kendall Station Supplemental Monthly Report Form B
Delta T Limit Violation In The Zone Of Passage and Habitat

[illegible]

ATTACHMENT H

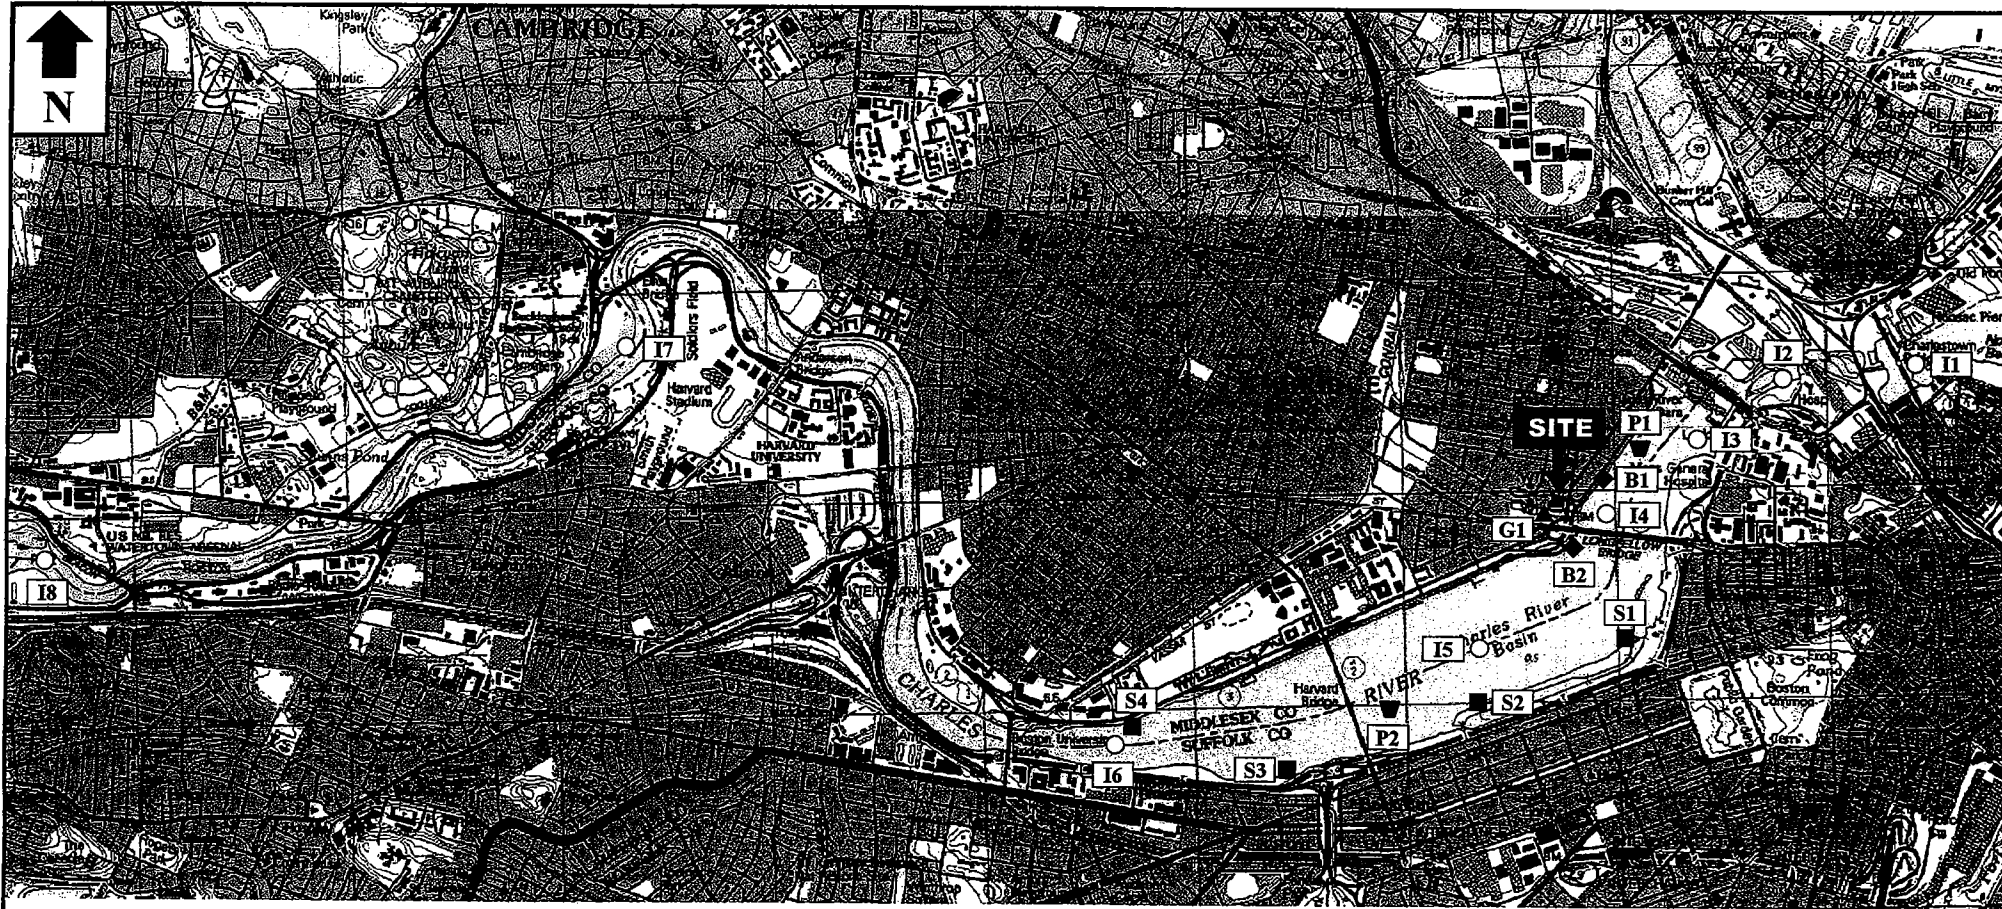

BASE MAP IS A PORTION OF THE FOLLOWING 7.5' x 15' USGS TOPOGRAPHIC QUADRANGLES: BOSTON NORTH, MA 1987, BOSTON SOUTH, MA, 1985

LEGEND

○ ICHTHYOPLANKTON STATION

- | | |
|----------------|-------------------|
| 11 Below Locks | 15 MIT |
| 12 Museum | 16 Hyatt |
| 13 Old Channel | 17 Soldiers Field |
| 14 River | 18 Marina |

■ BEACH SEINE SITE

- | |
|------------|
| S1 Fielder |
| S2 Lagoon |
| S3 Storrow |
| S4 Hyatt |

◆ BENTHIC TRANSECT

- | |
|----------------------|
| B1 Diffuser |
| B2 Longfellow Bridge |

P1 Seine Area

P2 Harvard Bridge

▲ GILLNET SAMPLE STATION

- | |
|-------------------|
| G1 Intake Gillnet |
|-------------------|

0 1000 2000

scale in feet

KENDALL SQUARE STATION
EQUIPMENT UPGRADE PROJECT

KENDALL BIOLOGICAL
MONITORING LOCATIONS
KENDALL SQUARE STATION
CAMBRIDGE, MASSACHUSETTS

Attachment I - Water Quality and Biological Monitoring Requirements *

Monitoring Activity	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	Permit Section
Water quality (WQ) continuous	C	C	C	C	C	C	C	C	C	C	C	C	14.b
WQ - parameter gradients	M	M	M	M	M	M	M	M	M	M	M	M	14.b
WQ - nutrients	M			M		W	W	W	W		M		14.d.2
WQ - chlorophyl a					C	C	C	C	C				14.c
WQ - continuous plant data	C	C	C	C	C	C	C	C	C	C	C	C	14.b.9
Meteorological Data	C	C	C	C	C	C	C	C	C	C	C	C	14.b.10
Phytoplankton - sample collection						W	W	W	W	W			14.e.10
Ichthyoplankton - river samples			W	W	W	W	W	W					14..e.4
Ichthyoplankton - barrier study					V	V	V						14.e.7
Ichthyoplankton - entrainment			W	W	W	W	W	W					14.e.8
Fish - beach seine collection							W	W	W	W	W		14.e.1
Fish - gill/fyke net collection			W	W	W	W	W	W	W	W	W		14.e.2
Fish - plant impingement			W	W	W	W	W	W	W	W			14.e.9
Fish - anadromous fish counts				3W	3W	3W							14.e.5
Fish - fish tagging/movement				C	C	C							14.e.6
Fish - collection ????													

* For summary purposes only C = continuous; W = weekly; 3W = three times per week; M = monthly; V = variable

