



**United States Steel Corporation  
Midwest Plant  
Portage, Indiana**

**Enhanced Wastewater Process Monitoring Design**

**06-29-2018  
Revised 12/21/2018**

## Contents

I.	Introduction.....	1
II.	April 11, 2017 Spill.....	1
II.A.	Chrome containment trench refurbishment.....	1
II.B.	Install flow meters on chrome wastewater piping.....	2
II.C.	Install conductivity meter in chrome trench sump.....	2
II.D.	Develop procedure for operator testing of chrome trench sump.....	2
II.E.	Install high level alarm float in chrome trench sump.....	2
II.F.	Manual testing of Final Treatment Plant discharge.....	3
II.G.	Trial and Install Inline Hexavalent Chrome monitoring.....	3
II.H.	Install inline spare conductivity meter in chrome basement sump.....	4
II.I.	Chrome Evaporator High Level Alarm.....	4
III.	Unauthorized discharges.....	4
III.A.	Eliminate Tin Line delivery looper pit drain to Final Treatment.....	4
III.B.	Refurbish containment around chrome heat exchangers and coat with epoxy.....	4
III.C.	Replace centrifugal chrome pumps in the chrome line basement with sealed mag-drive design.....	5
III.D.	Refurbishing and coating of chrome basement trench.....	5
III.E.	Purchase new laboratory equipment for hexavalent chromium testing.....	5
III.F.	Manhole in Tin Annex.....	5
III.G.	Install inline spare conductivity meter in Tin Line basement sump.....	5
IV.	Discharge in exceedance of Permit Limits.....	5
IV.A.	Install additional inline turbidity meters on chrome plant lamellas.....	5
IV.B.	Install additional access platforms to aid in chrome plant lamella inspection and cleaning.....	6
IV.C.	Replace single wall spiral heat exchangers with double wall plate and frame heat exchangers.....	6
IV.D.	Daily testing of Chrome Line heat exchangers for leaks.....	6
IV.E.	Investigate and trial online hexavalent chromium monitoring for chrome heat exchangers.....	6
IV.F.	Investigate Electronic Alert and Alarm System Integration at Final Treatment.....	7

## Appendices

Appendix 1 – Facility Drawings

Appendix 2 – Enhanced Monitoring Assessment Summary

Appendix 3 – Photo Documentation of Repairs



## **I. Introduction**

This Enhanced Wastewater Process Monitoring Design plan satisfies the requirements of the Evaluation (11.a) and Design (11.b) of the Enhanced Wastewater Process Monitoring System section of the 2018 Midwest Consent Decree dated April 2, 2018.

U. S. Steel evaluated the Midwest Plant Facility (Midwest) as per Part 11.a of the Midwest Consent Decree which states:

*By no later than March 30, 2018, U. S. Steel shall complete an evaluation of the existing wastewater process monitoring at its Midwest Plant Facility. The evaluation shall include an investigation of enhanced monitoring technologies and equipment for early detection of conditions that may lead to spills such as the April 11, 2017 Spill, and conditions that may lead to unauthorized discharges or discharges in exceedance of Permit limits, at the wastewater treatment works.*

U. S. Steel then developed a Design based on the results of the evaluation and pursuant to Part 11.b of the Midwest Consent Decree which states:

*By no later than three (3) months after completing the evaluation specified in subparagraph a. above, U. S. Steel shall submit to EPA and IDEM for review and approval, in accordance with Section VII (Review and Approval of Submittals), a design for enhanced wastewater process monitoring for early detection of conditions that may lead to spills such as the April 1, 2017 Spill, and conditions that may lead to unauthorized discharges or discharges in exceedance of Permit limits, at the wastewater treatment works.*

This document summarizes the evaluation and design of the Enhanced Wastewater Process Monitoring System for Midwest. The facility was evaluated with regards to the April 11, 2017 spill, unauthorized discharges, and the potential of discharges to exceed permit limits. The options outlined and implemented in the design plan are designed to avoid another occurrence such as the April 2017 Spill. The design was developed from documented technologies and equipment, but may change based on actual performance of equipment once installed.

## **II. April 11, 2017 Spill**

The April 11, 2017 spill was investigated and evaluated to determine root cause and preventative actions to reduce the possibility of a similar incident happening in the future. The following corrective actions were identified and are included in the Enhanced Wastewater Process Monitoring System design:

### *II.A. Chrome containment trench refurbishment*

To address the integrity of the containment trench for the chrome process wastewater piping, the trench was cleaned, and new concrete bottom poured. The trench slope was reestablished to direct any flow in the trench to the chrome trench sump. Please see Figure 1 and Figure 2 in Appendix 1 for the location of the trench.

A protective epoxy coating was installed over all of the concrete in the trench. A total of three layers were installed. The inner-most primer layer is for proper bonding, then a coating of a chemical resistance epoxy applied in 2 layers to establish a thickness for better service wear. The epoxy coating is chemically compatible with the process water and will prevent deterioration of the concrete.

II.B. Install flow meters on chrome wastewater piping

Two flow meters were installed at the inlet and outlet areas of the chrome plant influent wastewater piping. The pipe entry flow meter is located just after the combining of chrome wastewater flows from the Tin and Chrome Lines basement sumps and the pipe delivery flow meter is located just prior to discharge into the chrome plant equalization tank. Both installation locations were selected to minimize any hydraulic effects that may contribute towards accuracy errors. The pipeline is continuous and does not have any tie-ins along the length between the flow meters. Please see Figure 1 and Figure 2 in Appendix 1 for the location of the pipe entry and pipe delivery flow meters.

Rosemount flow meters are installed at the entry and exit of the chrome plant influent wastewater piping. Due to the line and pump configuration, the flow at each meter location varies, but the meters trend together. These meters would detect a line failure. Other methods are employed to detect leaks including conductivity metering in key locations, periodic sampling and inspection.

II.C. Install conductivity meter in chrome trench sump

A conductivity probe will be installed in the chrome trench sump to identify potential process water leaks into the trench. A higher ionic concentration, and therefore conductivity, is expected in a process wastewater as opposed to a stormwater source. Currently, there is no visual method to differentiate between storm water and process water presence in the trench. Once installed, the probe will be tied to the plant alert/alarm system. An acceptable conductivity action level will be determined based on an ongoing analysis of the normal readings. The conductivity monitoring will be in addition to the operators' visual check of the sump.

II.D. Develop procedure for operator testing of chrome trench sump

The chrome plant operator will conduct a colorimeter benchtop test for hexavalent chromium on a sample from the chrome trench sump once per day. U. S. Steel will analyze the ongoing results to determine the concentration at which an operator will initiate investigative action. If needed, the operator will shut down the potentially contributing process lines to minimize the spike of hexavalent chromium concentration, and adjust the chemical feed and/or flow rate through the plant in order to maintain proper treatment.

II.E. Install high level alarm float in chrome trench sump

A new high-level alarm will be installed in the chrome trench sump and will be tied into the plant alert/alarm system. The operator will then take the appropriate action in response to an alarm, which may include the shutdown of any process lines if they are contributing to the high level. Maintenance will investigate the cause of the high volumetric level in the trench sump and initiate repairs.

II.F. Manual testing of Final Treatment Plant discharge

The final treatment plant operator will conduct hexavalent chromium tests using a benchtop colorimeter on the final treatment discharge once per day in addition to the third party NPDES testing. U. S. Steel will analyze the ongoing results to determine the concentration at which an operator will initiate investigative action. If needed, the operator will shut down the potentially contributing process lines.

II.G. Trial and Install Inline Hexavalent Chrome monitoring

U. S. Steel conducted a trial with an Aqua Metrology Systems MetalGuard™ automated online analyzer on the discharge of the Chrome Treatment Plant. The approximately two-month trial was performed to determine the ability of the inline meter to detect low levels of hexavalent chromium for an early warning of a possible concentration increase above the normal operating range. The results of the analyzer were inconsistent when compared to third-party analysis of a split sample. As part of the trial, U. S. Steel spiked the reservoir of the analyzer with a known concentration of hexavalent chromium to determine if the instrument would be more accurate above the operating range. The results were inconsistent in this higher concentration range as well. In addition to the concentration inaccuracy, the small sample ports would become plugged with trace amounts of solids and would take the unit offline until cleaned. U. S. Steel determined from the inconsistent results and unreliable operation that the MetalGuard™ analyzer is not appropriate for installation at the Chrome Treatment Plant.

U. S. Steel then contacted ASA Analytics (ASA) to begin a trial of a ChemScan® mini process analyzer (ChemScan). The trial began with bench scale testing in the ASA laboratory using samples from the Midwest Plant Chrome Treatment Plant discharge, Final Treatment discharge, and non-contact cooling water from the Chemtreat and Plater section heat exchangers of the Chrome Process Line. The ChemScan unit's larger sample ports did not experience plugging, and the concentration in the samples other than the Chrome Plant discharge well-matched third party analytical concentration tests. The Chrome Plant may be experiencing interferences that continue to be investigated.

U. S. Steel has obtained a ChemScan unit for onsite trialing. The unit may be placed in the following locations, pending successful trial:

1. Final Treatment Plant (Internal Outfall 104)

The discharge of the Final Treatment Plant will undergo a trial of the ChemScan unit to determine the accuracy in measuring hexavalent chromium presence. The Chemscan unit will be placed at the discharge rather than an upstream location to minimize interferences and perform the measurement on the less contaminated wastewater. The trial will determine the optimal location for the unit.

2. Chrome Treatment Plant (Internal Outfall 204)

Upon a successful trial at the Final Treatment Plant, a ChemScan unit will be trialed at the discharge of the Chrome Treatment Plant to determine the optimal location for the sample to be withdrawn.

3. Outfall 004

A Chemsan unit is not planned for trial at Outfall 004. The upstream monitoring will be able to detect hexavalent chromium at a lower level, and provide a more accurate indication as to the area of the source.

II.H. Install inline spare conductivity meter in chrome basement sump

An inline spare probe will be installed near the sump pumps to provide additional monitoring. The two conductivity probes will be tied to the plant alert/alarm system. Both probes are installed to alarm in the event a process water release is detected. A high concentration will automatically initiate a shutdown of the sump pumps. The appropriate alarm levels will be determined from concentrations above the normal process discharge range.

II.I. Chrome Evaporator High Level Alarm

An evaporator for the chrome line will have two new guided wave level sensors installed to replace the current level pressure sensor. Solids buildup on the current level pressure sensor could cause improper level detection and potentially prevent the drain valve from opening and overflow the evaporator to subsequent tanks and on to the chrome basement sump. The new high-level sensors will detect if the volume of process water in the evaporator approaches an overflow condition. The following will automatically occur in response to an alarm:

1. Open the level-control return valve to discharge the solution back to the evaporator feed tank
2. Break the vacuum of suction drawing solution through the evaporator
3. Shut down the feed pumps at the inlet to the evaporator
4. Alert Operations to the problem

**III. Unauthorized discharges**

The Midwest facility was assessed as to potential risks associated with unauthorized discharges. The following action items were identified and are included in the Enhanced Wastewater Process Monitoring System:

III.A. Eliminate Tin Line delivery looper pit drain to Final Treatment

A drain was identified in the delivery looper pit of the Tin Line that discharged to the Final Treatment Plant. Rerouting this drain will ensure that all material collected in the looper pit will be pumped to the chrome treatment plant. Please see Figure 1 and Figure 2 in Appendix 1 for the location of the modified piping from the looper pit.

III.B. Refurbish containment around chrome heat exchangers and coat with epoxy

The containment around the Plater and ChemTreat heat exchangers will be refurbished to prevent any unplanned release from migrating from the area. Please see Figure 1 and Figure 2 in Appendix 1 for the location of these heat exchangers.

III.C. Replace centrifugal chrome pumps in the chrome line basement with sealed mag-drive design

The seals/packing glands on centrifugal pumps are prone to wear and potential process water leaks. The sealed mag-drive design eliminates the seal leaks.

III.D. Refurbishing and coating of chrome basement trench

Refurbishing the chrome basement trench will ensure containment is secure and will prevent possible releases to the environment. The integrity of the basement trench will be restored with new concrete and epoxy in areas where needed.

III.E. Purchase new laboratory equipment for hexavalent chromium testing

A new photo spectrometer will provide the process control sampling capability for the Midwest Laboratory to analyze wastewater samples for hexavalent chromium reliable down to the detection needed to identify potential problems. This instrument will be in addition to the ICP and IC units that are currently in use at the Midwest Laboratory.

III.F. Manhole in Tin Annex

The Tin Annex contains an offline pickle cleaning solution (sulfuric acid) and a neat hydrochloric acid tank. Concrete around the top of manhole DIW 19 that discharges to the DIW process sewer has eroded and could allow migration of these acids to the Final Treatment Plant. This manhole in the Tin Annex will be permanently sealed. This will allow any tank leak to be fully contained. A vacuum truck will remove any accumulated material. Please see Figure 1 and Figure 2 in Appendix 1 for the location of manhole DIW 19.

III.G. Install inline spare conductivity meter in Tin Line basement sump

An inline spare probe will be installed near the sump pumps to provide additional monitoring. The two conductivity probes will be tied to the plant alert/alarm system. The probes will be installed to alarm in the event a process water release is detected. A high concentration will automatically initiate a shutdown of the sump pumps. The appropriate alarm levels will be determined from concentrations above the normal process discharge range. Please see Figure 1 and Figure 2 in Appendix 1 for the location of the Tin Line basement sump.

**IV. Discharge in exceedance of Permit Limits**

The Midwest facility wastewater treatment facilities were assessed as to the potential of discharges to exceed NPDES permit limits. The following actions items were identified and are included in the Enhanced Wastewater Process Monitoring System:

IV.A. Install additional inline turbidity meters on chrome plant lamellas

The lamella plates in the Chrome Plant remove chrome bearing solids from the treatment stream. There are three discharge channels from the separation plates of the lamellas. There was a turbidity probe in only one of the three discharge channels of each train. This prevented detection of solids discharging from the other two channels. Additional inline turbidity meters



were recently installed in the other two channels of each train to measure the solids carryover across all three channels. Each of the six turbidimeters are tied into the plant alert/alarm system and can initiate an alarm independently.

IV.B. Install additional access platforms to aid in chrome plant lamella inspection and cleaning

The original access points to clean and inspect the lamella plates did not provide a safe access the entire width of the equipment. By adding additional access platforms at the effluent troughs, the operator can now safely perform maintenance and cleaning activities.

IV.C. Replace single wall spiral heat exchangers with double wall plate and frame heat exchangers

A single wall plate and frame heat exchanger on the Chrome Line Plater section, and two spiral heat exchangers on the Chrome Line ChemTreat section were replaced with double wall plate and frame heat exchangers. The double wall heat exchangers significantly reduce the likelihood of process water leaking into the non-contact cooling water.

IV.D. Daily testing of Chrome Line heat exchangers for leaks

Samples of non-contact cooling water from each chrome line heat exchanger will be taken and analyzed at Midwest's laboratory for hexavalent chromium once per day. U. S. Steel will determine an action level for reanalysis of a sample, increased sampling frequency as part of an investigation. If a potential leak is confirmed the operating heat exchanger will be removed from service and a backup unit placed in operation and tested.

IV.E. Investigate and trial online hexavalent chromium monitoring for chrome heat exchangers

Pending a successful trial at the Final Treatment plant discharge, examine the feasibility of installing inline hexavalent chromium monitoring on the discharge water lines of Chrome heat exchangers.

1. Chemtreat heat exchangers (or divert to chrome plant)

The Chemtreat section of the chrome line requires cooling across a double walled heat exchanger. The non-contact cooling water flow is fairly low, and could potentially be redirected to the Chrome Treatment Plant instead of the Final Treatment Plant. If not redirected, a trial will be conducted at this heat exchanger's discharge to determine if inline hexavalent chromium monitoring is appropriate.

2. Plater heat exchangers

The Plater section of the Chrome Line also requires cooling across a double walled heat exchanger as well. The higher flow rate of this cooling water cannot be redirected to the Chrome Plant. The ChemScan unit will be trialed and evaluated to determine if hexavalent chrome monitoring is appropriate.

*IV.F. Investigate Electronic Alert and Alarm System Integration at Final Treatment*

The Final Treatment Plant alerts and alarms are localized at the plant. Several treatment steps rely on operator knowledge and awareness to notice drifts outside of the normal process range. U. S. Steel will investigate methods for incorporating electronic outputs into the plant-wide alert system, and record trending data to assist in process control.

## **Appendices**

**Appendix 1**  
**Facility Drawings**



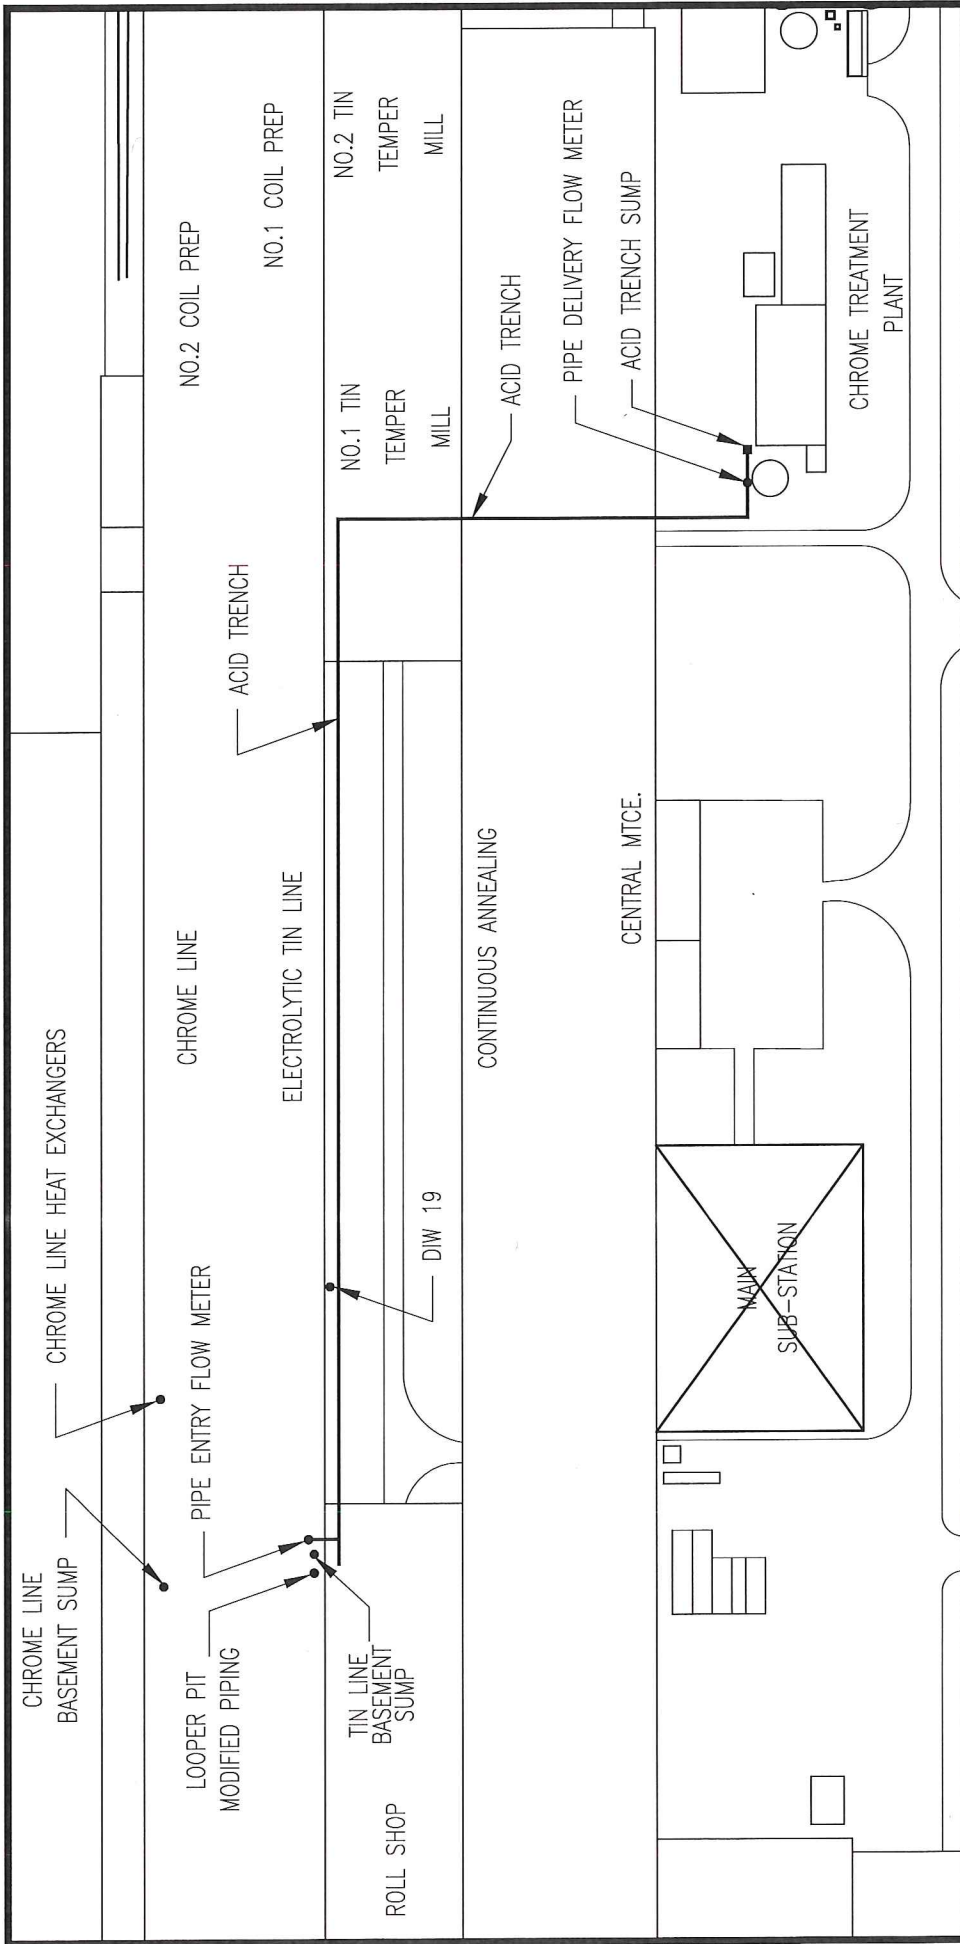


FIGURE #2

## **Appendix 2**

### **Enhanced Monitoring Assessment Summary**

**United States Steel Corporation - Midwest Plant  
Enhanced Monitoring Assessment Summary**

As required by Paragraph 11(a) of the March 2018 Consent Decree, U. S. Steel completed an evaluation the Midwest Plant Facility (Midwest). That investigation included a review of enhanced monitoring technologies and equipment for early detection of conditions that may lead to spills such as the April 11, 2017 Spill, and conditions that may lead to unauthorized discharges in exceedance of Permit limits, at Midwest's wastewater treatment works.

This table provides the summary for all improvements made and/or to be made at the Midwest Facility as a result of the Enhanced Monitoring Assessment. The evaluation was developed from documented technologies and equipment, but the design may change based off of actual performance of equipment once installed.

Investigation of Enhanced Monitoring Technologies and Equipment			Status of Action as of December 21, 2018	
Equipment Area	Issue	Correction/Investigation	Actions	
Chrome containment trench	Trench concrete floor integrity is deteriorated.	Clean trench and evaluate required repairs.	The trench was cleaned, reformed bottom with new concrete. Trench slope re-established to direct flow into the sump.	The trench was cleaned, and the bottom was reformed with new concrete. Trench slope re-established to direct flow into the sump.
Chrome containment trench	Trench concrete protective coating has failed.	Chemical resistant protective epoxy coating to be installed over bottom and sides of the trench.	Developing schedule subject to atmospheric conditions. Date of application weather dependent.	The protective epoxy coating was applied.
Chrome containment trench	Installation of flow meters on chrome transfer pipeline will allow for indication of a leak.	Install flow meters (1 inlet and 1 outlet) on chrome transfer pipeline.	Completed installation.	Evaluation of flow variances is ongoing.
Chrome containment trench sump	Small pipeline leaks may not be obvious by comparing flowmeter differences.	Install conductivity probe to help detect potential small leaks of chrome wastewater from pipeline.	Install probe. Connect output to plant alert/alarm system. Establish response procedures.	Probe was installed and output connected to plant alert/alarm system. Probe is currently operating, however not all high conductivity measurements are a result of chromium. High conductivity are checked by the operator bench tests for hex chromium.
Chrome containment trench sump	Confirm conductivity probe readings.	Chrome Plant Operator to test sump contents once per day.	Incorporate bench testing of sump contents for hexavalent chrome. Establish response procedures.	Operators conducting bench testing of sump for hex chromium at least once per day. Operator follows SOP NSCS-M-P-7093-02-11.
Chrome containment trench sump	Failure of sump pump could cause chrome containment trench overflow to ground.	Install high level float to trigger alarm.	Install float. Determine alarm response actions.	Float was installed. When a high level alarm is triggered, operator visually verifies high level condition and follows SOP NSCS-M-P-7093-02-11.
Chrome containment trench	Need to establish regular visual inspection of the integrity of the trench and pipeline running through the trench.	Develop inspection form. Schedule personnel to visually inspect the trench.	As additional monitoring steps are established continue to revise inspection functions and frequencies. Annually perform a detailed trench inspection and perform necessary repairs.	Conducting detailed trench inspection annually.
Final Treatment Plant Discharge	Monitor plant effluent for hexavalent chrome presence.	Have Final Treat Operator test for hexavalent chrome.	Initiate once daily testing for hexavalent chrome bench testing to be performed by the Final Treat Operator.	Bench testing is conducted daily.



**United States Steel Corporation – Midwest Plant  
Enhanced Monitoring Assessment Summary**

<i>Equipment Area</i>	<i>Issue</i>	<i>Correction/Investigation</i>	<i>Actions</i>	<i>Status of Action as of December 21, 2018</i>
Final Treatment Plant Discharge	Inability to detect hexavalent chromium outside of laboratory analysis.	Install online hexavalent chromium monitoring equipment. Bench testing Final Treat effluent water indicates successful hexavalent chromium detection.	Purchase ChemScan Unit(s), determine location for installation. Field trial unit to confirm proper operation. If field testing successful establish alarm levels and required response.	The first unit trialed was MetalGuard by Aqua Metrology Systems. This unit was unreliable and had multiple interferences. The second unit that is currently being trialed is the ChromScan unit. The trial results so far indicate that the unit is capable of detecting hex chrome down to approximately 10 ug/L. This is still too high to identify possible permit limit compliance issues. The next step is to compare results of the online meter with laboratory instrumentation on known 'spiked' samples to determine the accuracy of the online meter and possible interferences. It is expected that this trial will continue through January of 2019 before a determination could be made if this is a viable option or not.
Chrome Plant Discharge	Inability to detect/monitor for hexavalent chromium continuously.	Investigate installation of ChemScan Unit(s) with online hexavalent chromium monitoring capability.	Further investigate interference(s) in Chrome plant effluent using matrix spikes. If poor bench testing results can be resolved then install unit to monitor plant effluent. Determine alarm levels and required response.	Once the ChromScan unit at the Final Treatment Plant is operating properly and consistently, an additional unit will be installed inline at the Chrome Treatment Plant discharge and a trial at this location will begin.
Chrome Line Plater and Chemtreat Heat Exchangers	Testing frequency of non-contact cooling water from ChemTreat and Plater heat exchangers.	Heat exchanger non-contact cooling water is tested once a week for hexavalent chrome in onsite laboratory.	Increase frequency of onsite laboratory testing of non-contact cooling water from the ChemTreat and Plater heat exchangers to once a day.	Testing of heat exchangers is conducted daily.
Chrome Line Plater and Chemtreat Heat Exchangers	Inability to detect hexavalent chromium outside of laboratory analysis.	Consider installation of ChemScan Unit(s) with online hexavalent chromium monitoring of non-contact cooling water as an alternative to once a day onsite lab testing.	Research potential location and number of units for installation. If field testing is successful, tie into plant alert/alarm system. Determine alarm levels and train personnel to implement required response.	Once the ChromScan unit at the Final Treatment Plant is operating properly and consistently, an additional unit will be installed inline at the heat exchanger discharge and a trial at this location will begin.
Chrome Line Evaporators	Evaporator operating parameters are not monitored to shut down unit to prevent overflow to chrome wastewater system.	Install redundant level sensors that will detect high-high levels in the evaporator.	The level sensors will initiate commands for various shutdown steps.	Level sensors are installed.
Chrome Line Evaporators	Evaporator operating parameters are not monitored to shut down unit to prevent overflow.	When high-high level detected stop flow of solution to evaporator.	Install a relay to open the vacuum breaker valve which will prevent the vaporator from drawing solution into the vessel.	Installed the relay to open the vacuum breaker.
Chrome Line Evaporators	Evaporator operating parameters are not monitored to shut down unit to prevent overflow.	When high-high level detected stop flow of solution to evaporator.	Install an interlock to shut down pumps that feed solution to the evaporators.	Interlock was installed.
Chrome Line Evaporators	Evaporator operating parameters are not monitored to shut down unit to prevent overflow.	When high-high level detected empty the vessel.	Send a signal to the vessel solution level control valve to force it 100% open. This will allow the Return Pumps to pull solution out of the vessel and return it to the storage tank.	Signal to control valve established.
Final Treatment Plant	Local alarms are not relayed back to plant alert/alarm system.	Determine with Process Control Department what equipment may need to be installed to relay signals into the plant alert/alarm system.	Evaluate which monitoring points should be integrated into the system. Review hardware and software requirements to deliver signals.	Key parameters have been assigned acceptable process ranges and are incorporated into the following response procedure NSCS-M-P-7093-02-47

**United States Steel Corporation – Midwest Plant  
Enhanced Monitoring Assessment Summary**

<i>Equipment Area</i>	<i>Issue</i>	<i>Correction/Investigation</i>	<i>Actions</i>	<i>Status of Action as of December 21, 2018</i>
Final Treatment Plant Effluent	Are there other tests and equipment that would be beneficial to implement and install to add in treatment?	Review NPDES limits and average results to identify other parameters that would benefit effective treatment.	Study plant performance effectiveness indicators. Investigate options to monitor important parameters for treatment control. Work with our treatment chemical vendor and consultant to review improved equipment, controls and chemical additives.	Options are included in the Enhanced Wastewater Process Monitoring Design.
Tin Line Chem/Treat sump	If the existing conductivity probe should experience calibration drift the sump shutdown controls may not function properly.	Install an additional conductivity probe in the sump.	Install an additional conductivity probe which will act independently of the existing probe to alert for high chrome concentrations and shutdown sump pumps.	Probe was installed.
Chrome Line Plater sump	If the existing conductivity probe should experience drift from calibration the sump shutdown controls may not function properly.	Install an additional conductivity probe in the sump.	Install an additional conductivity probe which will act independently of the existing probe to alert for high chrome concentrations and shutdown sump pumps.	Probe was installed.
Chrome Line Plater sump	Chrome wastewater enters the sump from 2 separate areas. The existing conductivity probe may not detect high chrome concentrations quickly.	Install an additional conductivity probe in the sump.	Install an additional conductivity probe so that each influent source can be monitored rapidly. This will allow a detection of high chrome concentration from either influent source and shutdown the sump pumps. Each probe will act independently to alert for high chrome concentrations and shutdown sump pumps.	Probes were installed.

**Potential Unauthorized Discharges**

<i>Equipment Area</i>	<i>Issue</i>	<i>Correction/Investigation</i>	<i>Actions</i>	<i>Actions</i>
Tin Line Annex	Leaking acid tanks could discharge large volume of acid to open top of DIW vault. The surge of acid could upset treatment at Final Treat.	Repair eroded concrete around top of DIW vault to prevent acid leaks from accessing the vault.	Arrange for contractor to perform repair to the DIW vault.	Repairs to vault were completed eliminating access point
Tin Line Looper Pit-Sump	Split of discharge piping configuration will direct the discharge to either Final Treat via the DIW system or the Chrome Plant. Discharge potentially contains hexavalent chromium.	Prevent discharge from the sump to the DIW system.	Modify the piping system to eliminate access to the DIW system.	piping modifications were completed

**Discharges in Exceedance of Permit Limits**

<i>Equipment Area</i>	<i>Issue</i>	<i>Correction/Investigation</i>	<i>Actions</i>	<i>Actions</i>
Chrome Plant Lamellas	Turbidimeter measures one effluent trough, no monitoring of other two. Solids may be carried over without detection.	Install a turbidimeter in each trough (purchase two additional turbidimeters for each train).	Completed installation of the additional turbidimeters. Determine alarm levels and required response.	Turbidimeters were installed. Alarms and responses are automated.

**United States Steel Corporation – Midwest Plant  
Enhanced Monitoring Assessment Summary**

<i>Equipment Area</i>	<i>Issue</i>	<i>Correction/Investigation</i>	<i>Actions</i>	<i>Status of Action as of December 21, 2018</i>
Chrome Plant Lamellas	Safety and ergonomic difficulty in accessing lamella plates for maintenance and cleaning.	Extend the access platform to allow operators safe access to the entire lamella plate and effluent trough area.	Additional platforms have been installed. Evaluate if additional improvements are necessary so operators can properly service the Lamellas.	Additional platforms were installed for operator access.
Chrome Line Heat Exchangers	Single-walled heat exchangers developed leak into non-contacting cooling water side.	Replace the single-walled heat exchangers with double-walled heat exchangers.	Completed - replacement of ChemTreat single walled HX. Outstanding - Install backup double walled ChemTreat and Plater heat exchangers.	Completed - replacement of ChemTreat and Plater single walled HX.

## **Appendix 3**

### **Photo Documentation of Repairs**

## Photographic Summary of Actions Taken by U. S. Steel Pursuant to the Midwest Consent Decree

Pursuant to the Consent Decree between the United States, Indiana and United States Steel Corporation ("U. S. Steel"), U. S. Steel made a number of improvements at its Midwest Facility. This document provides a photographic summary of numerous improvements made pursuant to the Consent Decree and the Enhanced Wastewater Process Monitoring Design. Photos, with a brief description of the action taken, are provided below.


**Picture 1:** This picture shows the work performed pursuant to Consent Decree Paragraph 9.a.i., 9.a.ii., 9.a.iii., and 9.a.iv.




**Picture 2:** This picture shows the work performed pursuant to Consent Decree Paragraph 9.a.i., 9.a.ii., 9.a.iii., and 9.a.iv.



**Picture 3:** This picture shows the work performed pursuant to Consent Decree Paragraph 9.a.iv.

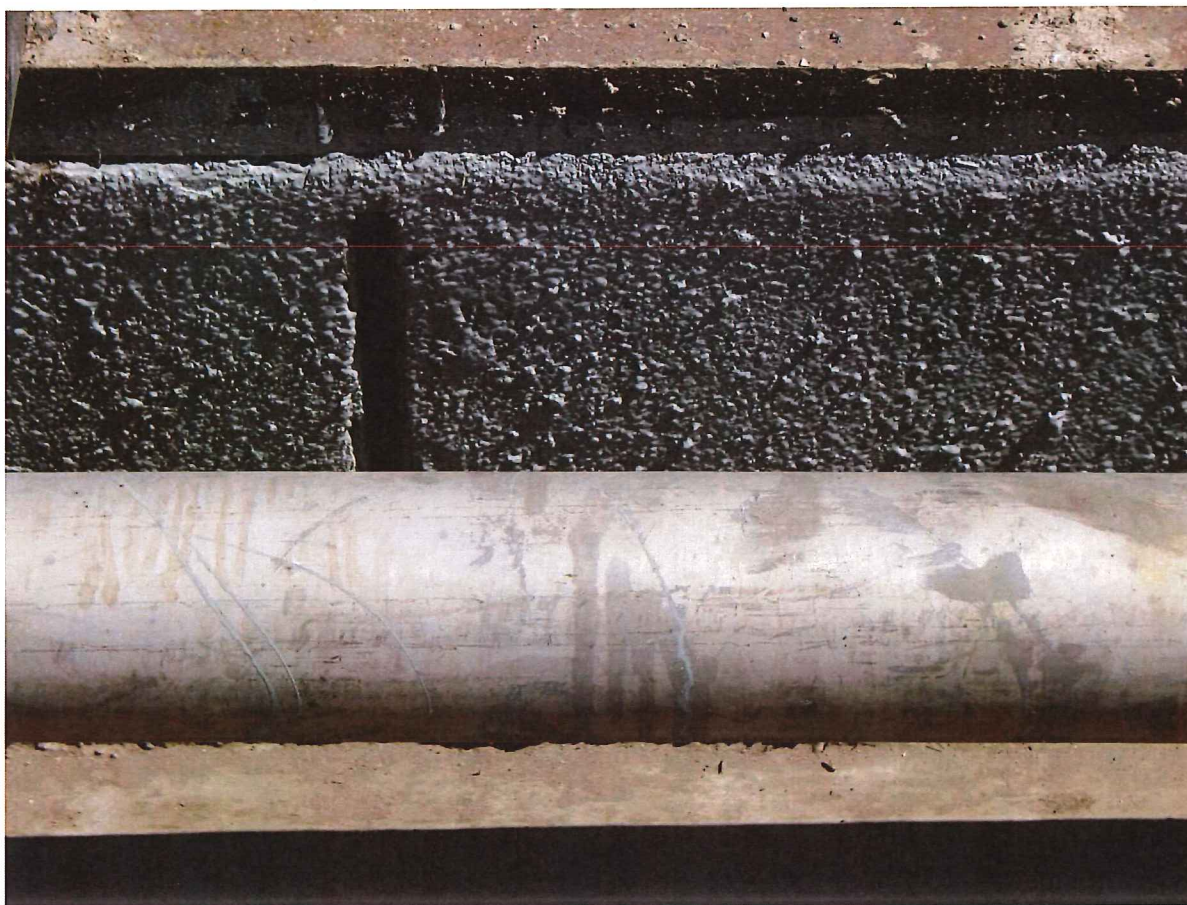

**Picture 4:** This picture shows newly installed double walled heat exchanger on January 15, 2018 pursuant to Consent Decree Paragraph 9.v.

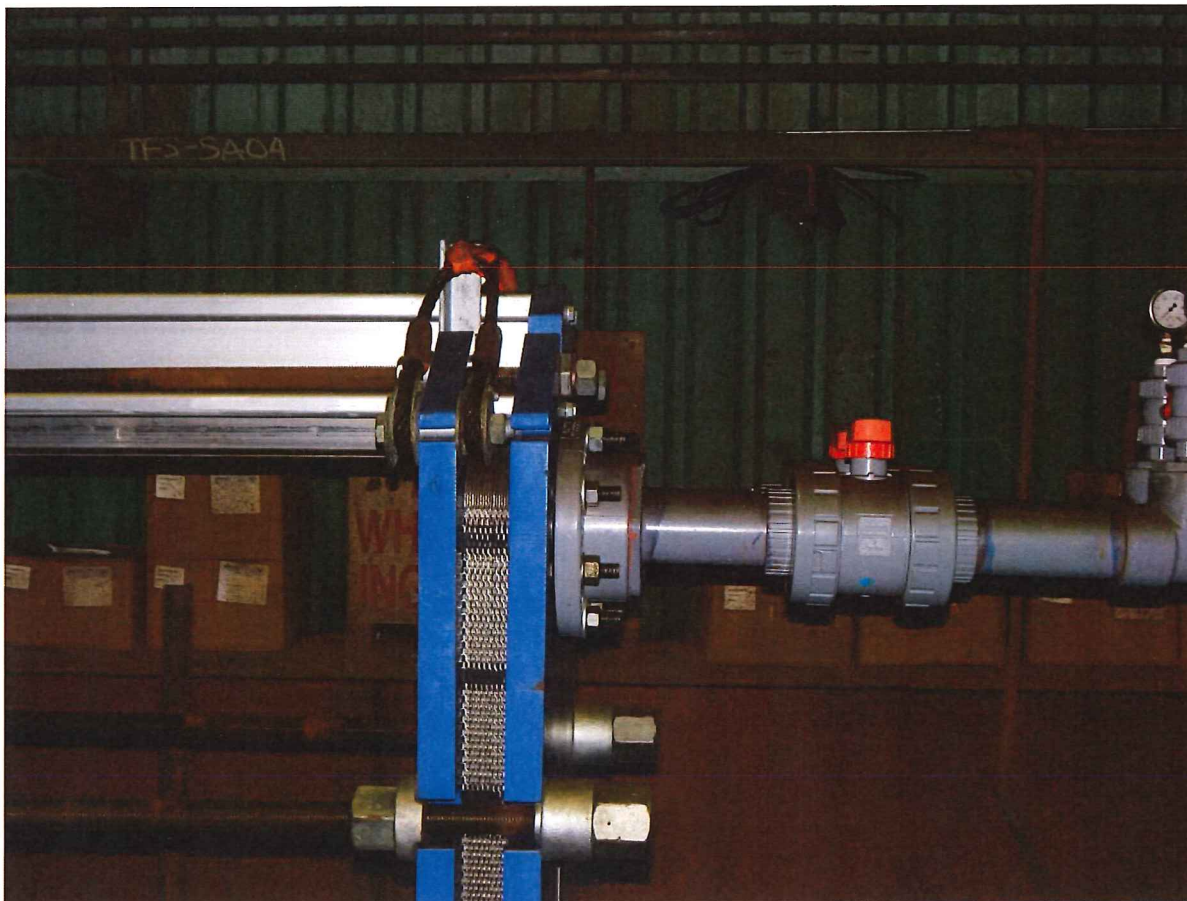




**Picture 5:** This picture shows the newly installed back up double walled heat exchanger pursuant to the Enhancend Wastewater Process Monitoring Design



**Picture 6:** Chrome containment trench: pictures of inlet flow meter on chrome transfer pipeline

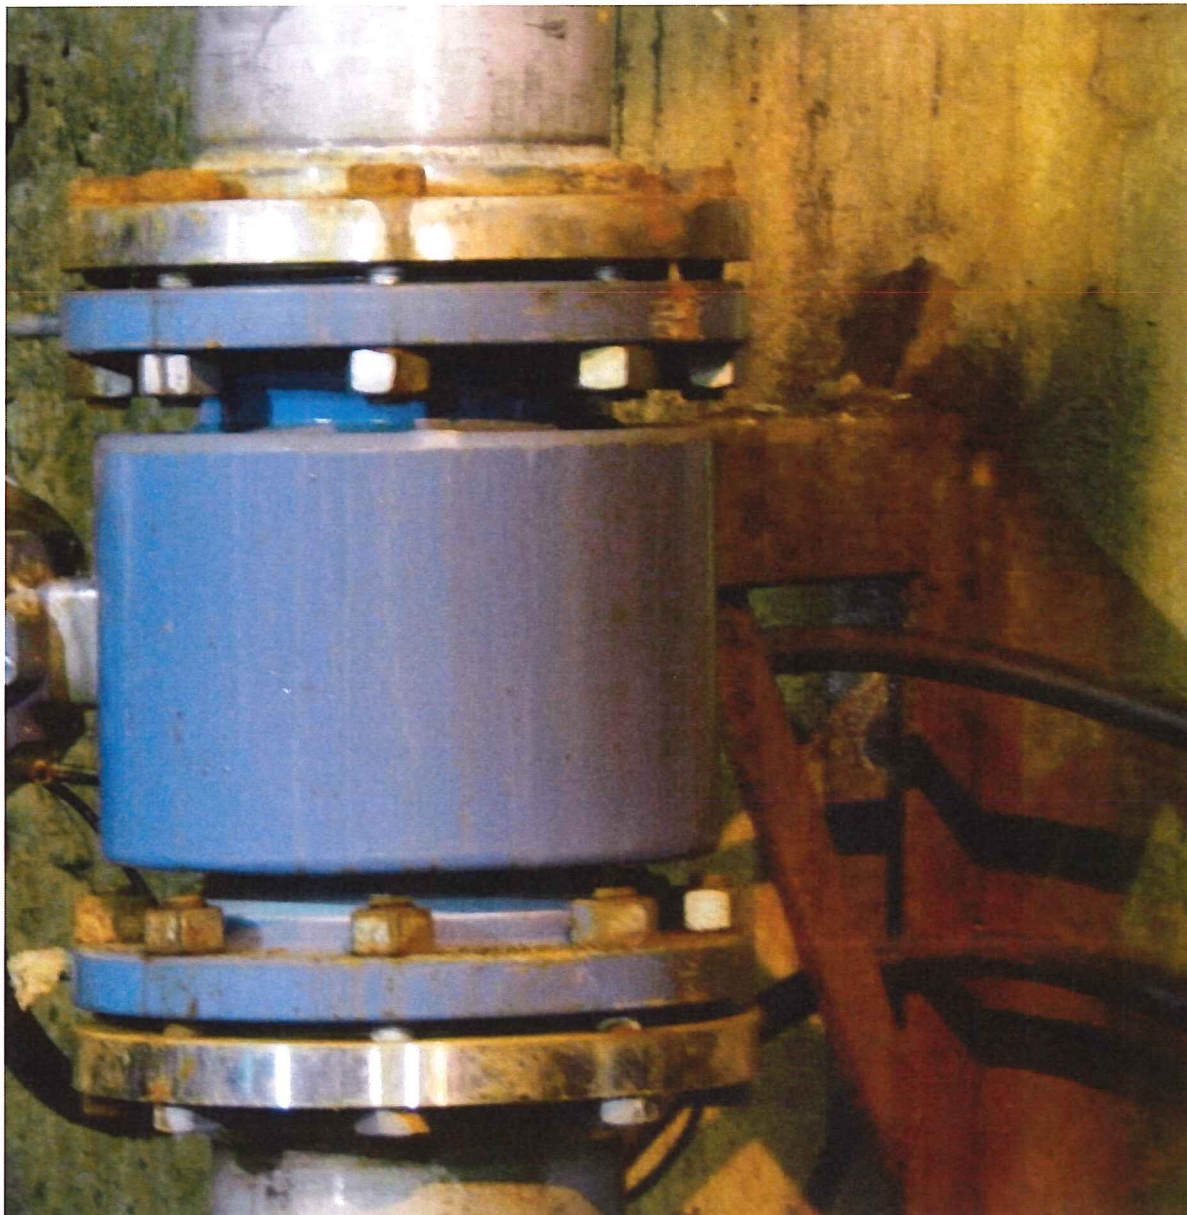

**Picture 7:** Chrome containment trench: pictures of outlet flow meter on chrome transfer pipeline



**Picture 8:** Chrome Line Plater: picture of conductivity probes installed



**Picture 9:** Chrome containment trench sump: Picture of high level float




Picture 10: Final treatment plant discharge: Picture of ChemScan unit currently being trialed



**Picture 11:** Chrome Line Evaporator: Picture of redundant level sensors installed on top of Evaporator



**Picture 12:** Chrome Line Evaporator: Picture of box housing relay installed to open vacuum breaker valve

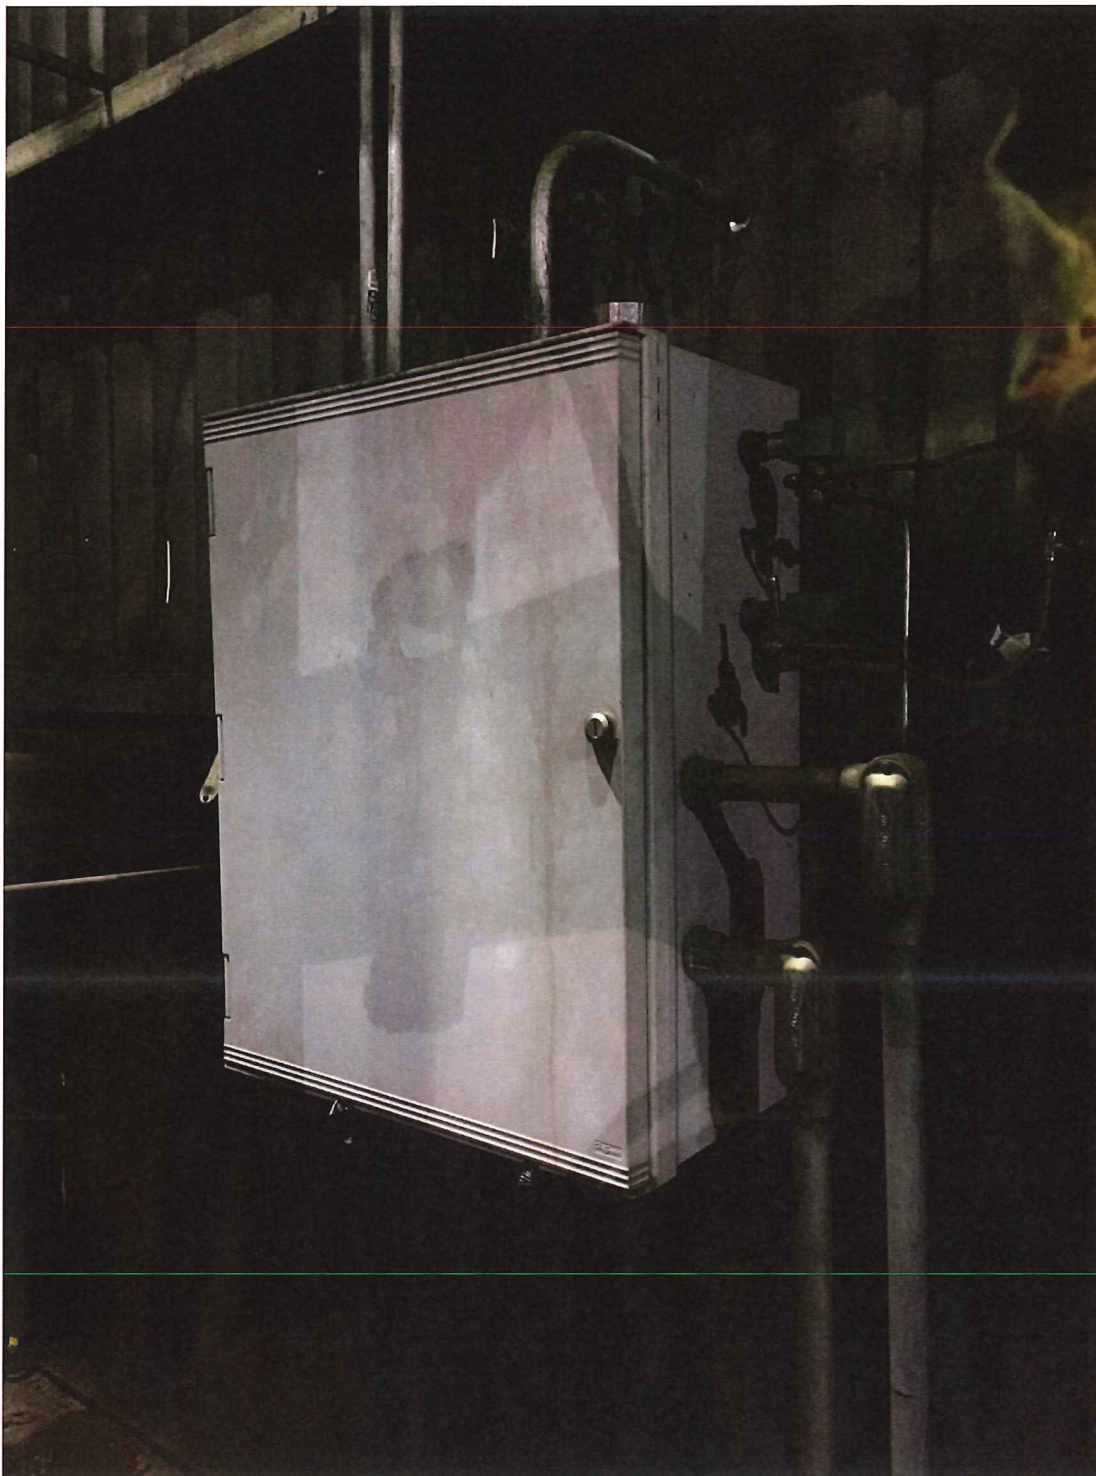




Picture 13: Tin Line Chem Treat Sump: Picture of Conductivity Meter Installed



**Picture 14:** Tin Line Looper Pit Sump: Picture of modifications to piping system to eliminate access to DIW



**Picture 15:** Tin Line Annex: Picture of repairs and sealing of DIW vault

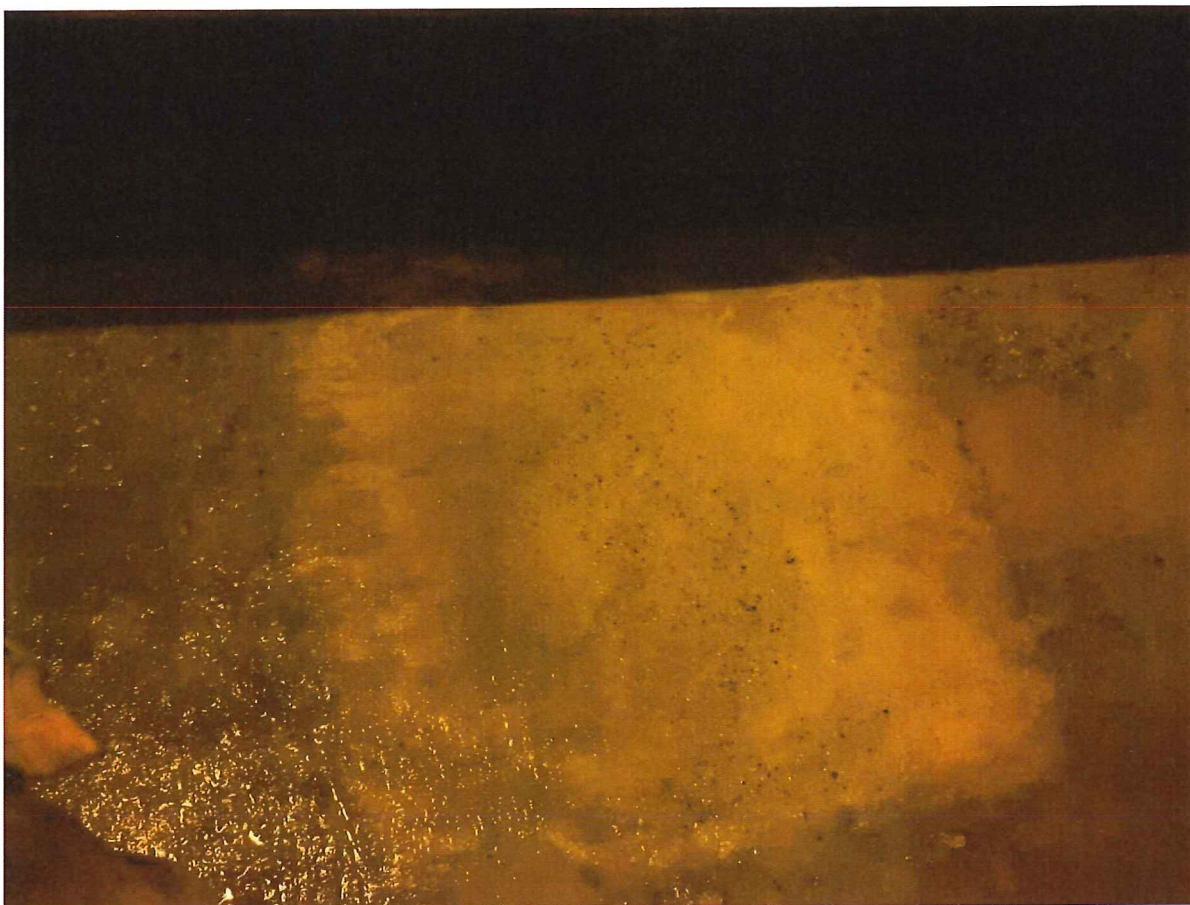

**Picture 16:** Chrome Containment Trench: Conductivity probe installed to help detect small leaks of chrome wastewater from pipeline



**Picture 17:** Chrome plant lamellas: Pictures of access platforms installed



Picture 18: Chrome Plant Lamellas: Picture of Turbidimeter Reading



**Picture 19:** Chrome plant lamellas: Pictures of additional turbidimeters

