

THE ENVIRONMENTAL TECHNOLOGY VERIFICATION



ETV Joint Verification Statement

TECHNOLOGY TYPE:	PAINT OVERSPRAY ARRESTOR
APPLICATION:	CONTROL OF PARTICLE EMISSIONS FROM AEROSPACE PAINT SPRAYING FACILITIES
TECHNOLOGY NAME:	DMK804404 and PB2424
COMPANY:	Purolator Products Air Filtration Company
ADDRESS:	880 Facet Rd. PHONE:(252) 492-1141 ext 4201 Henderson, NC 27536 FAX: (252) 492-6157
WEB SITE:	http://www.purolatorair.com
E-MAIL:	justtom@inet4u.com

The U.S. Environmental Protection Agency (EPA) has created the Environmental Technology Verification (ETV) Program to facilitate the deployment of innovative or improved environmental technologies through performance verification and dissemination of information. The goal of the ETV Program is to further environmental protection by substantially accelerating the acceptance and use of improved and cost-effective technologies. ETV seeks to achieve this goal by providing high quality, peer reviewed data on technology performance to those involved in the design, distribution, financing, permitting, purchase, and use of environmental technologies.

ETV works in partnership with recognized standards and testing organizations; stakeholder groups which consist of buyers, vendor organizations, permittees, and other interested parties; and with the full participation of individual technology developers. The program evaluates the performance of innovative technologies by developing test plans that are responsive to the needs of stakeholders, conducting field or laboratory tests (as appropriate), collecting and analyzing data, and preparing peer reviewed reports. All evaluations are conducted in accordance with rigorous quality assurance protocols to ensure that data of known and adequate quality are generated and that the results are defensible.

The Air Pollution Control Technology (APCT) program, one of 12 technology areas under ETV, is operated by the Research Triangle Institute (RTI), in cooperation with EPA's National Risk Management Research Laboratory. APCT has recently evaluated the performance of paint overspray arrestors used primarily in the aerospace industry. This verification statement provides a summary of the test results for the Purolator DMK804404 and PB2424 2-stage system.

VERIFICATION TEST DESCRIPTION

All tests were performed in accordance with the APCT "Generic Verification Protocol for Paint Overspray Arrestors." The protocol incorporates all requirements of EPA Method 319: Determination of Filtration Efficiency for Paint Overspray Arrestors. [Method 319 is part of the National Emission Standards for Hazardous Air Pollutants (NESHAP) for Aerospace Manufacturing and Rework Facilities and was published in the *Federal Register* on March 27, 1998 (40 CFR Part 63).] The protocol also includes requirements for quality management, quality assurance, procedures for product selection, auditing of the test laboratories, and test reporting format.

Filtration efficiency is computed from aerosol concentrations measured upstream and downstream of an arrestor installed in a laboratory test rig. The aerosol concentrations upstream and downstream of the arrestor are measured with an aerosol analyzer that simultaneously counts and sizes the particles in the aerosol stream. The aerosol analyzer covers the particle diameter size range from 0.3 to 10 μm in a series of contiguous sizing channels. Each sizing channel covers a narrow range of particle diameters. By taking the ratio of the downstream to upstream particle counts on a channel by channel basis, the filtration efficiency is computed for each of the sizing channels.

The following series of tests were performed at a face velocity of 120 fpm (0.61 m/s):

- C Three arrestors were tested using a liquid-phase aerosol challenge,
- C Three arrestors were tested using a solid-phase aerosol challenge,
- C Seven "no-filter" control tests (one performed prior to each arrestor and reference filter test),
- C One HEPA filter control test, and
- C One reference filter control test.

TECHNOLOGY DESCRIPTION

As shown in Figure 1, the Purolator DMK804404 and PB2424 is a two stage system consisting of the DMK804404 pleated panel and the PB2424 flat panel filters. The DMK804404, or Mark 80D, has nominal dimensions of 24 x 24 x 4 in. (0.61 x 0.61 x 0.10 m), 20 pleats, and blue media in a white cardboard frame. The DMK804404 is labeled directly on the cardboard stating: Mark80D Medium Efficiency Panel Air Filter, Purolator Products Air Filtration Company, 24" x 24" Nominal Size, 23 3/8" x 23 3/8" x 3 3/4" (59.3 cm x 59.3 cm x 9.5 cm) exact size. The DMK804404 has an arrow indicating flow direction.

The PB2424, also known as Prebond, is nominally 25 x 25 x 2 in. (0.64 x 0.64 x 0.05 m), has tackified white media with a coarser upstream layer and thicker downstream layer and is not individually labeled. The box containing the PB2424 was labeled: FACET-AIRE Air Filters, 12 ea., 25x25x2.

VERIFICATION OF PERFORMANCE

Verification testing of the Purolator DMK804404 and PB2424 was performed from September 8 to 10, 1999 at the test facilities of RTI. For ready comparison, the filtration efficiency requirements of the NESHAP are tabulated with the test results in Tables 1 through 4. The test results indicate that the tested arrestor met the requirements listed in Tables 1 and 2 for existing sources but not those in Tables 3 and 4 for new sources. The pressure drop across the tested arrestors at 120 fpm (0.61 m/s) ranged from 0.10 to 0.11 in. H₂O (25 to 27 Pa) for each of the six arrestors tested.

The APCT quality assurance officer has reviewed the test results and the quality control data and has concluded that the data quality objectives given in the generic verification protocol have been attained.

In accordance with the generic verification protocol, this Verification Statement is applicable to paint overspray arrestors manufactured between the publication date of the Verification Statement (3/17/2000) and 12 months thereafter.

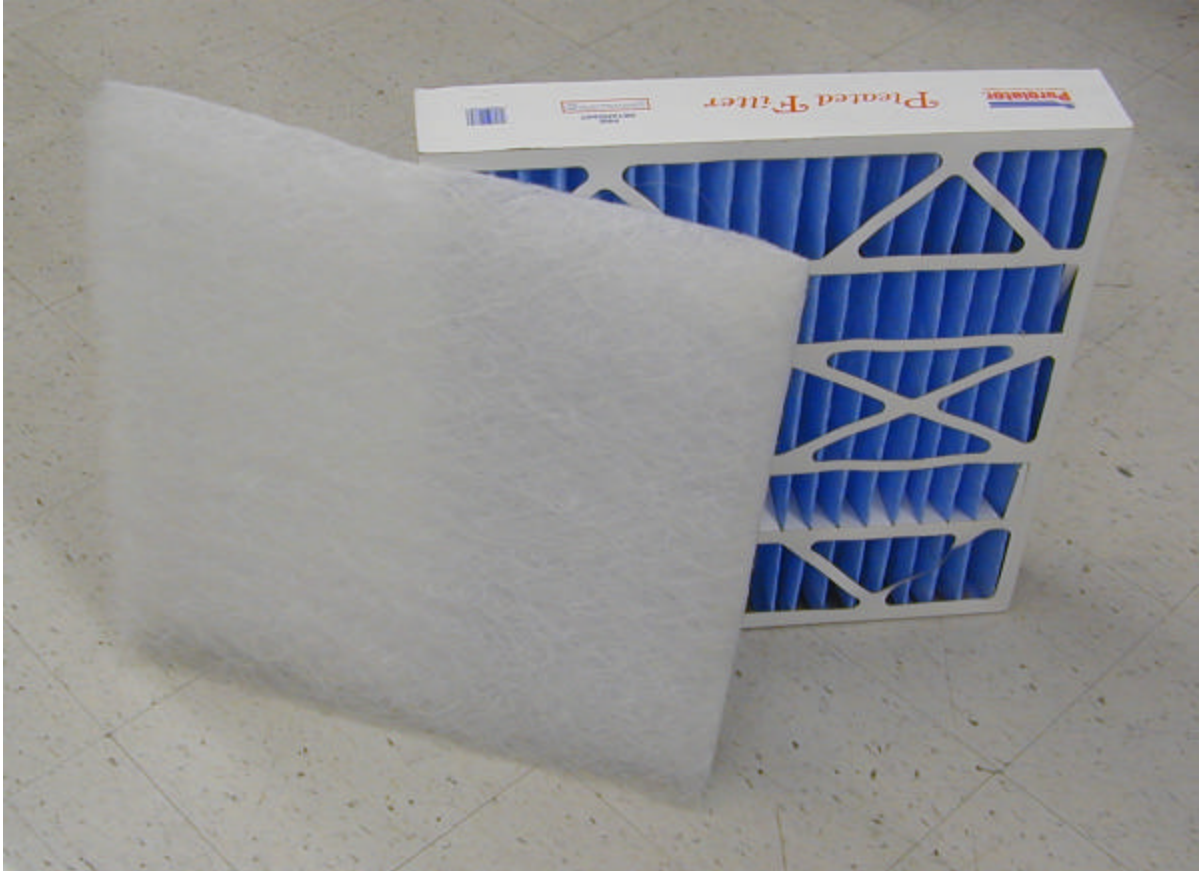


Figure 1. Photograph of the Purolator DMK804404 and PB2424 paint overspray arrestor system.

**TABLE 1. EXISTING SOURCES*:
LIQUID-PHASE CHALLENGE AEROSOL PARTICLES**

Aerodynamic particle diameter range, μm	Filtration efficiency requirement, %	Filtration efficiency achieved, %
> 5.7	> 90	99
> 4.1	> 50	96
> 2.2	> 10	71

**TABLE 2. EXISTING SOURCES*:
SOLID-PHASE CHALLENGE AEROSOL PARTICLES**

Aerodynamic particle diameter range, μm	Filtration efficiency requirement, %	Filtration efficiency achieved, %
> 8.1	> 90	99
> 5.0	> 50	96
> 2.6	> 10	77

**TABLE 3. NEW SOURCES*:
LIQUID-PHASE CHALLENGE AEROSOL PARTICLES**

Aerodynamic particle diameter range, μm	Filtration efficiency requirement, %	Filtration efficiency achieved, %
> 2.0	> 95	68
> 1.0	> 80	38
> 0.42	> 65	30

**TABLE 4. NEW SOURCES*:
SOLID-PHASE CHALLENGE AEROSOL PARTICLES**

Aerodynamic particle diameter range, μm	Filtration efficiency requirement, %	Filtration efficiency achieved, %
> 2.5	> 95	76
> 1.1	> 85	52
> 0.70	> 75	43

*A new source is any affected source that commenced construction after October 29, 1996.
An existing source is any affected source that is not new.

