

**AGENCY OF NATURAL RESOURCES
DEPARTMENT OF ENVIRONMENTAL CONSERVATION
WATERSHED MANAGEMENT DIVISION
ONE NATIONAL LIFE DRIVE, MAIN BUILDING, 2nd FLOOR
MONTPELIER, VT 05620-3522**

Permit No.: 3-1284
PIN: EJ95-0299
NPDES No.: VT0100358

Name of Applicant: City of South Burlington
575 Dorset Street
South Burlington, VT 05403

Expiration Date: June 30, 2022

**DRAFT
DISCHARGE PERMIT**

In compliance with the provisions of the Vermont Water Pollution Control Act as amended (10 V.S.A. Chapter 47), the Vermont Water Pollution Control Permit Regulations as amended (Environmental Protection Rules, Chapter 13), and the federal Clean Water Act as amended (33 U.S.C. § 1251 *et seq.*) and implementing federal regulations, the City of South Burlington, Vermont (hereinafter referred to as the "Permittee") is authorized by the Secretary of the Agency Natural Resources (Secretary) to discharge from the Bartlett Bay Wastewater Treatment Facility (WWTF) to Lake Champlain in accordance with the following conditions.

This permit shall become effective on August 1, 2017.

Emily Boedecker, Commissioner
Department of Environmental Conservation

By: _____ Date: _____

I. SPECIAL CONDITIONS

A. EFFLUENT LIMITS

1. During the term of this permit, the Permittee is authorized to discharge from outfall serial number S/N 001 of the Bartlett Bay WWTF to Lake Champlain, an effluent for which the characteristics shall not exceed the values listed below:

EFFLUENT CHARACTERISTICS	DISCHARGE LIMITATIONS								
	Annual Average	Annual Limitation	Monthly Average	Weekly Average	Maximum Day	Monthly Average	Weekly Average	Maximum Day	Instantaneous Maximum
		Mass (lbs/yr)	Mass (lbs/day)		Concentration (mg/L)				

Flow, MGD	1.250		Monitor only ⁵						
Biochemical Oxygen Demand (5-day, 20° C) (BOD ₅) ¹			175	263		30	45	50	
Total Suspended Solids (TSS) ^{1, 2}			175	263		30	45	50	
Total Phosphorus (TP) (total pounds) ^{1, 3}		760				0.8			
Total Nitrogen (TN) ⁴					Monitor only			Monitor only	
Total Kjeldahl Nitrogen (TKN)								Monitor only	
Nitrate/Nitrite Nitrogen (NO _x)								Monitor only	
Settleable Solids									1.0 ml/L
<i>Escherichia coli</i>									77 CFU/100 mL
pH						Between 6.5-8.5 Standard Units			

1. The Permittee shall operate the facility to meet the concentration limitations or pounds limitation, whichever is more restrictive.
2. The Permittee shall operate the facility to meet the Total Suspended Solids concentration limitation, the Total Suspended Solids pounds limitation, or the Total Suspended Solids concentration which ensures that the ultraviolet light disinfection system can meet the *Escherichia coli* limitation, whichever is more restrictive.
3. Total annual pounds of phosphorus discharged shall be defined as the 12-month running annual load, as calculated in Condition I.B.3 and reported monthly on the WR-43-TP form.
4. Total nitrogen (TN) shall be reported as pounds, calculated as: $Average\ TN\ (mg/L) \times Total\ Daily\ Flow \times 8.34$; where, $TN\ (mg/L) = TKN\ (mg/L) + NO_x\ (mg/L)$.
5. Monthly average flow shall be calculated by summing daily effluent flow for each day in the given month and dividing the sum by the number of days of discharge in that month.

2. The effluent shall not have concentrations or combinations of contaminants including oil, grease, scum, foam, or floating solids which would cause a violation of the Vermont Water Quality Standards.
3. The effluent shall not cause visible discoloration of the receiving waters.
4. The monthly average concentrations of Biochemical Oxygen Demand (BOD₅) and Total Suspended Solids (TSS) in the effluent shall not exceed 15 percent of the monthly average concentrations of BOD₅ and TSS in the influent into the Permittee's WWTF. For the purposes of determining whether the Permittee is in compliance with this condition, samples from the effluent and the influent shall be taken with appropriate allowance for detention times.
5. If the effluent discharged for a period of 90 consecutive days exceeds 80 percent of the permitted flow limitation, the Permittee shall submit to the Secretary projected loadings and a program for maintaining satisfactory treatment levels consistent with approved water quality management plans.
6. The Permittee shall clean the quartz sleeves of the ultraviolet light disinfection system at a frequency that assures that effective disinfection is maintained and the Permittee shall replace the ultraviolet light disinfection system lamps as necessary to maintain compliance with the *E. coli* limitation.
7. Any action on the part of the Secretary in reviewing, commenting upon, or approving plans and specifications for the construction of WWTFs shall not relieve the Permittee from the responsibility to achieve effluent limitations set forth in this permit and shall not constitute a waiver of, or act of estoppel against any remedy available to the Secretary, the State of Vermont, or the federal government for failure to meet any requirement set forth in this permit or imposed by state or federal law.

B. TOTAL PHOSPHORUS

1. Wasteload Allocation for Phosphorus

This permit includes a formal total phosphorus (TP) waste load allocation (WLA) of 0.345 metric tons per year (760 pounds per year), as established by the U.S. EPA in the 2016 "Phosphorus TMDLs for Vermont Segments of Lake Champlain" (LC TMDL). The Secretary reserves the right to reopen and amend this permit, pursuant to Condition II.B.4 of this permit, to include an alternate TP limitation and/or additional monitoring requirements based on the monitoring data, the results of phosphorus optimization activities, or a reallocation of phosphorus wasteload allocations between the Permittee and another WWTF pursuant to the requirements of the LC TMDL and Vermont's "Wasteload Allocation Process" Rule (Environmental Protection Rule, Chapter 17).

2. Phosphorus Optimization Plan

- a) **Within 120 days of permit issuance**, the Permittee shall develop or update (as appropriate), and submit to the Secretary a Phosphorus Optimization Plan (POP) to

increase the WWTF's phosphorus removal efficiency by implementing optimization techniques that achieve phosphorus reductions using primarily existing facilities and equipment. The POP shall:

- i. Be developed by a qualified professional with experience in the operation and design of WWTFs in consultation with the WWTF;
 - ii. Evaluate alternative methods of operating the existing WWTF, including operational, process, and equipment changes designed to enhance phosphorus removal. The techniques to be evaluated may include operational process changes to enhance biological and/or chemical phosphorous removal, incorporation of anoxic/anaerobic zones, septage receiving policies and procedures, and side stream management;
 - iii. Determine which alternative methods of operating the existing WWTF, including operational, process, and equipment changes will be most effective at increasing phosphorus removal; and
 - iv. Include a proposed implementation schedule for those methods of operating the WWTF determined to be most effective at increasing phosphorus removal.
- b) If the POP fails to meet the requirements of subsection (a) of this section, the WWTF shall revise the POP, as required by the Secretary. The Permittee shall commence implementation of the POP immediately.
- c) The Permittee shall annually submit a report to the Secretary as an attachment to the monthly electronic Discharge Monitoring Reporting (DMR) form WR-43 that documents:
- i. The optimization techniques implemented under the POP during the previous year.
 - ii. Whether the techniques are performing as expected.
 - iii. The annual average phosphorus discharges from the facility (per Condition I.B.3).
 - iv. The phosphorus discharge trends relative to the previous year.

The first annual report shall include data collected during 2018, and shall be attached to the December 2018 DMR form WR-43.

3. Phosphorus Load Calculation

In order to calculate running annual TP relative to the LC TMDL WLA:

- a) Calculate the average of results for all TP monitoring events conducted in a month.
Units = mg/L

- b) For flow, use the average daily flow for the month as reported on the DMR (this is the average of each day's average daily flow). Units = MGD
- c) $\text{Load} = (\text{calculated average TP}) \times (\text{average daily flow from DMR}) \times 8.34 \times \text{number of days in the month}$. Units = pounds (per month)
- d) Sum the results for the immediately preceding 12 months to derive the running annual load. Units = pounds (per year)

4. Phosphorus Elimination/Reduction Plan

- a) The facility shall have 12 months from the permit issuance date to optimize removal of total phosphorus.
- b) If, after the 12-month optimization period, the WWTF's actual, total phosphorus loads reach or exceed 80% of the TMDL WLA for the WWTF, based on the WWTF's 12-month running annual load calculated using the Phosphorus Load Calculation (Condition I.B.3 of this permit), the Permittee shall, within 90 days of reaching or exceeding 80% of the LC TMDL WLA for the WWTF, develop and submit to the Secretary a projection based on the WWTF's current operations and expected future loadings of whether it will exceed its WLA during the permit term.
- c) If the facility is not projected to exceed its WLA within the permit term, the WWTF shall reassess when it is projected to reach its WLA prior to seeking permit renewal and submit that information with its next permit application.
- d) If the facility is projected to exceed its WLA during the permit term, the Permittee shall submit a Phosphorus Elimination/Reduction Plan (PERP) within 6 months from the date of submittal of the projection submitted under Part I.B.4.b. The PERP shall be submitted to the Secretary to ensure the WWTF continues to comply with its WLA.
- e) The PERP shall be developed by qualified professionals in consultation with the WWTF.
- f) The PERP shall include:
 - i. An evaluation of alternatives to ensure the WWTF's compliance with its WLA;
 - ii. An identification of the chosen alternative or alternatives to ensure the WWTF's compliance with its WLA;
 - iii. A proposed schedule, including an engineer approved design and construction schedule and, if the chosen alternative or alternatives require a pilot study, a schedule for testing, that shall ensure the WWTF's compliance with its WLA as soon as possible; and

- iv. A financing plan that estimates the costs for implementing the PERP and describes a strategy for financing the project.
- g) The PERP shall be treated as an application to amend the permit, and therefore, shall be subject to all public notice, hearing, and comment provisions, in place at the time the plan is submitted, that are applicable to permit amendments. The WWTF shall revise the PERP, if required by the Secretary.

C. WASTE MANAGEMENT ZONE

In accordance with 10 V.S.A. § 1252, this permit hereby establishes a waste management zone that extends for a 200-foot radius around the outfall of the Bartlett Bay WWTF in Lake Champlain.

D. REAPPLICATION

If the Permittee desires to continue to discharge after the expiration of this permit, the Permittee shall reapply on the application forms then in use at least 180 days before this permit expires.

Reapply for a Discharge Permit by: **December 31, 2021**

E. OPERATING FEES

This discharge is subject to operating fees as required by 3 V.S.A. § 2822.

F. TOXICITY TESTING

1. WHOLE EFFLUENT TOXICITY (WET) TESTING.

- a. During **August or September 2019 and 2021**, the Permittee shall conduct a two-species (*Pimephales promelas* and *Ceriodaphnia dubia*) 48-hour acute and 96-hour chronic WET tests on a composite effluent sample collected from S/N 001. The results shall be submitted to the Secretary by **December 31, 2019 and December 31, 2021**, respectively.
- b. During **March or April 2018 and 2020**, the Permittee shall conduct a two-species (*Pimephales promelas* and *Ceriodaphnia dubia*) 48-hour acute and 96-hour chronic WET tests on a composite effluent sample collected from S/N 001. The results shall be submitted to the Secretary by **June 30, 2018 and June 30, 2020**, respectively.

The WET tests shall be conducted according to the procedures and guidelines specified in “Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms” and “Short-Term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Freshwater Organisms” (both documents U.S. EPA October 2002 or, if a newer addition is available, the most recent addition).

2. By **December 31, 2018, December 31, 2019, and December 31, 2020**, the Permittee shall conduct an effluent analysis of S/N 001 for the pollutants included in Appendix J, Table 2 of 40 C.F.R. Part 122 (see ATTACHMENT A) and submit the results to the Secretary.

Based upon the results of these tests or any other toxicity tests conducted, the Secretary reserves the right to reopen and amend this permit, pursuant to Condition II.B.4 of this permit, to require additional WET testing or a Toxicity Reduction Evaluation be conducted.

G. MONITORING AND REPORTING

1. Sampling and Analysis

The sampling, preservation, handling, and analytical methods used shall conform to the test procedures published in 40 C.F.R. Part 136.

The Permittee shall use sufficiently sensitive test procedures (i.e., methods) approved under 40 C.F.R. Part 136 for the analysis of the pollutants or pollutant parameters specified in Condition I.A. above.

Samples shall be representative of the volume and quality of effluent discharged over the sampling and reporting period. All samples are to be taken during normal operating hours. The Permittee shall identify the effluent sampling location used for each discharge. A description of the effluent sample location is included in Condition I.G.2.

2. Effluent Monitoring

During the term of this permit, the Permittee shall monitor and record the quality and quantity of discharge(s) at outfall serial number S/N 001 of the Bartlett Bay WWTF, according to the following schedule and other provisions:

PARAMETER	MINIMUM FREQUENCY OF ANALYSIS	SAMPLE TYPE
Flow	Continuous	Daily Total, Max., Min.
Biochemical Oxygen Demand (BOD ₅)	1 × week	composite ¹
Total Suspended Solids (TSS)	1 × week	composite ¹
Total Phosphorus (TP)	1 × week	composite ^{1,2}
Total Nitrogen (TN)	1 × month	[calculated] ³
Total Kjeldahl Nitrogen (TKN)	1 × month	composite ¹
Nitrate/Nitrite Nitrogen (NO _x)	1 × month	composite ¹
Settleable Solids	1 × day	grab ⁴
<i>Escherichia coli</i>	1 × week	grab
pH	1 × day	grab
Temperature	1 × year	grab
Ammonia (as N)	1 × year	grab
Dissolved Oxygen	1 × year	grab
Oil & Grease	1 × year	grab
Total Dissolved Solids (TDS)	1 × year	composite ¹

Samples collected in compliance with the monitoring requirements specified above shall be collected at the outlet end of the ultraviolet light disinfection channel.

¹ Composite samples for BOD₅, TSS, TP, TKN, NO_x, and TDS shall be taken during the hours 6:00 AM to 6:00 PM, unless otherwise specified. Eight hours is the minimum period for the composite, 24 hours is the maximum period for the composite.

² Submit results each month on Total Phosphorus Monitoring Report Form WR-43-TP.

³ TN = TKN + NO_x

⁴ Settleable Solids samples shall be collected between 10:00 AM and 2:00 PM or during the period of peak flow.

3. Annual Constituent Monitoring

Annually, by December 31, the Permittee shall monitor S/N 001 and submit the results, including units of measurement, as an attachment to the DMR form WR-43 for the month in which the samples were taken for the following parameters:

Temperature
 Ammonia (as N)
 Dissolved Oxygen
 Oil & Grease
 Total Dissolved Solids

Grab samples shall be used for Temperature, Ammonia, Dissolved Oxygen, and Oil & Grease; a composite sample shall be used for Total Dissolved Solids. Samples shall be representative of the seasonal variation in the discharge.

The season in which samples are taken shall change chronologically from year to year. The sampling seasons are as follows: Winter (January 1 – March 31), Spring (April 1 – June 30), Summer (July 1 – September 30), and Fall (October 1 – December 31). The first samples under this permit should be taken during the **Fall** season. The second samples should be taken during the Summer season, the third in the Fall, and so forth in chronological order. For easy reference regarding the season in which sampling is recommended, please refer to the “Guidance for Annual Constituent Monitoring.”

4. Influent Monitoring

During the term of this permit, the Permittee shall monitor the quality of the influent according to the following schedule and provisions:

PARAMETER	MINIMUM FREQUENCY OF ANALYSIS	SAMPLE TYPE
Biochemical Oxygen Demand (BOD ₅)	1 × month	composite ¹
Total Suspended Solids (TSS)	1 × month	composite ¹

¹ Composite samples for BOD₅ and TSS shall be taken during the hours 6:00 AM to 6:00 PM, unless otherwise specified. Eight hours is the minimum period for the composite, 24 hours is the maximum period for a composite.

5. Reporting

The Permittee is required to submit monthly reports of monitoring results on DMR form WR-43 and WR-43-TP. Reports are due on the 15th day of each month, beginning with the month following the issuance date of this permit.

The Permittee shall electronically submit its DMRs via Vermont’s online electronic reporting system. The Permittee shall begin this electronic submission in accordance with the schedule provided by the Secretary. The Permittee shall electronically submit additional compliance monitoring data and reports specified by the Secretary. When the Permittee submits DMRs using an electronic system designated by the Secretary, it is not required to submit hard copies of DMRs.

If, in any reporting period, there has been no discharge, the Permittee must submit that information by the report due date.

Until such time as the Permittee is required by the Secretary to submit monitoring and reports electronically, the Permittee shall send signed copies of these to the Secretary at the following address:

Agency of Natural Resources
Department of Environmental Conservation
Watershed Management Division
One National Life Drive, Main Building, 2nd Floor
Montpelier, VT 05620-3522

All monitoring and reports shall be signed:

- a) In the case of corporations, by a principal executive officer of at least the level of vice president, or his/her duly authorized representative, if such representative is responsible for the overall operation of the facility from which the discharge described in the permit originates and the authorization is made in writing and submitted to the Secretary;
- b) In the case of a partnership, by a general partner;
- c) In the case of a sole proprietorship, by the proprietor; or
- d) In the case of a municipal, State, or other public facility, by either a principal executive officer, ranking elected official, or other duly authorized employee.

In addition to the monitoring and reporting requirements given above, daily monitoring of certain parameters for operational control shall be submitted to the Secretary on the DMR form WR-43. Operations reports shall be submitted monthly.

6. Recording of Results

The Permittee shall maintain records of all information resulting from any monitoring activities required, including:

- a) The exact place, date, and time of sampling or measurement;
- b) The individual(s) who performed the sampling or measurements;
- c) The dates and times the analyses were performed;
- d) The individual(s) who performed the analyses;
- e) The analytical techniques and methods used including sample collection handling and preservation techniques;

- f) The results of such analyses;
- g) The records of monitoring activities and results, including all instrumentation and calibration and maintenance records; and
- h) The original calculation and data bench sheets of the operator who performed analysis of the influent or effluent pursuant to requirements of Condition I.A of this permit.
- i) For analyses performed by contract laboratories:
 - a. The detection level reported by the laboratory for each sample; and
 - b. The laboratory analytical report including documentation of the QA/QC and analytical procedures.

The results of monitoring requirements shall be reported (in the units specified) on the DMR form WR-43 or other forms approved by the Secretary.

When “non-detects” are recorded, the method detection limit shall be reported and used in calculating any time-period averaging for reporting on DMRs.

7. Additional Monitoring

If the Permittee monitors any pollutant at the location(s) designated herein more frequently than required by this permit, using approved analytical methods as specified above, the results of such monitoring shall be included in the calculation and reporting of the values required in the DMR form WR-43. Such increased frequency shall also be indicated.

H. DRY WEATHER FLOWS

Dry weather flows of untreated municipal wastewater from any sanitary or combined sewers are not authorized by this permit and are specifically prohibited by state and federal laws and regulations. If for any reason there is a discharge to waters of the State of dry weather flows of untreated municipal wastewater from any sanitary or combined sewer, the operator of the facility or the operator’s delegate shall comply with the notice requirements outlined in Condition II.A.2 of this permit.

I. OPERATION, MANAGEMENT, AND EMERGENCY RESPONSE PLANS

1. The Permittee shall implement the Operation, Management, and Emergency Response Plan for the treatment facility, sewage pumping stations, and sewer line stream crossings as approved by the Secretary on June 2, 2009.
2. By no later than **December 31, 2017**, the Permittee shall prepare and submit to the Secretary for review and approval, an Operation, Management, and Emergency Response Plan for the sewage collection system. The Permittee shall implement the plan upon submittal. This plan shall comply with the provisions of 10 V.S.A. § 1278 which require:

- a. Identification of those elements of the facility, including collection systems that are determined to be prone to failure based on installation, age, design, or other relevant factors.
- b. Identification of those elements of the facility identified under subdivision (a) of this subsection which, if one or more failed, would result in a significant release of untreated or partially treated sewage to surface waters of the State.
- c. A requirement that the elements identified in subdivision (b) of this subsection shall be inspected in accordance with a schedule approved by the Secretary.
- d. An emergency contingency plan to reduce the volume of a detected spill and to mitigate the effect of such a spill on public health and the environment.

The Permittee shall revise these plans upon the Secretary's request or on its own motion to reflect equipment or operational changes.

J. ENGINEERING EVALUATION AND REPORT

By **December 31, 2019**, the Permittee shall conduct an in-depth engineering inspection/evaluation of the WWTF and shall submit a written report of the results to the Secretary. The engineering inspection and report shall be conducted and prepared in accordance with the following conditions:

A professional engineer with experience in the design and operation of municipal wastewater treatment facilities shall be hired to perform an in-depth inspection of the WWTF, pump stations, collection system, and manholes. At the treatment facility, all components which are critical to the treatment process or which could adversely affect effluent quality in the event of their failure shall be inspected. Such components shall include: grit removal systems, comminutors, tank and partition integrity, biological systems, aeration systems, piping, clarifier drives and chlorination and dechlorination systems, flow metering systems, all critical and necessary valves, sludge handling equipment (digesters and appurtenances), etc. In the pump stations, all components critical to the proper conveyance of sewage, the prevention of sewage bypass, and the supporting appurtenances shall be inspected. This includes pumps, alarms, check valves, piping, motor controls, ventilators, dehumidifiers and sumps pumps, if so equipped, and the station structure.

The inspection is to be comprised of visual observation of equipment operability and condition as well as a review of maintenance records to determine recurring equipment problems and to estimate future life. Calibration checks shall be performed on all flow meters.

The resulting written inspection report shall document the components inspected, their condition, and include recommendations for currently needed repairs or replacements and/or the need for on-site spare parts. The projected date of replacement or major rehabilitation of each component and the anticipated cost shall be estimated. The Permittee shall determine how the future anticipated costs will be met and advise the Secretary in a letter transmitted with the written inspection report. The Secretary recommends an annual set-aside to a sinking fund so that funds are immediately available for the necessary rehabilitations or replacements.

Should the Secretary determine that certain critical components are in need of repair or replacement due to the results of the inspection report, this permit may be reopened and

amended, pursuant to Condition II.B.4 of this permit, to include an implementation schedule for repair or replacement of those components.

K. EMERGENCY ACTION - ELECTRIC POWER FAILURE

The Permittee shall indicate in writing to the Secretary **within 90 days after the issuance date of this permit** that in the event the primary source of electric power to the WWTF (including pump stations) fails, the Permittee shall either provide an alternative source of power for the operation of its WWTF, or demonstrate that the treatment facility has the capacity to store the wastewater volume that would be generated over the duration of the longest power failure that would have affected the facility in the last five years, excluding catastrophic events.

The alternative power supply, whether from a generating unit located at the WWTF or purchased from an independent source of electricity, must be separate from the existing power source used to operate the WWTF. If a separate unit located at the WWTF is to be used, the Permittee shall certify in writing to the Secretary when the unit is completed and prepared to generate power.

L. SEWER ORDINANCE

The Permittee shall have in effect a sewer use ordinance acceptable to the Secretary which, at a minimum, shall:

1. Prohibit the introduction by any person into the Permittee's sewerage system or WWTF of any pollutant which:
 - a) Is a toxic pollutant in toxic amounts as defined in standards issued from time to time under Section 307(a) of the Clean Water Act;
 - b) Creates a fire or explosion hazard in the Permittee's treatment works;
 - c) Causes corrosive structural damage to the Permittee's treatment works, including all wastes with a pH lower than 5.0;
 - d) Contains solid or viscous substances in amounts which would cause obstruction to the flow in sewers or other interference with proper operation of the Permittee's treatment works; or
 - e) In the case of a major contributing industry, as defined in this permit, contains an incompatible pollutant, as defined in this permit, in an amount or concentration in excess of that allowed under standards or guidelines issued from time to time pursuant to Sections 304, 306, or 307 of the Clean Water Act.
2. Require 45 days prior notification to the Permittee by any person or persons of a:
 - a) Proposed substantial change in volume or character of pollutants over that being discharged into the Permittee's treatment works at the time of issuance of this permit;

- b) Proposed new discharge into the Permittee's treatment works of pollutants from any source which would be a new source as defined in Section 306 of the Clean Water Act if such source were discharging pollutants; or
 - c) Proposed new discharge into the Permittee's treatment works of pollutants from any source which would be subject to Section 301 of the Clean Water Act if it were discharging such pollutants.
3. Require any industry discharging into the Permittee's treatment works to perform such monitoring of its discharge as the Permittee may reasonably require, including the installation, use, and maintenance of monitoring equipment and monitoring methods, keeping records of the results of such monitoring, and reporting the results of such monitoring to the Permittee. Such records shall be made available by the Permittee to the Secretary upon request.
4. Authorize the Permittee's authorized representatives to enter into, upon, or through the premises of any industry discharging into the Permittee's treatment works to have access to and copy any records, to inspect any monitoring equipment or method required under subsection 3 above, and to sample any discharge into the Permittee's treatment works.

II. GENERAL CONDITIONS

A. MANAGEMENT REQUIREMENTS

1. Facility Modification / Change in Discharge

All discharges authorized herein shall be consistent with the terms and conditions of this permit. The discharge of any pollutant more frequently than, or at a level in excess of, that identified and authorized by this permit shall constitute a violation of the terms and conditions of this permit. Such a violation may result in the imposition of civil and/or criminal penalties pursuant to 10 V.S.A. Chapters 47, 201, and 211. Any anticipated facility alterations or expansions or process modifications which will result in new, different, or increased discharges of any pollutants must be reported by submission of a new permit application or, if such changes will not violate the effluent limitations specified in this permit, by notice to the Secretary of such changes. Following such notice, the permit may be modified, pursuant to Condition II.B.4 of this permit, to specify and limit any pollutants not previously limited.

In addition, the Permittee, within 30 days of the date on which the Permittee is notified, shall provide notice to the Secretary of the following:

- a) Any new introduction of pollutants into the treatment works from a source which would be a new source as defined in Section 306 of the Clean Water Act if such source were discharging pollutants;
- b) Except for such categories and classes of point sources or discharges specified by the Secretary, any new introduction of pollutants into the treatment works from a source

which would be subject to Section 301 of the Clean Water Act if such source were discharging pollutants; and

- c) Any substantial change in volume or character of pollutants being introduced into the treatment works by a source introducing pollutants into such works at the time of issuance of the permit.

The notice shall include:

- i. The quality and quantity of the discharge to be introduced into the system, and
- ii. The anticipated impact of such change in the quality or quantity of the effluent to be discharged from the WWTF.

2. Noncompliance Notification

- a) The Permittee shall give advance notice to the Secretary of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.
- b) In the event the Permittee is unable to comply with any of the conditions of this permit due, among other reasons, to:
 - i. Breakdown or maintenance of waste treatment equipment (biological and physical-chemical systems including all pipes, transfer pumps, compressors, collection ponds or tanks for the segregation of treated or untreated wastes, ion exchange columns, or carbon absorption units);
 - ii. Accidents caused by human error or negligence;
 - iii. Any unanticipated bypass or upset which exceeds any effluent limitation in the permit;
 - iv. Violation of a maximum day discharge limitation for any of the pollutants listed by the Secretary in this permit; or
 - v. Other causes such as acts of nature,

the Permittee shall provide notice as specified in subdivisions (c) and (d) of this subsection.

- c) Pursuant to 10 V.S.A. § 1295, notice for “untreated discharges,” as defined.
 - i. Public notice. For “untreated discharges” an operator of a WWTF or the operator’s delegate shall as soon as possible, but no longer than one hour from discovery of an untreated discharge from the WWTF, post on a publicly accessible electronic network, mobile application, or other electronic media designated by the Secretary an alert informing the public of the untreated discharge and its location, except that

if the operator or his or her delegate does not have telephone or Internet service at the location where he or she is working to control or stop the untreated discharge, the operator or his or her delegate may delay posting the alert until the time that the untreated discharge is controlled or stopped, provided that the alert shall be posted no later than four hours from discovery of the untreated discharge.

- ii.** Secretary notification. For “untreated discharges” an operator of a WWTF shall within 12 hours from discovery of an untreated discharge from the WWTF notify the Secretary and the local health officer of the municipality where the facility is located of the untreated discharge. The operator shall notify the Secretary through use of the Department of Environmental Conservation’s online event reporting system. If, for any reason, the online event reporting system is not operable, the operator shall notify the Secretary via telephone or e-mail. The notification shall include:

 - (1)** The specific location of each untreated discharge, including the body of water affected. For combined sewer overflows, the specific location of each untreated discharge means each outfall that has discharges during the wet weather storm event.
 - (2)** Except for discharges from a WWTF to a separate storm sewer system, the date and approximate time the untreated discharge began.
 - (3)** The date and approximate time the untreated discharge ended. If the untreated discharge is still ongoing at the time of reporting, the entity reporting the untreated discharge shall amend the report with the date and approximate time the untreated discharge ended within three business days of the untreated discharge ending.
 - (4)** Except for discharges from a WWTF to a separate storm sewer system, the approximate total volume of sewage and, if applicable, stormwater that was released. If the approximate total volume is unknown at the time of reporting, the entity reporting the untreated discharge shall amend the report with the approximate total volume within three business days.
 - (5)** The cause of the untreated discharge and a brief description of the noncompliance, including the type of event and the type of sewer structure involved.
 - (6)** The person reporting the untreated discharge.
- d)** For any non-compliance not covered under Condition II.A.2.c. of this permit, an operator of a WWTF or the operator’s delegate shall notify the Secretary within 24 hours of becoming aware of such condition and shall provide the Secretary with the following information, in writing, within five days:

 - i.** Cause of non-compliance;

- ii. A description of the non-complying discharge including its impact upon the receiving water;
- iii. Anticipated time the condition of non-compliance is expected to continue or, if such condition has been corrected, the duration of the period of non-compliance;
- iv. Steps taken by the Permittee to reduce and eliminate the non-complying discharge; and
- v. Steps to be taken by the Permittee to prevent recurrence of the condition of non-compliance.

3. Operation and Maintenance

All waste collection, control, treatment, and disposal facilities shall be operated in a manner consistent with the following:

- a) The Permittee shall, at all times, maintain in good working order and operate as efficiently as possible all treatment and control facilities and systems (and related appurtenances) installed or used by the Permittee to achieve compliance with the terms and conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by the Permittee only when the operation is necessary to achieve compliance with the conditions of this permit.
- b) The Permittee shall provide an adequate operating staff which is duly qualified to carry out the operation, maintenance, and testing functions required to ensure compliance with the conditions of this permit; and
- c) The operation and maintenance of this facility shall be performed only by qualified personnel who are licensed as required by the Secretary and the Director of the Vermont Office of Professional Regulation.

4. Quality Control

The Permittee shall calibrate and perform maintenance procedures on all monitoring and analytical instrumentation at regular intervals to ensure accuracy of measurements, or shall ensure that both activities will be conducted.

The Permittee shall keep records of these activities and shall provide such records upon request of the Secretary.

The Permittee shall demonstrate the accuracy of the effluent flow measurement device **weekly** and report the results on the monthly report forms. The acceptable limit of error is $\pm 10\%$.

For purposes of demonstrating compliance with the requirements of Condition II.A.3.a) of this permit regarding adequate laboratory controls and appropriate quality assurance procedures, the Permittee shall conduct an annual laboratory proficiency test (via an accredited laboratory or as part of an EPA DMR-QA study) for the analysis of all pollutant parameters performed within their facility laboratory and reported as required by this permit. Results shall be submitted to the Secretary **by December 31, annually**.

5. Bypass

The bypass of facilities (including pump stations) is prohibited, except where authorized under the terms and conditions of an Emergency Pollution Permit issued pursuant to 10 V.S.A. § 1268. It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the activity in order to maintain compliance with the conditions of this permit.

6. Duty to Mitigate

The Permittee shall take all reasonable steps to minimize or prevent any adverse impact to waters of the State, the environment, or human health resulting from non-compliance with any condition specified in this permit, including accelerated or additional monitoring as necessary to determine the nature and impact of the non-complying discharge.

7. Records Retention

All records and information resulting from the monitoring activities required by this permit including all records of analyses performed, all calibration and maintenance of instrumentation records and all original chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit shall be retained for a minimum of three years, and shall be submitted to the Secretary upon request. This period shall be extended during the course of unresolved litigation regarding the discharge of pollutants or when requested by the Secretary.

8. Solids Management

Collected screenings, sludges, and other solids removed in the course of treatment and control of wastewaters shall be stored, treated, and disposed of in accordance with 10 V.S.A. Chapter 159 and with the terms and conditions of any certification, interim or final, transitional operation authorization, or order issued pursuant to 10 V.S.A. Chapter 159 that is in effect on the issuance date of this permit or is issued during the term of this permit.

9. Emergency Pollution Permits

Maintenance activities, or emergencies resulting from equipment failure or malfunction, including power outages, which result in an effluent which exceeds the effluent limitations specified herein, shall be considered a violation of the conditions of this permit, unless the Permittee's discharge is covered under an emergency pollution permit. The Permittee shall

notify the Secretary of the emergency situation by the next working day, unless notice is required sooner under Section II.A.2.

10 V.S.A. § 1268 reads as follows:

When a discharge permit holder finds that pollution abatement facilities require repairs, replacement or other corrective action in order for them to continue to meet standards specified in the permit, he may apply in the manner specified by the secretary for an emergency pollution permit for a term sufficient to effect repairs, replacements or other corrective action. The permit may be issued without prior public notice if the nature of the emergency will not provide sufficient time to give notice; provided that the secretary shall give public notice as soon as possible but in any event no later than five days after the issuance date of the emergency pollution permit. No emergency pollution permit shall be issued unless the applicant certifies and the secretary finds that:

- (1) there is no present, reasonable alternative means of disposing of the waste other than by discharging it into the waters of the State during the limited period of time of the emergency;
- (2) the denial of an emergency pollution permit would work an extreme hardship upon the applicant;
- (3) the granting of an emergency pollution permit will result in some public benefit;
- (4) the discharge will not be unreasonably harmful to the quality of the receiving waters;
- (5) the cause or reason for the emergency is not due to willful or intended acts or omissions of the applicant.

Application shall be made to the Secretary at the following address: Agency of Natural Resources, Department of Environmental Conservation, One National Life Drive, Main Building, 2nd Floor, Montpelier, VT 05620-3522.

B. RESPONSIBILITIES

1. Right of Entry

The Permittee shall allow the Secretary or authorized representative, upon the presentation of proper credentials:

- a) To enter upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
- b) To have access to and copy, at reasonable times, any records required to be kept under the terms and conditions of this permit;

- c) To inspect, at reasonable times, any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
- d) To sample or monitor, at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act, any substances or parameters at any location.

2. Transfer of Ownership or Control

This permit is not transferable without prior written approval of the Secretary. All application and operating fees must be paid in full prior to transfer of this permit. In the event of any change in control or ownership of facilities from which the authorized discharges emanate, the Permittee shall provide a copy of this permit to the succeeding owner or controller and shall send written notification of the change in ownership or control to the Secretary **at least 30 days in advance of the proposed transfer date**. The notice to the Secretary shall include a written agreement between the existing and new Permittees containing a specific date for transfer of permit responsibility, coverage, and liability between them. The Permittee shall also inform the prospective owner or operator of their responsibility to make an application for transfer of this permit.

This request for transfer application must include as a minimum:

- a) A properly completed application form provided by the Secretary and the applicable processing fee.
- b) A written statement from the prospective owner or operator certifying:
 - i. The conditions of the operation that contribute to, or affect, the discharge will not be materially different under the new ownership;
 - ii. The prospective owner or operator has read and is familiar with the terms of the permit and agrees to comply with all terms and conditions of the permit; and
 - iii. The prospective owner or operator has adequate funding to operate and maintain the treatment system and remain in compliance with the terms and conditions of the permit.
- c) The date of the sale or transfer.

The Secretary may require additional information dependent upon the current status of the facility operation, maintenance, and permit compliance.

3. Confidentiality

Pursuant to 10 V.S.A. § 1259(b):

Any records or information obtained under this permit program that constitutes trade secrets under 1 V.S.A. § 317(c)(9) shall be kept confidential, except that such records or information may be disclosed to authorized representatives of the State and the United States when relevant to any proceedings under this chapter.

Claims for confidentiality for the following information will be denied:

- a) The name and address of any permit applicant or Permittee.
- b) Permit applications, permits, and effluent data.
- c) Information required by application forms, including information submitted on the forms themselves and any attachments used to supply information required by the forms.

4. Permit Modification, Suspension, and Revocation

After notice and opportunity for a hearing, this permit may be modified, suspended, or revoked in whole or in part during its term for cause including the following:

- a) Violation of any terms or conditions of this permit;
- b) Obtaining this permit by misrepresentation or failure to disclose fully all relevant facts;
- c) Reallocation of the WLA under the LC TMDL;
- d) Development of an integrated WWTF and stormwater runoff NPDES permit; or
- e) A change in any condition that requires either a temporary or permanent reduction or elimination of the permitted discharge.

The filing of a request by the Permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance shall not stay any permit condition.

The Permittee shall provide to the Secretary, within a reasonable time, any information which the Secretary may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The Permittee shall also furnish to the Secretary upon request, copies of records required to be kept by this permit.

5. Toxic Effluent Standards

If a toxic effluent standard or prohibition (including any schedule of compliance specified in such effluent standard or prohibition) is established under section 307(a) of the Clean Water Act for a toxic pollutant which is present in the Permittee's discharge and such standard or prohibition is more stringent than any limitation upon such pollutant in this permit, then this permit shall be modified or revoked and reissued, pursuant to Condition

II.B.4 of this permit, in accordance with the toxic effluent standard or prohibition and the Permittee so notified.

6. Oil and Hazardous Substance Liability

Nothing in this permit shall be construed to preclude the institution of legal action or relieve the Permittee from any responsibilities, liabilities, or penalties to which the Permittee is or may be subject under 10 V.S.A. § 1281.

7. Other Materials

Other materials ordinarily produced or used in the operation of this facility, which have been specifically identified in the application, may be discharged at the maximum frequency and maximum level identified in the application, provided:

- a) They are not:
 - i. Designated as toxic or hazardous under provisions of Sections 307 and 311, respectively, of the Clean Water Act, or
 - ii. Known to be hazardous or toxic by the Permittee,

except that such materials indicated in (i) and (ii) above may be discharged in certain limited amounts with the written approval of, and under special conditions established by, the Secretary or his/her designated representative, if the substances will not pose any imminent hazard to the public health or safety;

- b) The discharge of such materials will not violate the Vermont Water Quality Standards; and
- c) The Permittee is not notified by the Secretary to eliminate or reduce the quantity of such materials entering the water.

8. Navigable Waters

This permit does not authorize or approve the construction of any onshore or offshore physical structures or facilities or the undertaking of any work in any navigable waters.

9. Civil and Criminal Liability

The Permittee shall comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Except as provided in "Bypass" (Condition II.A.5), and "Emergency Pollution Permits" (Condition II.A.9), nothing in this permit shall be construed to relieve the Permittee from civil or criminal penalties for noncompliance. Civil and criminal penalties for non-compliance are provided for in 10 V.S.A. Chapters 47, 201, and 211.

10. State Laws

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the Permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable state law or regulation under authority preserved by Section 510 of the Clean Water Act.

11. Property Rights

Issuance of this permit does not convey any property rights in either real or personal property, or any exclusive privileges, nor does it authorize any injury to private property or any invasion of personal rights, nor any infringement of federal, state, or local laws or regulations.

12. Other Information

If the Permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Secretary, it shall promptly submit such facts or information.

13. Severability

The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.

14. Authority

This permit is issued under authority of 10 V.S.A. §§ 1258 and 1259 of the Vermont Water Pollution Control Act, the Vermont Water Pollution Control Permit Regulation, and Section 402 of the Clean Water Act, as amended.

15. Definitions

For purposes of this permit, the following definitions shall apply.

Agency – means the Vermont Agency of Natural Resources.

Annual Average – means the highest allowable average of daily discharges calculated as the sum of all daily discharges (mg/L, lbs or gallons) measured during a calendar year divided by the number of daily discharges measured during that year.

Average – means the arithmetic means of values taken at the frequency required for each parameter over the specified period.

Bypass – means the intentional diversion of waste streams from any portion of the treatment facility.

The Clean Water Act – means the federal Clean Water Act, as amended (33 U.S.C. § 1251, *et seq.*).

Composite Sample – means a sample consisting of a minimum of one grab sample per hour collected during a 24-hour period (or lesser period as specified in the section on Monitoring and Reporting) and combined proportionally to flow over that same time period.

Daily Discharge – means the discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling.

For pollutants with limitations expressed in pounds the daily discharge is calculated as the total pounds of pollutants discharged over the day.

For pollutants with limitations expressed in mg/L the daily discharge is calculated as the average measurement of the pollutant over the day.

Discharge – means the placing, depositing, or emission of any wastes, directly or indirectly, into an injection well or into the waters of the State.

Grab Sample – means an individual sample collected in a period of less than 15 minutes.

Incompatible Substance – means any waste being discharged into the treatment works which interferes with, passes through without treatment, or is otherwise incompatible with said works or would have a substantial adverse effect on the works or on water quality. This includes all pollutants required to be regulated under the Clean Water Act.

Instantaneous Maximum – means a value not to be exceeded in any grab sample.

Major Contributing Industry – means one that: (1) has a flow of 50,000 gallons or more per average work day; (2) has a flow greater than five percent of the flow carried by the municipal system receiving the waste; (3) has in its wastes a toxic pollutant in toxic amounts as defined in standards issued under Section 307(a) of the Clean Water Act; or (4) has a significant impact, either singly or in combination with other contributing industries, on a treatment works or on the quality of effluent from that treatment works.

Maximum Day (maximum daily discharge limitation) – means the highest allowable “daily discharge” (mg/L, lbs. or gallons).

Mean – is the arithmetic mean.

Monthly Average (average monthly discharge limitation) – means the highest allowable average of daily discharges (mg/L, lbs or gallons) over a calendar month, calculated as the sum of all daily discharges (mg/L, lbs or gallons) measured during a calendar month divided by the number of daily discharges measured during that month.

NPDES – means the National Pollutant Discharge Elimination System.

Secretary – means the Secretary of the Agency of Natural Resources or the Secretary’s duly authorized representative.

Septage – means the liquid and solid material pumped from a septic tank, cesspool, or similar domestic sewage treatment system, or a holding tank when the system is cleaned or maintained.

Untreated Discharge – means (1) combined sewer overflows from a WWTF; (2) overflows from sanitary sewers and combined sewer systems that are part of a WWTF during dry weather flows, which result in a discharge to waters of the State; (3) upsets or bypasses around or within a WWTF during dry or wet weather conditions that are due to factors unrelated to a wet weather storm event and that result in a discharge of sewage that has not been fully treated to waters of the State; and (4) discharges from a WWTF to separate storm sewer systems.

Waste – means effluent, sewage or any substance or material, liquid, gaseous, solid or radioactive, including heated liquids, whether or not harmful or deleterious to waters, provided however, the term “sewage” as used in this permit shall not include the rinse or process water from a cheese manufacturing process.

Waste Management Zone – means a specific reach of Class B(1) or B(2) waters designated by a permit to accept the discharge of properly treated wastes that prior to treatment contained organisms pathogenic to human beings. Throughout the receiving waters, water quality criteria must be achieved but increased health risks exist in a waste management zone due to the authorized discharge.

Waters includes all rivers, streams, creeks, brooks, reservoirs, ponds, lakes, springs, and all bodies of surface waters, artificial or natural, which are contained within, flow through, or border upon the State or any portion of it.

Weekly Average – (average weekly discharge limitation) – means the highest allowable average of daily discharges (mg/L, lbs or gallons) over a calendar week, calculated as the sum of all daily discharges (mg/L, lbs or gallons) measured during a calendar week divided by the number of daily discharges measured during that week.

Whole Effluent Toxicity (WET) – means the aggregate toxic effect of an effluent measured directly by a toxicity test.

WWTF or wastewater treatment facility shall have the same meaning as “pollution abatement facilities,” as defined under 10 V.S.A. § 1251, which means municipal sewage treatment plants, pumping stations, interceptor and outfall sewers, and attendant facilities as prescribed by the Department to abate pollution of the waters of the State.

ATTACHMENT A

Hardness (of receiving water, upstream of outfall)

Metals (total recoverable), cyanide and total phenols:

Antimony
Arsenic
Beryllium
Cadmium
Copper
Lead
Mercury
Nickel
Selenium
Silver
Thallium
Zinc
Cyanide
Total phenolic compounds

Volatile organic compounds:

acrolein
acrylonitrile
benzene
bromoform
carbon tetrachloride
chlorobenzene
chlorodibromomethane
chloroethane
2-chloroethylvinyl ether
chloroform
dichlorobromomethane
1,1-dichloroethane
1,2-dichloroethane
Trans-1,2-dichloroethylene
1,1-dichloroethylene
1,2-dichloropropane
1,3-dichloropropylene
ethylbenzene
methyl bromide
methyl chloride
methylene chloride
1,1,2,2-tetrachloroethane
tetrachloroethylene
toluene
1,1,1-trichloroethane
1,1,2-trichloroethane
trichloroethylene
vinyl chloride

Acid-extractable compounds:

p-chloro-m-cresol
2-chlorophenol
2,4-dimethylphenol
4,6-dinitro-o-cresol
2,4-dinitrophenol

2-nitrophenol
4-nitrophenol
pentachlorophenol
phenol
2,4,6-trichlorophenol

Base-neutral compounds:

acenaphthene
acenaphthylene
anthracene
benzidine
benzo(a)anthracene
benzo(a)pyrene
3,4-benzofluoranthene
benzo(ghi)perylene
benzo(k)fluoranthene
bis(2-chloroethoxy)methane
bis(2-chloroethyl)ether
bis(2-chloroisopropyl)ether
bis(2-ethylhexyl)phthalate
4-bromophenyl phenyl ether
butyl benzyl phthalate
2-chloronaphthalene
4-chlorophenyl phenyl ether
chrysene
di-n-butyl phthalate
di-n-octyl phthalate
dibenzo(a,h)anthracene
1,2-dichlorobenzene
1,3-dichlorobenzene
1,4-dichlorobenzene
3,3'-dichlorobenzidine
diethyl phthalate
dimethyl phthalate
2,4-dinitrotoluene
2,6-dinitrotoluene
1,2-diphenylhydrazine
fluoranthene
fluorene
hexachlorobenzene
hexachlorobutadiene
hexachlorocyclo-pentadiene
hexachloroethane
indeno(1,2,3-cd)pyrene
isophorone
naphthalene
nitrobenzene
N-nitrosodi-n-propylamine
N-nitrosodimethylamine
N-nitrosodiphenylamine
phenanthrene
pyrene
1,2,4-trichlorobenzene

**AGENCY OF NATURAL RESOURCES
DEPARTMENT OF ENVIRONMENTAL CONSERVATION
WATERSHED MANAGEMENT DIVISION
ONE NATIONAL LIFE DRIVE, MAIN BUILDING, 2ND FLOOR
MONTPELIER, VT 05620-3522**

**FACT SHEET FOR DRAFT PERMIT
(June 2017)**

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT TO DISCHARGE TO WATERS OF THE STATE

PERMIT NO: 3-1284
PIN: EJ95-0299
NPDES NO: VT0100358

NAME AND ADDRESS OF APPLICANT:

City of South Burlington
575 Dorset Street
South Burlington, VT 05403

NAME AND ADDRESS OF FACILITY WHERE DISCHARGE OCCURS:

City of South Burlington "Bartlett Bay" Wastewater Treatment Facility
Bartlett Bay Road
South Burlington, Vermont

RECEIVING WATER: Lake Champlain

CLASSIFICATION OF USES OF RECEIVING WATER: All uses Class B(2) with a waste management zone (WMZ). Class B(2) waters are suitable for swimming and other primary contact recreation; irrigation and agricultural uses; aquatic biota and aquatic habitat; good aesthetic value; boating, fishing, and other recreational uses and suitable for public water source with filtration and disinfection or other required treatment. A WMZ is a specific reach of Class B(1) or B(2) waters designated by a permit to accept the discharge of properly treated wastes that prior to treatment contained organisms pathogenic to human beings.

I. Proposed Action, Type of Facility, and Discharge Location

The Secretary of the Vermont Agency of Natural Resources (Secretary) received a renewal application for the permit to discharge into the designated receiving water from the above-named applicant on June 25, 2010. The Town's previous permit was issued on January 1, 2006. The previous permit (hereafter referred to as the "current permit") has been administratively continued, pursuant to 3 V.S.A. § 814, as the applicant filed a complete application for permit reissuance within the prescribed time period as per the Vermont Water Pollution Control Permit Regulations (VWPCPR) § 13.5(b). At this time the Secretary

AGENCY OF NATURAL RESOURCES
DEPARTMENT OF ENVIRONMENTAL CONSERVATION
WATERSHED MANAGEMENT DIVISION
1 NATIONAL LIFE DRIVE – MAIN 2
MONTPELIER, VERMONT 05620-3522

NOTICE: DRAFT DISCHARGE PERMIT
PUBLIC NOTICE NUMBER: 3-1284
PUBLIC COMMENT PERIOD: May 31 – July 6, 2017
PUBLIC HEARING DATE: July 6, 2017, 2:00 – 4:00 PM, South Burlington City Hall

PERMITTEE INFORMATION

PERMITTEE NAME: City of South Burlington
PERMITTEE ADDRESS: 575 Dorset Street
South Burlington, Vermont 05403
PERMIT NUMBER: 3-1284
PROJECT ID NUMBER: EJ95-0299

DISCHARGE INFORMATION

NATURE: Municipal wastewater including domestic, commercial, and industrial wastewaters.
VOLUME: 1.250 MGD
RECEIVING WATER: Lake Champlain
EXPIRATION DATE: June 30, 2022
DESCRIPTION: This is a draft discharge permit proposed for issuance to the City of Burlington for the discharge of municipal wastewater from the Bartlett Bay Wastewater Treatment Facility on Bartlett Bay Road to Lake Champlain. This is a renewal and modification of an existing permit.

TENTATIVE DETERMINATIONS

Tentative determinations regarding effluent limitations and other conditions to be imposed on the pending Vermont permit have been made by the State of Vermont Agency of Natural Resources (VANR). The

limitations imposed will assure that the Vermont Water Quality Standards and applicable provisions of the Federal Clean Water Act, PL 92-500, as amended, will be met.

FURTHER INFORMATION

The complete application, proposed permit, and other information are on file and may be inspected by appointment on the 2nd floor of the Main Building at 1 National Life Drive, Montpelier, Vermont. Copies, obtained by calling 802-828-1535 from 7:45 AM to 4:30 PM Monday through Friday, will be made at a cost based upon the current Secretary of State Official Fee Schedule for Copying Public Records. The draft permit and fact sheet may also be viewed on the Division's website at <http://dec.vermont.gov/watershed/wastewater/public-notices--fact-sheets--draft-permits>.

PUBLIC COMMENTS/PUBLIC HEARINGS

Written public comments on the proposed permit are invited and must be received on or before the close of the business day (4:30 pm) on **July 6, 2017** to the Agency of Natural Resources, Department of Environmental Conservation, Watershed Management Division, 1 National Life Drive – Main 2, Vermont 05620-3522. Comments may also be submitted by e-mail using the e-mail comment provisions included at <http://dec.vermont.gov/watershed/wastewater/public-notices--fact-sheets--draft-permits>. All comments received by the above date will be considered in formulation of the final determinations.

The Secretary will hold a public hearing on **Thursday, July 6, 2:00 – 4:00 PM** in the Green Mountain Room, City of South Burlington City Hall, 575 Dorset Street, South Burlington, Vermont 05403.

FINAL ACTION/RIGHTS TO APPEAL TO THE ENVIRONMENTAL COURT

At the conclusion of the public notice period and after consideration of additional information received during the public notice period, VANR will make a final determination to issue or to deny the permit. Pursuant to 10 V.S.A. Chapter 220, any appeal of this decision must be filed with the clerk of the Environmental Court within 30 days of the date of the decision. The appellant must submit the Notice of Appeal and include the applicable filing fee, payable to the state of Vermont.

The Notice of Appeal must specify the parties taking the appeal and the statutory provision under which each party claims party status; must designate the act or decision appealed from; must name the Environmental Court; and must be signed by the appellant or their attorney. In addition, the appeal must give the address or location and the description of the property, project or facility with which the appeal is concerned and the name of the applicant or any permit involved in the appeal.

The appellant must also serve a copy of the Notice of Appeal in accordance with Rule 5(b)(4)(B) of the Vermont Rules for Environmental Court Proceedings.

The address for the Vermont Environmental Court is: Vermont Superior Court, Environmental Division, 32 Cherry Street, 2nd Floor, Suite 303, Burlington VT 05401 (Tel. (802) 951-1740). For further information, see the Vermont Rules for Environmental Court Proceedings, available online at www.vermontjudiciary.org.

Emily Boedecker, Commissioner
Department of Environmental Conservation

has made a tentative decision to reissue the discharge permit. The facility is engaged in the treatment of municipal wastewater including domestic, commercial, and industrial wastewaters. The discharge is from the outfall of the City of South Burlington “Bartlett Bay” Wastewater Treatment Facility (WWTF) to Lake Champlain.

A map showing the location of the facility, outfall, and receiving water is provided in the Reasonable Potential Determination (RPD) (see Attachment A).

II. Description of Discharge

The facility is engaged in the treatment of municipal wastewater including domestic, commercial, and industrial wastewaters. The WWTF is a Kruger A/O (Anaerobic/Oxic) extended aeration activated sludge process. The design flow of the facility is 1.250 million gallons per day (MGD) and the design biochemical oxygen demand (BOD₅) loading is 310 mg/L (3,232 pounds/day).

The WWTF maintains a constant discharge to Lake Champlain.

III. Limitations and Monitoring Requirements

The draft permit contains limitations for effluent flow, BOD₅, total suspended solids (TSS), total phosphorus (TP), settleable solids, *Escherichia coli*, and pH. It also contains monitoring requirements for total nitrogen (TN), Total Kjeldahl Nitrogen (TKN), and nitrate/nitrite (NO_x). The effluent limitations of the draft permit and the monitoring requirements may be found on the following pages of the draft permit:

Effluent Limitations:	Page 2-3 of 26
Monitoring Requirements:	Pages 7-9 of 26

IV. Statutory and Regulatory Authority

A. Clean Water Act and NPDES Background

Congress enacted the Clean Water Act (CWA or Act), “to restore and maintain the chemical, physical, and biological integrity of the Nation’s waters.” CWA § 101(a). To achieve this objective, the CWA makes it unlawful for any person to discharge any pollutant into the waters of the United States from any point source, except as authorized by specified permitting sections of the Act, one of which is Section 402. CWA §§ 301(a), 402(a). Section 402 establishes one of the CWA’s principal permitting programs, the National Pollutant Discharge Elimination System (NPDES). Under this section of the Act, the U.S. Environmental Protection Agency (EPA) may “issue a permit for the discharge of any pollutant, or combination of pollutants” in accordance with certain conditions. CWA § 402(a). The State of Vermont has been delegated by the EPA to administer the NPDES Program in Vermont. NPDES permits generally contain discharge limitations and establish related monitoring and reporting requirements. CWA § 402(a)(1) - (2).

Section 301 of the CWA provides for two types of effluent limitations to be included in NPDES permits: “technology-based” limitations and “water quality-based” limitations. CWA §§ 301, 303, 304(b); 40 Code of Federal Regulations (C.F.R.) Parts 122, 125, 131. Technology-based limitations, generally developed on an industry-by-industry basis, reflect a specified level of pollutant-reducing technology available and economically achievable for the type of facility being

permitted. CWA § 301(b). As a class, WWTFs must meet performance-based requirements based on available wastewater treatment technology. CWA § 301(b)(1)(B). The performance level for WWTFs is referred to as “secondary treatment.” Secondary treatment is comprised of technology-based requirements expressed in terms of BOD₅, TSS, and pH. 40 C.F.R. Part 133.

Water quality-based effluent limits, on the other hand, are designed to ensure that state water quality standards are achieved, irrespective of the technological or economic considerations that inform technology-based limits. Under the CWA, states must develop water quality standards for all water bodies within the state. CWA § 303. These standards have three parts: (1) one or more “designated uses” for each water body or water body segment in the state; (2) water quality “criteria,” consisting of numerical concentration levels and/or narrative statements specifying the amounts of various pollutants that may be present in each water body without impairing the designated uses of that water body; and (3) an antidegradation provision, focused on protecting high quality waters and protecting and maintaining water quality necessary to protect existing uses. CWA § 303(c)(2)(A); 40 C.F.R. § 131.12. The applicable water quality standards for this permit are the 2017 Vermont Water Quality Standards (Environmental Protection Rule, Chapter 29a).

A permit must include limits for any pollutant or pollutant parameter (conventional, non-conventional, toxic, and whole effluent toxicity) that is or may be discharged at a level that causes or has “reasonable potential” to cause or contribute to an excursion above any water quality standard, including narrative water quality criteria. See 40 C.F.R. § 122.44(d)(1). An excursion occurs if the projected or actual instream concentration exceeds the applicable criterion. A NPDES permit must contain effluent limitations and conditions in order to ensure that the discharge does not cause or contribute to water quality standard violations.

Receiving stream requirements are established according to numerical and narrative standards adopted under state law for each stream classification. When using chemical-specific numeric criteria from the State’s water quality standards to develop permit limits, both the acute and chronic aquatic life criteria are used and expressed in terms of maximum allowable in stream pollutant concentrations. Acute aquatic life criteria are generally implemented through maximum daily limits and chronic aquatic life criteria are generally implemented through average monthly limits.

Where a state has not established a numeric water quality criterion for a specific chemical pollutant that is present in the effluent in a concentration that causes or has a reasonable potential to cause a violation of narrative water quality standards, the permitting authority must establish effluent limits in one of three ways: based on a “calculated numeric criterion for the pollutant which the permitting authority demonstrates will attain and maintain applicable narrative water quality criteria and fully protect the designated use”; on a “case-by-case basis” using CWA Section 304(a) recommended water quality criteria, supplemented as necessary by other relevant information; or, in certain circumstances, based on an “indicator parameter.” 40 C.F.R. § 122.44(d)(1)(vi)(A-C).

The state rules governing Vermont’s NPDES permit program are found in the Vermont Water Pollution Control Permit Regulations (Environmental Protection Rule, Chapter 13).

1. Reasonable Potential Determination

In determining whether this permit has the reasonable potential to cause or contribute to an impairment, Vermont has considered:

- 1) Existing controls on point and non-point sources of pollution as evidenced by the Vermont surface water assessment database;
- 2) Pollutant concentration and variability in the effluent as determined from the permit application materials, monthly discharge monitoring reports (DMRs), or other facility reports;
- 3) Receiving water quality based on targeted water quality and biological assessments of receiving waters, as applicable, or other State or Federal water quality reports;
- 4) Toxicity testing results based on the Vermont Toxics Control Discharge Strategy, and compelled as a condition of prior permits;
- 5) Available dilution of the effluent in the receiving water, expressed as the instream waste concentration. In accordance with the applicable Vermont Water Quality Standards, available dilution for rivers and streams is based on a known or estimated value of the lowest average flow which occurs for seven (7) consecutive days with a recurrence interval of once in ten (10) years (7Q10) for aquatic life and human health criteria for non-carcinogens, or at all flows for human health (carcinogens only) in the receiving water. For nutrients, available dilution for stream and river discharges is assessed using the low median monthly flow computed as the median flow of the month containing the lowest annual flow. Available dilution for lakes is based on mixing zones of no more than 200 feet in diameter, in any direction, from the effluent discharge point, including as applicable the length of a diffuser apparatus.
- 6) All effluent limitations, monitoring requirements, and other conditions of the proposed draft permit.

The Reasonable Potential Determination for this facility is attached to this Fact Sheet as Attachment A.

B. Anti-Backsliding

Section 402(o) of the CWA provides that certain effluent limitations of a renewed, reissued, or modified permit must be at least as stringent as the comparable effluent limitations in the current permit. EPA has also promulgated anti-backsliding regulations which are found at 40 C.F.R. § 122.44(l). Unless applicable anti-backsliding exemptions are met, the limits and conditions in the reissued permit must be at least as stringent as those in the current permit.

V. Description of Receiving Water

The receiving water for this discharge is Lake Champlain, a designated Warm Water Fish Habitat June 1 – September 30, and a designated Cold Water Fish Habitat October 1 – May 31. Lake Champlain is impaired for phosphorus and is subject to a Total Maximum Daily Load (TMDL) for phosphorus. This is discussed further in Section VII.C.1. of this Fact Sheet.

VI. Facility History and Background

The City of South Burlington owns and operates the Bartlett Bay WWTF. The facility provides wastewater treatment capacity for residential, commercial, and industrial properties within its sewer service area in the City. The secondary WWTF with an extended aeration activated sludge process was completed in 1970. The facility was upgraded to a Kruger A/O (Anaerobic/Oxic) extended aeration activated sludge process with ultraviolet disinfection and cloth media disk filters for phosphorus removal in 1999.

The outfall pipe invert elevation is 15.9 feet below a lake level of 93.0 feet. The effluent outfall pipe is approximately 886 feet in length with an approximate 109-foot diffuser section with four equally spaced 8-inch diameter ports. The available lake to effluent dilution ratio of 33:1 at the outfall was determined in the 1997 Phase II Diffuser Design and Mixing Study report prepared by Binkerd Environmental.

VII. Permit Basis and Explanation of Effluent Limitation Derivation

This permit was evaluated under the 2017 Vermont Water Quality Standards.

A. Flow

The draft permit maintains the annual average flow limitation of 1.250 MGD. This facility maintains a constant discharge. Continuous flow monitoring is required.

B. Conventional Pollutants

1. Biochemical Oxygen Demand (BOD₅)

The effluent limitations for BOD₅ remain unchanged from the current permit. The monthly average (30 mg/L) and weekly average (45 mg/L) reflect the minimum level of effluent quality specified for secondary treatment in 40 CFR § 133.102. In addition, the draft permit contains a 50 mg/L, maximum day, BOD₅ limitation. This is the Agency standard applied to all such discharges pursuant to 13.4(c) of the Vermont Water Pollution Control Permit Regulations. The Secretary implements the limit to supplement the federal technology-based limitations to prevent a gross one-day permit effluent violation to be offset by multiple weekly and monthly sampling events which would enable a discharger to comply with the weekly average and monthly average permit limitations. Mass limitations (175 lbs/day, monthly average and 263 lbs/day, weekly average) are calculated using the concentration limitations above and the originally permitted flow from the WWTF of 0.7 MGD and the provisions of 10 V.S.A. §1252(h). The BOD₅ weekly monitoring requirement is unchanged from the current permit.

2. Total Suspended Solids (TSS)

The effluent limitations for TSS remain unchanged from the current permit. The monthly average (30 mg/L) and weekly average (45 mg/L) reflect the minimum level of effluent quality specified for secondary treatment in 40 C.F.R. § 133.102. In addition, the draft permit contains a 50 mg/L, maximum day, TSS limitation. This is the Agency standard applied to all such discharges pursuant to 13.4(c) of the Vermont Water Pollution Control Permit Regulations. The Secretary

implements the limit to supplement the federal technology-based limitations to prevent a gross one-day permit effluent violation to be offset by multiple weekly and monthly sampling events which would enable a discharger to comply with the weekly average and monthly average permit limitations. Mass limitations (175 lbs/day, monthly average and 263 lbs/day, weekly average) are calculated using the concentration limitations above and the originally permitted flow from the WWTF of 0.7 MGD and the provisions of 10 V.S.A. § 1252(h). The TSS weekly monitoring requirement is unchanged from the current permit.

3. *Escherichia coli*

The *E. coli* limitation is 77 colonies/100 ml, instantaneous maximum and is based upon the limitation in the current permit and the anti-backsliding provisions of Section 402(o) of the CWA. As in the current permit, weekly monitoring is required.

4. pH

The pH limitation remains at 6.5 - 8.5 Standard Units as specified in Section 29A-303(6) in the Vermont Water Quality Standards. Monitoring remains at daily.

C. Non-Conventional and Toxics

1. Total Phosphorus (TP)

Background:

Excess phosphorus entering Lake Champlain from a variety of sources has impaired the water quality of the Lake. The Lake Champlain Total Maximum Daily Load (LC TMDL), places a cap on the maximum amount of phosphorus from point and non-point sources that is allowed to flow into the Lake while still meeting Vermont's water quality standards. The EPA developed phosphorus TMDLs for the 12 Vermont segments of Lake Champlain in collaboration with the Vermont Agency of Natural Resources, Department of Environmental Conservation, and the Vermont Agency of Agriculture, Food, and Markets, and released the document titled "Phosphorus TMDLs for Vermont Segments of Lake Champlain" (June 2016). The 2016 LC TMDL specifies allowable phosphorus loads, or waste load allocations (WLA), expressed as metric tons per year (mt/yr), for each of the 59 WWTFs that discharge to the Lake's watershed. Discharge NPDES permits will be issued by the Secretary in accordance with the permit issuance schedule in the Lake Champlain TMDL Phase 1 Implementation Plan (Chapter 3, page 46). The Secretary will follow this schedule unless special circumstances are raised by the facility that warrant the issuance of the permit sooner (e.g., planned facility upgrades), and the Program has sufficient staff capacity to handle the request.

Reductions in WLAs are targeted only to WWTFs in those lake segment watersheds where the currently permitted wastewater load represents a significant (defined as being 10% or greater) portion of the TP load to that segment from all sources (Main Lake, Shelburne Bay, Burlington Bay, St. Albans Bay) or where wastewater upgrades would meaningfully reduce the phosphorus reduction burden placed on non-wastewater (non-point) sources (Missisquoi Bay). Therefore, WWTFs discharging to the Port Henry, Otter Creek, Mallets Bay, Northeast Arm, Isle LaMotte, and the South Lake A/B lake segments were not assigned a new WLA. The EPA also determined

that WWTFs with a design flow of < 0.1 MGD would be given the same allocations as in the 2002 TMDLs due their minor contribution of phosphorus loading.

The LC TMDL establishes new annual WLAs for WWTFs with a design flow capacity of above 0.1 MGD that discharge to the Main Lake, Shelburne Bay, Burlington Bay, St. Albans Bay, and Missisquoi Bay lake segments. Specifically, WWTFs with a design flow capacity of 0.1 to 0.2 MGD were assigned WLAs based on a 0.8 mg/L effluent phosphorus concentration at permitted flow while WWTFs with design capacity of > 0.2 MGD were assigned a WLA based on a 0.2 mg/L effluent phosphorus concentration at permitted flow.

In the LC TMDL, EPA acknowledged and supported the Secretary's commitment to employ flexible approaches to implementing the WWTF WLAs including "providing a period of time for optimization to be pursued and the corresponding load reduction results to be realized, and then commencement of the process to upgrade phosphorus treatment facilities will be required when actual phosphorus loads reach 80% of the LC TMDL limits." The Wastewater Management Program maintains a tracking system for phosphorus loading from Vermont WWTFs so facilities approaching or over the 80% threshold can be identified. The 80% phosphorus load threshold is calculated by comparing the individual WWTF phosphorus WLA established in the LC TMDL to the actual phosphorus discharge load from the WWTF over last 12 months:

WWTF Annual TP Load / LC TMDL WLA x 100

There are currently WWTFs in the Lake Champlain watershed with existing discharged loads of phosphorus already at, or above, 80% of allowable loads. To ensure facilities are operating as efficiently as possible, all reissued wastewater discharge NPDES permits under the LC TMDL will specify a period of 12 months for optimization to be pursued and the corresponding load reduction results to be realized, prior to evaluating where a facility ranks relative to the 80% trigger. Discharge permits will specify that after the optimization period, when an existing facility reaches 80% of its WLA for phosphorus (evaluated as a rolling, 12-month load), the Permittee will have to develop and submit a projection of whether the facility will exceed its WLA during the permit term and if it is projected to do so, then the facility will be required to develop a Phosphorus Elimination/Reduction Plan (PERP) that will ensure the facility continues to comply with its WLA.

Effluent TP limits in permits are expressed as total annual mass loads for facilities that currently have an existing monthly effluent concentration limits for TP in their NPDES permit.

Phosphorus Limit in Draft Permit:

The current discharge permit for this facility included a mass-based, effluent limit of 1,935 pounds of TP per year. This annual mass limitation was based on an allocation of 0.878 metric tons established in the 2002 LC TMDL. The current permit also contained an effluent TP concentration limit of 0.8 mg/L, monthly average, consistent with the annual load limit.

This proposed draft discharge permit contains a phosphorus effluent concentration limit of 0.8 mg/l, monthly average, and a mass effluent limit of 760 total pounds, annual limitation. The concentration effluent limitation is based on the requirements of 10 V.S.A. § 1266a and is unchanged from the current permit. The mass annual effluent limitation is based on the LC

TMDLs. The LC TMDL allocated 0.345 metric tons per year or 760 pounds per year to the Bartlett Bay WWTF. The Agency is adopting the WLA from the LC TMDL as the water quality-based effluent limitation for this permit without additional analysis because this WLA was set by the EPA less than a year ago as the limit necessary to ensure Lake Champlain is brought into compliance with the Vermont Water Quality Standards, and undertaking further analysis to determine if more stringent effluent limitations are needed would be meaningless at this time since the State has just started to implement the Vermont Lake Champlain Phosphorus TMDL Phase I Implementation Plan. *See In re Montpelier WWTF Discharge Permit, 2009 WL 4396740, 6 (Vt. Env'tl. Ct. June 30, 2009).*

This new, annual WLA represents a 61% reduction (-1,175 pounds) from the currently permitted WLA and is equivalent to setting the effluent TP limit at 0.2 mg/L at the design capacity of the WWTF (1.250 MGD). To convert units of the WLA from metric tons to pounds for the annual, mass-based TP permit limit, the following equation was used and the resulting WLA was rounded down to the nearest pound:

$$(0.345 \text{ mt/yr}) (2204.62 \text{ lbs/mt}) = 760 \text{ lbs/yr}$$

The LC TMDL includes WLAs for WWTFs expressed as total annual mass loads; the LC TMDL does not include monthly average concentration effluent limits for WWTFs. State law (10 V.S.A. § 1266a) requires that, “No person directly discharging into the drainage basins of Lake Champlain or Lake Memphremagog shall discharge any waste that contains a phosphorus concentration in excess of 0.80 milligrams per liter on a monthly average basis.” Therefore, in addition to the annual mass load effluent limitation required by the LC TMDL, the permit must also include a monthly average concentration limit for phosphorus. While the WLA in the LC TMDL was calculated based on a TP effluent concentration of 0.20 mg/L, the permit does not include 0.20 mg/L as the concentration effluent limitation because a permittee may not need to achieve 0.20 mg/L to ensure compliance with the WLA established in the LC TMDL. Rather the permit includes a monthly average concentration limit for phosphorus of 0.80 mg/L to ensure compliance with state law and to recognize seasonal variations in the facility’s discharge. It is important to note that because the annual mass load and average monthly concentration limits are not mathematically consistent in the permit, meeting a 0.8 mg/L concentration limit at design flows will not result in meeting the annual mass limit.

The Permittee must comply with both limitations and, as required by the permit, must operate the facility to meet the more restrictive limitation, which may vary depending upon discharge flows at the facility. If the facility is operating at design flows, the annual mass load limitation will be the more restrictive limitation. However, if the facility is operating at low flows, the monthly average concentration limit may be the more restrictive limitation.

The requirement for weekly sampling for TP is unchanged from the current permit.

Condition I.G.5 of this draft permit requires the submission of monitoring reports to the Secretary specific to tracking TP in the discharge. Monthly reporting of total pounds of phosphorus discharged for the year shall be submitted via self-monitoring report from WR-43-P04. A report that documents the annual TP discharged from the facility, summarizes phosphorus removal optimization and efficiencies, and tracks trends relative to the previous year shall be attached to

the December WR-43 form. The annual and monthly TP loads discharged from the facility shall also be reported electronically with other required parameters.

Phosphorus Optimization and Elimination/Reduction Plans:

To ensure the facility is operating as efficiently as possible for purposes of phosphorus removal, Condition I.B.2 of the draft permit requires that within 120 days of permit issuance, the Permittee shall develop or update (as appropriate), and submit to the Secretary, a Phosphorus Optimization Plan (POP) to increase the WWTF's phosphorus removal efficiency by implementing optimization techniques that achieve phosphorus reductions using primarily existing facilities and equipment. The techniques to be evaluated may include operational process changes to enhance biological and/or chemical phosphorous removal, incorporation of anaerobic/anoxic zones, septage receiving policies and procedures, and side stream management.

The facility shall have 12 months from the permit issuance date to optimize removal of TP. If, after the 12-month optimization period, the WWTF's actual TP loads reach or exceed 80% of the LC TMDL WLA for the WWTF, based on the WWTF's 12-month running annual load calculated using the phosphorus load calculation (Condition I.B.3 of the draft permit) the Permittee shall, within 90 days of reaching or exceeding 80% of the LC TMDL WLA for the WWTF, develop and submit to the Secretary a projection based on the WWTF's current operations and expected future loadings of whether it will exceed its WLA during the permit term.

If the facility is not projected to exceed its WLA within the permit term, the WWTF shall reassess when it is projected to reach its WLA prior to permit renewal and submit that information with its next permit application. If the facility is projected to exceed its WLA during the permit term, the Permittee shall submit a Phosphorus Elimination/Reduction Plan (PERP) within 6 months to the Secretary to ensure the WWTF continues to comply with its WLA. The PERP shall be treated as an application to amend the permit, and therefore, shall be subject to all public notice, hearing, and comment provisions, in place at the time the plan is submitted, that are applicable to permit amendments. The WWTF shall revise the PERP, if required by the Secretary.

2. Total Nitrogen (TN)

To gather data on the amount of Nitrate/Nitrite (NO_x) and Total Nitrogen (TN) in this discharge and its potential impact on the receiving water, a monthly "monitor only" requirement for NO_x and TN has been included in this permit. TN is a calculated value based on the sum of Total Kjeldahl Nitrogen (TKN) and NO_x Nitrogen, and, shall be reported as pounds, calculated as:

$$\text{Average TN (mg/L)} \times \text{Total Daily Flow} \times 8.34$$

$$\text{where, TN (mg/L)} = \text{TKN (mg/L)} + \text{NO}_x \text{ (mg/L)}$$

Per EPA, excess nitrogen (N) and phosphorus (P) are the leading cause of water quality degradation in the United States. Historically, nutrient management focused on limiting a single nutrient—P or N—based on assumptions that production is usually phosphorus limited in freshwater and N limited in marine waters. Scientific research demonstrates this is an overly simplistic model. The evidence clearly indicates management of both P and N is necessary to protect water quality. The literature shows that aquatic flora and fauna have differing nutrient

needs, some are P dependent, others N dependent and others are co-dependent on these two nutrients.

Like P, N promotes noxious aquatic plant and algal growth. High concentrations of P and N together cause greater growth of algae than P alone. The relative abundance of these nutrients also influences the type of species within the community. Furthermore, a high N-to-P ratio may exacerbate the growth of cyanobacteria, while elevated levels of N increase toxicity in some cyanobacteria species. Given the dynamic nature of all aquatic ecosystems, for the State to fully understand the degradation to water quality it is necessary to limit P and monitor bioavailable N (including nitrate, ammonium, and certain dissolved organic nitrogen compounds).

Facilities with design flow greater than 1 MGD will complete monthly monitoring unless more frequent sampling is already required by the permit. Facilities with design flows less than 1 MGD will complete quarterly, unless more frequent sampling is already required by the permit.

For more information, see

<https://www.epa.gov/sites/production/files/documents/nandpfactsheet.pdf>

Monthly monitoring via composite sample is required for this facility.

3. Settleable Solids

The settleable solids limitation of 1.0 mL/L instantaneous maximum and daily monitoring remain unchanged from the current permit. This numeric limit was established in support of the narrative standard in Section 29A-303(2) of the Vermont Water Quality Standards.

4. Toxicity Testing

40 CFR §§ 122.44(d)(1) and 122.21(j) require the Secretary to assess whether the discharge causes, or has the reasonable potential to cause or contribute to an excursion above any narrative or numeric water quality criteria. Per these federal requirements, the Permittee shall conduct whole effluent toxicity (WET) testing and toxic pollutant analyses according to the schedule outlined in Condition I.F of the draft permit.

If the results of these tests indicate a reasonable potential to cause an instream toxic impact, the Secretary may require additional WET testing, establish a WET limit, or require a Toxicity Reduction Evaluation.

5. Annual Monitoring

For all facilities with a design flow of greater than 0.1 MGD, 40 CFR § 122.21(j) requires the submittal of effluent monitoring data for those parameters identified in Condition I.G.2 of the draft permit. Samples must be collected once annually such that by the end of the term of the permit, all quarters have been sampled at least once, and the results will be submitted by December 31 of each year. Sampling in 2017 should be taken in the Fall. For subsequent sampling, the “Guidance for Annual Constituent Monitoring” document should be referred to determine the season in which samples should be taken each year.

D. Special Conditions

1. Waste Management Zone (WMZ)

As defined under 10 V.S.A. §1251(16), a WMZ is “a specific reach of Class B waters designated by a permit to accept the discharge of properly treated wastes that prior to treatment contained organisms pathogenic to human beings. Throughout the receiving waters, water quality criteria must be achieved but increased health risks exist due to the authorized discharge.”

The proposed permit retains the existing waste management zone (WMZ) beginning at the outfall of the Bartlett Bay WWTF and extending for a 200-foot radius in Lake Champlain.

2. Laboratory Proficiency Testing

To ensure there are adequate laboratory controls and appropriate quality assurance procedures, the Permittee shall conduct an annual laboratory proficiency test for the analysis of all pollutant parameters performed within their facility laboratory and reported as required by their NPDES permit. Proficiency test samples must be obtained from an accredited laboratory or as part of an EPA DMR-QA study. Results shall be submitted to the Secretary by December 31, annually.

3. Operation, Management, and Emergency Response Plans

As required by the revisions to 10 V.S.A. § 1278, promulgated in the 2006 legislative session, Condition I.I. has been included in the draft permit. This condition requires that the Permittee implement the Operation, Management, and Emergency Response Plan for the WWTF, sewage pump/ejector stations, and stream crossings as approved by the Secretary on June 2, 2009. Because it was not completed at the time of writing the draft permit, the Permittee shall prepare and submit to the Secretary for review and approval, an Operation, Management, and Emergency Response Plan for the sewage collection system by December 31, 2017. The Permittee shall implement the plan upon submittal.

4. Engineering Evaluation

To ensure the facility is maintained in good working order, an engineering evaluation and report condition is included in the permit. This condition requires the Permittee to conduct an in-depth inspection of and report on the treatment facility to identify and repair equipment, processes, and other possible deficiencies which may adversely affect effluent quality or proper operation. This type of evaluation is required once every 20 years and per Department of Environmental Conservation records was last completed in 1999.

5. Electric Power Failure Plan

To ensure the facility can continue operations even during the event of a power failure, within 90 days of the effective date of the permit, the Permittee must submit to the Secretary updated documentation addressing how the discharge will be handled in the event of an electric power outage.

6. Electronic Reporting

EPA recently promulgated a final rule to modernize the Clean Water Act reporting for municipalities, industries, and other facilities by converting to an electronic data reporting system. The final rule requires the inclusion of electronic reporting requirements in NPDES permits that become effective after December 21, 2015. The rule requires that NPDES regulated entities that are required to submit discharge monitoring reports (DMRs), including majors and nonmajors, individually permitted or covered by a general permit, must do so electronically after December 2016. The Secretary has created an electronic reporting system for DMRs and has recently trained facilities in its use. The Secretary completed a phased roll out of mandatory electronic reporting. As of December 2020, these NPDES facilities will also be expected to submit additional information electronically as specified in Appendix A in 40 C.F.R. Part 127.

7. Noncompliance Notification

As required by the passage of 10 V.S.A. § 1295, promulgated in the 2016 legislative session, Condition II.A.2 has been included in the draft permit. Section 1295 requires the Permittee to provide public notification of untreated discharges from wastewater facilities. The Permittee is required to post a public alert within one hour of discovery, and submit to the Secretary specified information regarding the discharge within 12 hours of discovery.

8. Reopener

This draft permit includes a reopener whereby the Secretary reserves the right to reopen and amend the permit to implement an integrated plan to address multiple CWA obligations.

E. Reasonable Potential Analysis

The Secretary has conducted a reasonable potential analysis, which is attached to this Fact Sheet as Attachment A. Based on this analysis, the Secretary has determined the available data indicate that this discharge does not have the potential to cause measurable change in the receiving water.

VIII. Procedures for Formulation of Final Determinations

The public comment period for receiving comments on this draft permit is from **May 31 through July 6, 2017** during which time interested persons may submit their written views on the draft permit. All written comments received by 4:30 PM on **July 6, 2017** will be retained by the Secretary and considered in the formulation of the final determination to issue, deny, or modify the draft permit. The period of comment may be extended at the discretion of the Secretary.

Written comments should be sent to:

Agency of Natural Resources
Department of Environmental Conservation
Watershed Management Division
One National Life Drive, Main Building, 2nd Floor
Montpelier, VT 05620-3522

Comments may also be faxed to 802-828-1544 or submitted by e-mail to ANR.WSMDWastewaterComments@vermont.gov

For additional information, contact Jessica Bulova at 802-828-1535.

The Secretary will hold a public hearing on **Thursday, July 6, 2:00 - 4:00 PM** in the Green Mountain Room, City of South Burlington City Hall, 575 Dorset Street, South Burlington, Vermont 05403. Any person may submit oral or written statements and data concerning the draft permit at the public hearing. The Secretary may establish reasonable limits on the time allowed for oral statements and may require the submission of statements in writing. All statements, comments, and data presented at the public hearing will be retained by the Secretary and considered in the formulation of the final determination to issue, deny, or modify the draft permit.

The complete application, draft permit, and other information are on file and may be inspected by appointment on the 2nd floor of the Main Building at One National Life Drive, Montpelier, Vermont. Copies may be obtained by calling 802-828-1535 from 7:45 AM to 4:30 PM Monday through Friday, and will be made at a cost based upon the current Secretary of State Official Fee Schedule for Copying Public Records. The draft permit and Fact Sheet may also be viewed on the Watershed Management Division's website at <http://www.watershedmanagement.vt.gov/>

ATTACHMENT A

Agency of Natural Resources
Department of Environmental Conservation

Watershed Management Division
1 National Life Drive 2 Main
802-828-1535

MEMORANDUM

To: Liz Dickson, Wastewater Program

From: Rick Levey, Monitoring, Assessment and Planning Program (MAPP) *Rick Levey 5/24/17*

Cc: Pete LaFlamme, Director, (WSMD)
Jessica Bulova, Manager, Wastewater Program
Neil Kamman, MAPP

Date: May 24, 2017

Subject: South Burlington -Bartlett Bay WWTF - Reasonable Potential Determination

Facility:

South Burlington "Bartlett Bay" WWTF
Permit No. 3-1284
NPDES No. VT0100358

Hydrology for South Burlington WWTF:

Design Flow: 1.250 MGD = 1.93 CFS

Receiving Water:

Lake Champlain, Bartlett Bay -South Burlington

MAPP has evaluated the draft permit for the South Burlington WWTF, in relation to available water quality monitoring data and modeling studies, to determine the protectiveness of the permit with respect to receiving water quality criteria. Figure 1 provides a graphical representation of the location of the diffuser outlet for this facility, relative to the most proximal location from which water quality monitoring data are available.

Phosphorus: Lake Champlain TMDL – Shelburne Bay Segment.

The ultimate receiving water for this facility is the Shelburne Bay Segment of Lake Champlain, a phosphorus-impaired segment of Lake Champlain subject to the 2016 Lake Champlain TMDLs promulgated by USEPA. That TMDL establishes a wasteload allocation for this facility not to exceed 0.345 MT/yr, a reduction of 0.533 MT from the prior limitation in the 2002 TMDL to which this facility was permitted previously. Although the new waste load allocation is based on an effluent TP concentration of 0.2 mg/L, this permit maintains the previous TP effluent limit of 0.8 mg/L, monthly average, which allows for TP discharge concentrations to fluctuate above 0.20 mg/L while holding the annual limit at a mass (total pounds) based on 0.20 mg/L. The Lake Champlain TMDL also contains a

reasonable assurance analysis and accountability framework demonstrating that the Main Lake Segment will achieve standards following implementation of the TMDL.

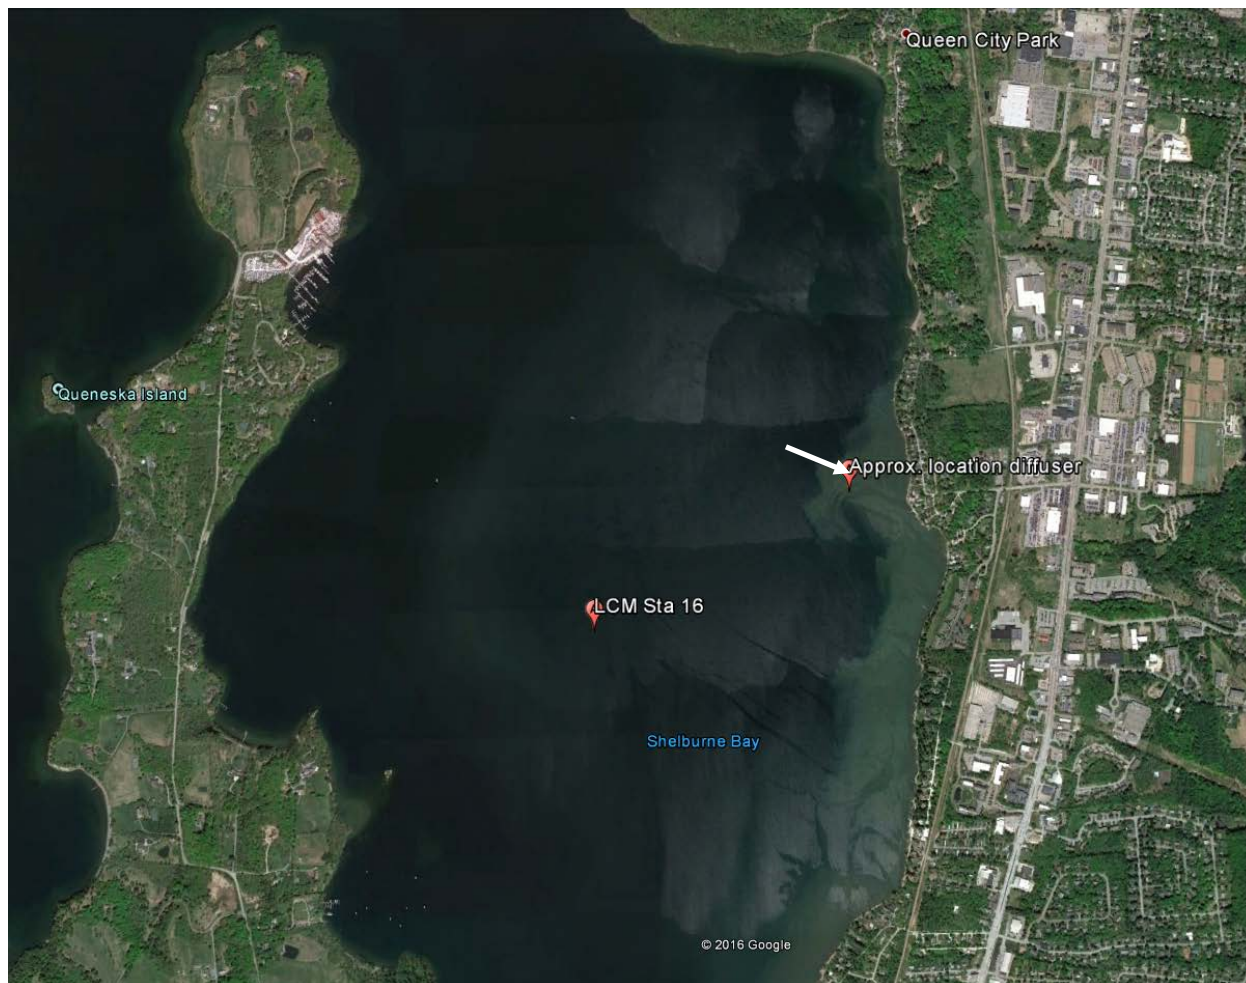


Figure 1. Approximate location of outlet and diffuser pipe, relative to the Lake Champlain Long-term Biological and Chemical Monitoring Program station. Arrow shows general location of outfall diffuser.

A modelling analysis (the Binkerd Environmental Diffuser Study, 1997) predicted dilution values of 33:1 achieved at the outfall by the 30-meter diffuser for flow rates of 1.25 MGD. DEC reviewed this study and is in agreement with the report and modeling, as such for mass balance computations within will use the 33:1 dilution.

Review of South Burlington “Bartlett Bay” monitoring records indicate that the average effluent TP concentrations in 2016 was 0.054 mg/L, at these conditions, and presuming effectiveness of these extremely high quality treatment practices for phosphorus at higher flows, the TP concentration within the Waste Management Zone (WMZ) which is designated as a 200-foot radius around outfall with a 33:1 dilution, would be only 1.6 µg/L-TP were the facility to be operating at full design flow (1.25 MGD).

Monitoring records for 2016 indicate that the facility has been operating at less than ½ design flow, at these conditions the TP concentration within the WMZ would be 0.8 µg/L-TP. These are conservative calculations and do not represent the significant dilution available outside of the WMZ.

Lake Champlain Water quality monitoring data are available from the [Lake Champlain Long-term Biological and Chemical Monitoring Program](#), from a monitoring station located approximately 3,500 feet west by southwest of the diffuser and mixing zone centroid. Results from this station indicate that arithmetic total phosphorus concentrations in the Shelburne Bay segment for the period 2015-2016 (April-Nov measurements) averaged 12.2 ug/L, and that long-term trends suggest that the average concentration in this segment has been declining slightly since 2012 (Figure 2).

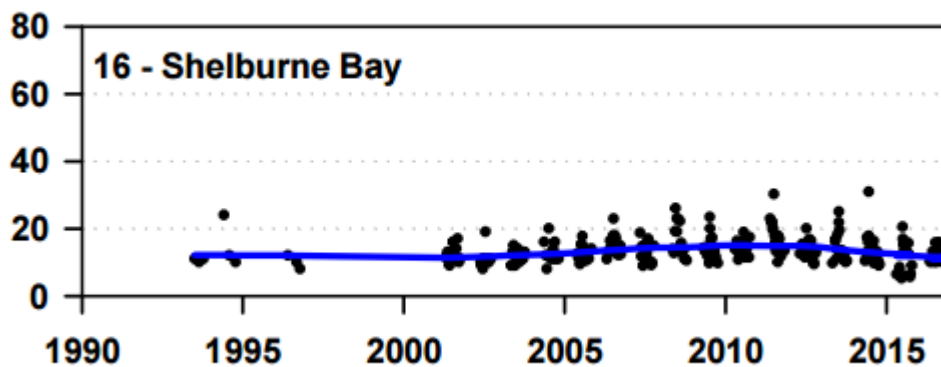


Figure 2. Long-term total phosphorus concentration monitored by the Lake Champlain Long-term Biological and Chemical Monitoring Program. Y-axis shows total phosphorus in ug/L.

Nitrogen

While total nitrogen is not a causal pollutant of designated uses in Lake Champlain, we evaluated the prospective load of total nitrogen in the mixing zone as a further validation of the sufficiency of treatment for the facility.

Annual constituent monitoring records for the last few years indicate that the average effluent TN concentration is about 20 mg/L-TN. This concentration would account for a 0.60 mg/L-TN increase in the mixing zone surrounding the diffuser. This is 88% lower than the total allowable NO₃ criteria of 5 mg/L, and is highly-conservative, presuming that all nitrogen measured was in the form of NO₃-N.

Water quality monitoring data available from the [Lake Champlain Long-term Biological and Chemical Monitoring Program](#) indicates that total nitrogen concentrations in the Shelburne Bay segment for the period 2015-2016 average 0.37 mg/L, and long-term trends suggest that the average concentration in this segment is flat to slightly declining over the period of record (Figure 3).

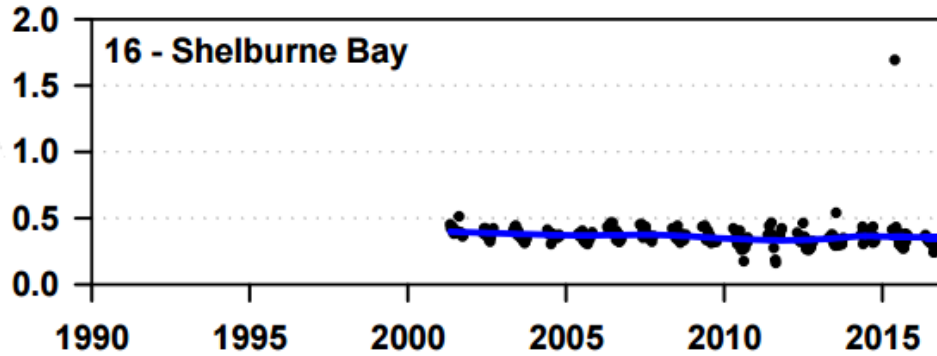


Figure 3. Long-term total nitrogen concentration monitored by the Lake Champlain Long-term Biological and Chemical Monitoring Program. Y-axis shows total nitrogen in mg/L.

Whole Effluent Toxicity (WET) and Priority Pollutant Testing:

40 CFR Part 122.44(d)(1) requires the Agency to assess whether the discharge causes, or has the reasonable potential to cause or contribute to an excursion above any narrative or numeric water quality criteria. The goal of the Vermont Toxic Discharge Control Strategy is to assure that the state water quality standards and receiving water classification criteria are maintained. Review of the most recent WET Test from 2004, a 2-species acute test, indicated that there was no effluent toxicity, even at 100% effluent. The draft permit requires a two-species 48-hour acute and 96 chronic WET test be conducted during August or September 2019 and 2021 and in March or April 2018 and 2020. If the results of this test indicate a reasonable potential to cause an instream toxic impact, the Department may require additional WET testing, establish a WET limit, or require a Toxicity Reduction Evaluation.

Ammonia Monitoring:

South Burlington Bartlett Bay WWTF effluent ammonia data from 2013 – 2016 (n=3) ranged from 0.21 – 0.35mg TAN/L. The South Burlington facility uses advanced treatment with Kruger A/O (Anaerobic/Oxic) extended aeration activated sludge process. The nitrification process which converts all of the ammonia in wastewater to nitrate using aerobic autotrophic bacteria in the treatment process results in very low effluent ammonia levels.

Using the highest effluent ammonia concentration of 0.35 mg/L TAN which was recorded in 2016; the 33:1 available dilution would result in a RWC of 0.011 mg TAN/L, which is significantly lower than the most stringent ammonia WQS. As such there is not a reasonable potential for VWQS excursion.

Metals

Composite effluent samples were analyzed for NPDES Appendix J pollutants in 2011, these pollutants include the priority metals. All metals were below detection except zinc, which was 0.17 mg/L. This concentration would account for a 5 µg/L -Zn (0.005 mg) increase in the mixing zone surrounding the diffuser. The WQS chronic criteria for Zn at hardness of 63 mg/L-CaCO₃ is 85 µg/L-Zn, more than a magnitude of order higher than the calculated increase in the mixing zone.

Since all metals except zinc were below detection, it is very unlikely that any metals would exceed WQS within the mixing zone. For example, nickel which was below the detection limit of 5 µg/L, would need to be at a concentration of 1221 µg/L-Ni to exceed the WQS chronic criteria of 37µg/L-Ni within the mixing zone.

These analyses help to illustrate the de minimus impact phosphorus, nitrogen, metals, or other pollutants within this discharge would pose to receiving waters. Considering this factor, MAPP has determined that this WWTF and its discharge quality pursuant to the draft permit does not have the potential to cause measurable change in the receiving water.